


AREA PER PHASE

PHASE 1	2,290 SQ. FT.
PHASE 2	13,030 SQ. FT.
PHASE 3	10,760 SQ. FT.
PHASE 4	4,430 SQ. FT.
PHASE 5	16,480 SQ. FT.
PHASE 6	1,090 SQ. FT.

PROJECT TEAM

DEVELOPER	NORTHWOOD CHURCH 1870 RUFE SNOW DR. KELLER, TEXAS 76248 (817)656-8150
CONTRACTOR	PETE DURANT & ASSOCIATES 2040 Golden Triangle Dr. FORT WORTH, TEXAS 76177 (817) 439-3213
ARCHITECT	GAYLEN HOWARD LAING ARCHITECT, INC. 1300 WEST RANDOL MILL ROAD, SUITE 100 ARLINGTON, TEXAS 76012 (817) 801-7200
STRUCTURAL ENGINEER	KWS STRUCTURAL CONSULTANTS 6116 MALVEY AVE. FT. WORTH, TX. 76116 (817) 377-8383
MEP ENGINEER	APE ENGINEERS 1340 DOVE DRIVE. MIDLOTHIAN, TX. 76065 972-723-9297

VICINITY MAP

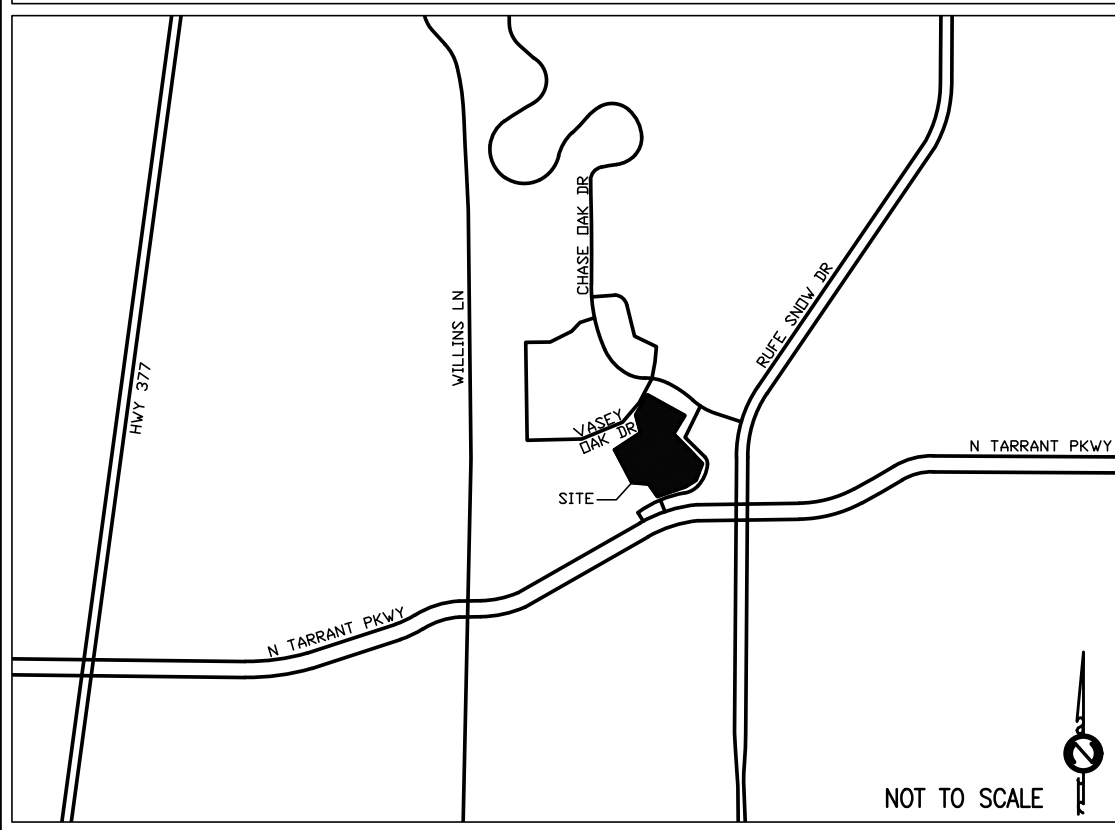

GENERAL NOTES

1. INTENT: DRAWINGS AND SPECIFICATIONS ARE INTENDED TO PROVIDE THE BASIS FOR PROPER COMPLETION OF THE WORK. SUITABLE FOR THE INTENDED USE OF THE OWNER. ANYTHING NOT EXPRESSLY SET FORTH BUT WHICH IS REASONABLY IMPLIED OR NECESSARY FOR PROPER PERFORMANCE OF THE PROJECT SHALL BE INCLUDED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANALYZING THE DOCUMENTS TO FULLY UNDERSTAND THE SCOPE OF THE CONSTRUCTION PROJECT. ALL CONDITIONS OF THE CONSTRUCTION HAVE NOT NECESSARILY BEEN DESCRIBED, DETAILED OR DRAWN. WHEN ADDITIONAL INFORMATION IS NECESSARY TO PROPERLY PRICE OR CONSTRUCT A PARTICULAR CONDITION, THE CONTRACTOR SHALL REQUEST SUCH INFORMATION IN WRITING FROM THE ARCHITECT. THE ARCHITECT WILL IN A REASONABLE TIME PROVIDE SUPPLEMENTARY DOCUMENTS TO PROVIDE THE NEEDED INFORMATION. LACK OF INFORMATION OR DETAIL WILL NOT BE EXCUSE FOR NOT INCLUDING ELEMENTS OF THE WORK IN THE CONTRACT PRICE.
2. ALL DIMENSIONS ON 3/32", 1/8", & 1/4" SCALE PLANS ARE TO THE FACE OF THE MASONRY OR CONCRETE OR THE FACE OF STUDS, UNLESS NOTED OTHERWISE.
3. VERIFY SIZE, LOCATION, AND CHARACTERISTICS OF ALL WORK AND EQUIPMENT TO BE INSTALLED OR RELOCATED WHETHER FURNISHED BY OWNER OR BY CONTRACTOR(S) BEFORE ANY CONSTRUCTION PERTAINING TO SAME HAS BEGUN.
4. VERIFY AND COORDINATE THE SIZE AND LOCATION OF ALL THE OPENINGS FOR STRUCTURAL, MECHANICAL AND ELECTRICAL WORK AND EQUIPMENT WITH ALL TRADES INVOLVED.
5. CEILING HEIGHTS INDICATED ON THE ROOM FINISH SCHEDULE ARE TAKEN FROM THE FINISH FLOOR ELEVATION. THE SIZE, LOCATION AND CHARACTERISTICS OF ALL MECHANICAL, ELECTRICAL, AND STRUCTURAL ITEMS SHALL BE VERIFIED BEFORE CEILING CONSTRUCTION IS BEGUN. COORDINATE WITH ALL TRADES TO MAINTAIN SCHEDULED CEILING HEIGHTS.
6. VERIFY THAT REQUIRED OPERATION AND MAINTENANCE CLEARANCES ARE PROVIDED FOR ALL EQUIPMENT ITEMS. INSTALL ALL ITEMS IN ACCORDANCE W/ THE MANUFACTURER'S WRITTEN INSTRUCTIONS, EXCEPT THAT THE SPECIFICATIONS HEREIN, WHERE MORE STRINGENT, SHALL SUPERSEDE. NOTIFY THE ARCHITECT IN WRITING OF ANY CONFLICTS.
7. PROVIDE FIRE RETARDANT TREATED WOOD BLOCKING FOR ALL ITEMS OR EQUIPMENT FASTENING INTO DRYWALL PARTITIONS.
8. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES REQUIRED FOR SAFE EXECUTION AND COMPLETION OF THE WORK, AND FOR INITIATING, MAINTAINING AND SUPERVISING ALL SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK.
9. ANY OMISSIONS OR INCONSISTENCIES ON THESE DRAWINGS OR ANY VARIATIONS OR AMBIGUITIES BETWEEN THESE DRAWINGS AND ACTUAL SITE AND CONSTRUCTION CONDITIONS AND/OR REQUIREMENTS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT IN WRITING AND RESOLVED AND DOCUMENTED IN WRITING BEFORE CONTINUING WITH THE WORK IN QUESTION.
11. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND GRADES. DO NOT SCALE DRAWINGS. NOTIFY THE ARCHITECT OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL VERIFY ALL MEASUREMENTS AT SITE AND BE RESPONSIBLE FOR COORDINATION WITH ACTUAL EQUIPMENT AND FIXTURE DIMENSIONS.
12. CAULKING AND SEALANT IS REQUIRED AT EXTERIOR JOINTS AROUND WINDOWS AND DOOR FRAMES, BETWEEN WALL AND FOUNDATIONS, BETWEEN WALL PANELS AT PENETRATIONS OR UTILITY SERVICES THROUGH WALLS, AND ALL OTHER OPENINGS IN THE EXTERIOR ENVELOPE. SEAL WITH APPROPRIATE SEALANT AS RECOMMENDED BY MANUFACTURER'S OF SUBJECT MATERIAL AND AS SPECIFIED IN PROJECT MANUAL SECTION 07900.
13. GENERAL CONTRACTOR SHALL REVIEW THE GEOTECHNICAL PROJECT REPORT AND BECOME FAMILIAR WITH THE SUBSURFACE CONDITIONS IN ORDER TO COORDINATE ALL UNDERGROUND UTILITIES AND TO PROVIDE FOR ANY ANTICIPATED SUBSURFACE WATER.
14. THE CONTRACTOR SHALL CONSTRUCT THE PROJECT IN ACCORDANCE WITH ALL APPLICABLE LOCAL, STATE AND FEDERAL CODES AND REGULATIONS. NOTIFY THE ARCHITECT OF ANY CONFLICT DISCOVERED BETWEEN THE CONTRACT DOCUMENTS AND THESE CODES.
15. THE CONTRACTOR SHALL PROVIDE COORDINATION AND ALL LOCAL SUBMITTALS/ APPROVALS FOR CONSTRUCTION OF UTILITIES, CATV, TELEPHONE, ETC.

LEGENDS

DRAFTING GRAPHICS

- A COLUMN NUMBER & COLUMN GRID CENTERLINE
- A101 DOOR IDENTIFICATION
REFER TO A8.1 FOR ALL OTHER DOORS
- 11/A4.1 DETAIL SECTION
- 17/A3.9 BUILDING/WALL SECTION
- 13/A3.1 EXTERIOR ELEVATION AND INTERIOR WALL ELEVATION
- 01/A5.5 DETAIL SYMBOL
- REFER TO STRUCTURAL AND MECHANICAL SHEETS FOR THEIR DISCIPLINE LEGEND
- A. ARCHITECTURE
C. CIVIL
L. LANDSCAPE
M. MECHANICAL
E. ELECTRICAL
P. PLUMBING
S. STRUCTURAL
F. FIRE PROTECTION
- 02/A2.1 DISCIPLINE SHEET NUMBER IN SERIES
SERIES NUMBER
DETAIL NUMBER ON SHEET
- ROOM NAME & NUMBER
168
- PLAN NOTE BY NUMBER
- WINDOW TYPE
- LOUVER TYPE

INDEX OF DRAWINGS

GENERAL

SHEET	DESCRIPTION
G1.0	FLOOR PLAN/ABBR./LEGENDS/MAP/INDEX
G2.0	DESIGN CRITERIA & LIFE SAFETY PLAN
G2.1	OVERALL SITE PLAN
G3.0	ACCESSIBILITY STANDARDS
G3.1	ACCESSIBILITY STANDARDS

ARCHITECTURAL

SHEET	DESCRIPTION
A1.0	PHASE 1 FLOOR PLANS
A1.1	PHASE 1 INT. ELEVATIONS
A1.2	PHASE 1 BUILDING SECTIONS & DETAILS
A2.0	PHASE 2 DEMO FLOOR PLAN
A2.1	PHASE 2 DEMO REFLECTED CEILING PLAN
A2.2	PHASE 2 FLOOR PLAN
A2.3	PHASE 2 FLOOR PLAN & INT. ELEVATIONS
A2.4	PHASE 2 REFLECTED CEILING PLAN
A2.5	PHASE 2 BUILDING SECTIONS
A3.0	PHASE 3 DEMO FLOOR PLAN
A3.1	PHASE 3 DEMO REFLECTED CEILING PLAN
A3.2	PHASE 3 FLOOR PLAN
A3.3	PHASE 3 FLOOR PLAN & INT. ELEVATIONS
A3.4	PHASE 3 INT. ELEVATIONS
A3.5	PHASE 3 REFLECTED CEILING PLAN
A3.6	PHASE 3 BUILDING SECTIONS
A4.0	PHASE 4 DEMO FLOOR PLANS
A4.1	PHASE 4 FLOOR PLAN & INT. ELEVATIONS
A4.2	PHASE 4 BUILDING SECTIONS
A5.0	PHASE 5 DEMO FLOOR PLAN
A5.1	PHASE 5 DEMO REFLECTED CEILING PLAN
A5.2	PHASE 5 FLOOR PLAN
A5.3	PHASE 5 FLOOR PLANS & INT. ELEVATIONS
A5.4	PHASE 5 REFLECTED CEILING PLAN
A5.5	PHASE 5 BUILDING SECTIONS

ARCHITECTURAL

SHEET	DESCRIPTION
A5.6	PHASE 5 BUILDING SECTIONS
A6.0	PHASE 6 FLOOR PLANS & INT. ELEVATIONS
A6.1	PHASE 6 EXT. ELEVATIONS & BLDG SECTIONS

STRUCTURAL

SHEET	DESCRIPTION
S1.1	STRUCTURAL GENERAL NOTES
S1.2	LIGHT GAGE NOTES, SCHEDULES & DETAILS
S2.1	OLD SANCTUARY, NEW CHAPEL FOUND. PLAN
S2.2	NEW CONNECTOR FOUND. & FRAMING PLAN
S3.1	FOUNDATION SECTIONS & DETAILS
S3.2	FOUNDATION SECTIONS & DETAILS
S3.3	FOUNDATION SECTIONS & DETAILS
S4.1	FRAMING SECTIONS & DETAILS
S4.2	FRAMING SECTIONS & DETAILS
S4.3	FRAMING SECTIONS & DETAILS

MEP

SHEET	DESCRIPTION
M0.1	GENERAL MECH. NOTES
M1.1	PHASE 1 FLOOR PLAN - MECH. DEMO
M2.1	PHASE 2 FLOOR PLAN - MECH. DEMO
M2.2	PHASE 2 FLOOR PLAN - MECHANICAL
M2.3	PHASE 2 MECHANICAL SCHEDULE/DETAIL
M3.1	PHASE 3 FLOOR PLAN - MECH. DEMO
M3.2	PHASE 3 FLOOR PLAN - MECHANICAL
M4.1	PHASE 4 FLOOR PLAN - MECHANICAL
M5.1	PHASE 5 FLOOR PLAN - MECH. DEMO
M5.2	PHASE 5 FLOOR PLAN - MECHANICAL
M6.1	PHASE 6 FLOOR PLAN - MECH. DEMO
M6.2	PHASE 6 MECHANICAL SCHEDULE/DETAILS
E0.1	GENERAL ELEC. NOTES & SYMBOLS
E1.1	PHASE 1 FLOOR PLAN - ELEC. DEMO
E1.2	PHASE 1 FLOOR PLAN - ELECTRICAL

MEP


SHEET	DESCRIPTION
E2.1	PHASE 2 FLOOR PLAN - POWER DEMO
E2.2	PHASE 2 FLOOR PLAN - LIGHTING DEMO
E2.3	PHASE 2 FLOOR PLAN - POWER
E2.4	PHASE 2 FLOOR PLAN - LIGHTING
E3.1	PHASE 3 FLOOR PLAN - POWER DEMO
E3.2	PHASE 3 FLOOR PLAN - LIGHTING DEMO
E3.3	PHASE 3 FLOOR PLAN - POWER
E3.4	PHASE 3 FLOOR PLAN - LIGHTING
E4.1	PHASE 4 FLOOR PLAN - ELEC. DEMO
E4.2	PHASE 4 FLOOR PLAN - ELECTRICAL
E5.1	PHASE 5 FLOOR PLAN - POWER DEMO
E5.2	PHASE 5 FLOOR PLAN - LIGHTING DEMO
E5.3	PHASE 5 FLOOR PLAN - POWER
E5.4	PHASE 5 FLOOR PLAN - LIGHTING
E6.1	PHASE 6 FLOOR PLAN - ELECTRICAL
P0.1	GENERAL PLUMBING NOTES
P1.1	PHASE 1 FLOOR PLAN - PLUMBING DEMO
P2.1	PHASE 2 FLOOR PLAN - PLUMBING DEMO
P2.2	PHASE 2 FLOOR PLAN - PLUMBING
P3.1	PHASE 3 FLOOR PLAN - PLUMBING DEMO
P3.2	PHASE 3 FLOOR PLAN - PLUMBING
P4.1	PHASE 4 FLOOR PLAN - PLUMBING DEMO
P5.1	PHASE 5 FLOOR PLAN - PLUMBING DEMO
P5.2	PHASE 5 FLOOR PLAN - PLUMBING
P5.3	PHASE 5 PLUMBING RISER/SCHEDULE
P6.1	PHASE 6 FLOOR PLAN - PLUMBING



CONTEXT
OVERALL FLOOR PLAN

01
G1.0

SCALE: 1"=30'

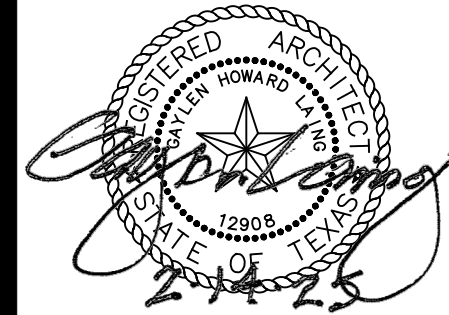

DATE: 08/14/24

ISSUE:

REVISION:

REVISED 04-30-25

SHEET TITLE:

OVERALL SITE
PLAN, LEGEND,
MAP, & INDEX

G1.0


LIFE SAFETY SYMBOL LEGEND

● FE	FIRE EXTINGUISHER ON WALL BRACKET
▨ FEC	FIRE EXTINGUISHER CABINET AND EXTINGUISHER (AS REQUIRED PER NFPA 10)
X →	TRAVEL DISTANCE TO EXIT
FACP	FIRE ALARM CONTROL PANEL (VERIFY LOCATION WITH LOCAL FIRE DEPT.)
⊗	EXIT SIGN
OCCUPANT LOAD	
TOTAL SQ. FT.	SQ. FT. PER OCC.
OCCUPANT LOAD ALLOWANCE DATA	

OCCUPANCY TABULATION

ROOM NAME	ROOM AREA	AREA PER OCCUPANT	OCCUPANT LOAD
BLDG A - NO SCOPE		58,311 S.F.	
BLDG B			
CHapel/Multi-Lingual (101)	2,761	15	185
ADULT CLASSROOM	3,332	15	223
CHILDREN CLASSROOM	1,527	15	102
OFFICE	1,919	150	13
STORAGE	799	300	3
JOY/Multi-Ability (116)	1,154	15	77
ELECTRICAL	204	300	1
KITCHEN	567	200	3
PANTRY	122	300	1
JANITOR	223	300	1
EDUCATION/WORK ROOM (218)	600	15	40
FELLOWSHIP HALL (500)	2,072	15	139
NURSERY	353	15	24
TODDLER	610	15	41
OCCUPANT LOAD		853	
TOTAL REQUIRED EXIT WIDTH AT .20"x OCC		170.6"	
TOTAL PROVIDED EXIT WIDTH		324"	
BLDG C			
CHILDREN'S WORSHIP	2,717	15	182
CHILDREN'S CLASSROOM	7,965	15	531
OFFICE	363	150	3
STORAGE	121	300	1
OCCUPANT LOAD		717	
TOTAL REQUIRED EXIT WIDTH AT .20"x OCC		143.4"	
TOTAL PROVIDED EXIT WIDTH		216"	
BLDG D			
MISSION	847	15	57
CONFERENCE ROOM	214	15	15
OFFICE	693	150	5
STORAGE	64	300	1
OCCUPANT LOAD		78	
TOTAL REQUIRED EXIT WIDTH AT .20"x OCC		15.6"	
TOTAL PROVIDED EXIT WIDTH		108"	
EXIT DOOR WIDTHS & CAPACITY BEFORE RENO			
DOOR WIDTH (MIN. REQ'D 329.6")		720"	648"
DOOR CAPACITY		5,280 PERSONS	4,320 PERSONS

OCCUPANCY DIAGRAM

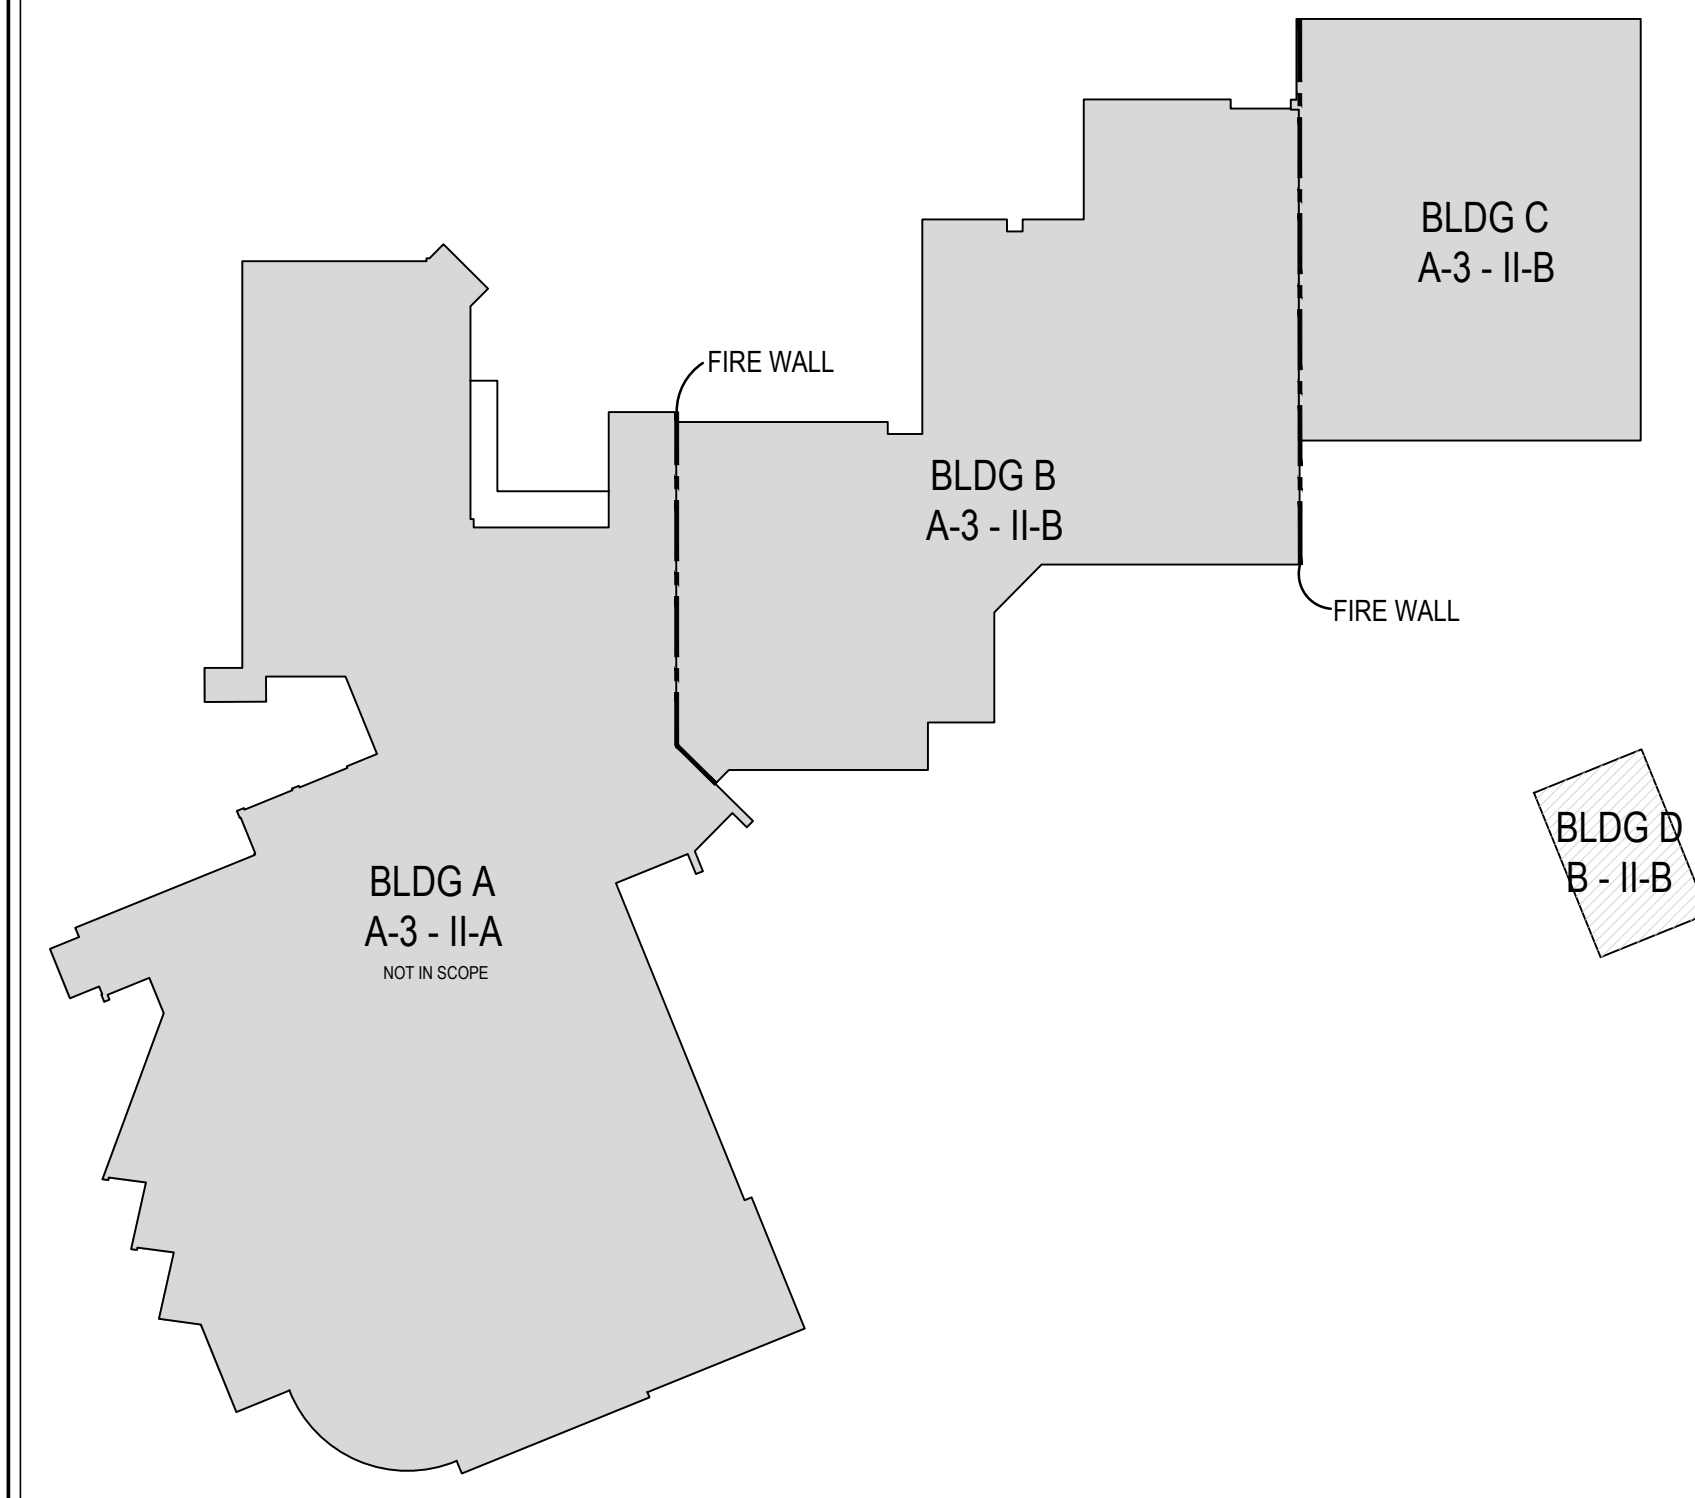

BUILDING INFORMATION


LOCATION:	1870 RUFÉ SNOW DR. KELLER, TEXAS 76248 TARRANT COUNTY
LOT AREA:	920,033 SQ.FT. - 21.121 ACRES
PROJECT INFORMATION	
DESCRIPTION:	RENOVATIONS TO A WORSHIP FACILITY WITH CLASSROOMS
BUILDING SUMMARY	
USE AND OCCUPANCY	
BUILDING A, B, & C:	ASSEMBLY GROUP A-3
BUILDING D:	ASSEMBLY GROUP B
CONSTRUCTION TYPE	
BUILDING A:	II-A
BUILDING B, C, & D:	II-B
BUILDING AREA	
BLDG-A EXISTING GROSS FLOOR AREA (PRE-RENOVATION)	58,311 S.F.
CORRIDOR ADDITION GROSS FLOOR AREA	1,074 S.F.
BLDG-A TOTAL GROSS FLOOR AREA (POST-RENOVATION)	59,385 S.F.
BLDG-B TOTAL GROSS FLOOR AREA	28,198 S.F.
BLDG-C TOTAL GROSS FLOOR AREA	16,480 S.F.
BLDG-D TOTAL GROSS FLOOR AREA	2,290 S.F.
TOTAL GROSS FLOOR AREA (POST-RENOVATION)	106,353 S.F.
APPLICABLE CODES	
2021 INTERNATIONAL MECHANICAL CODE	
2020 NATIONAL ELECTRICAL CODE	
2021 INTERNATIONAL PLUMBING CODE	
2021 INTERNATIONAL BUILDING CODE	
2021 INTERNATIONAL ENERGY CONSERVATION CODE	
2021 INTERNATIONAL FIRE CODE	
2021 INTERNATIONAL FUEL GAS CODE	
2012 TEXAS ACCESSIBILITY STANDARD	


BUILDING DESIGN CRITERIA

OCCUPANCY CLASSIFICATION: A3	
OCCUPANCIES CONTAINED WITHIN BUILDING:	
A3: SANCTUARY, LOBBY, CLASSROOMS WITHIN PLACES OF WORSHIP	
B: OFFICE SPACES, NOT SPRINKLED	
THE FACILITY SHALL BE FULLY SPRINKLED IN ACCORDANCE WITH A NFPA 13	
THE FACILITY SHALL BE EQUIPPED WITH A FIRE ALARM AND FIRE DETECTION SYSTEM	
BUILDING HEIGHT: 85' ALLOWABLE PER TABLE 504.3	
FIRE RESISTANCE RATINGS:	
PER TABLE 601 (II-B)	0 HOUR
STRUCTURAL FRAME:	0 HOUR
STRUCTURAL STEEL:	0 HOUR
BEARING WALLS - EXTERIOR:	0 HOUR
NON-BEARING WALLS - EXTERIOR:	0 HOUR
BEARING WALLS - INTERIOR:	0 HOUR
NON-BEARING WALLS - INTERIOR:	0 HOUR
CORRIDOR WALLS:	0 HOUR
FLOOR CONSTRUCTION:	0 HOUR
ROOF/CEILING:	0 HOUR
TRAVEL DISTANCE PER TABLE 1017.2	
GROUP A:	250 FT. ALLOWED
GROUP B:	300 FT. ALLOWED

CHapel/Multi-Lingual 101 :
SPACE IS DEDICATED FOR THE PRIMARY USE OF RELIGIOUS RITUAL AS DEFINED BY THE OWNER, A RELIGIOUS ORGANIZATION AND IN RELATION TO THE ADMINISTRATIVE RULES OF THE TEXAS DEPARTMENT OF LICENSING AND REGULATION 16 ADMINISTRATIVE CODE, CHAPTER 68, SUBCHAPTER B, RULE §68.30.

CLASSROOMS AND CHILDREN'S WORSHIP :
PER SECTIONS 305.1.1, EDUCATIONAL GROUP E, ALL RELIGIOUS EDUCATIONAL ROOMS AND RELIGIOUS AUDITORIUMS, WHICH ARE ACCESSORY TO PLACES OF RELIGIOUS WORSHIP IN ACCORDANCE WITH SECTION 303.1.4 AND HAVE OCCUPANT LOADS OF LESS THAN 100 PER ROOM OR SPACE, SHALL BE CLASSIFIED AS GROUP A-3 OCCUPANCIES.

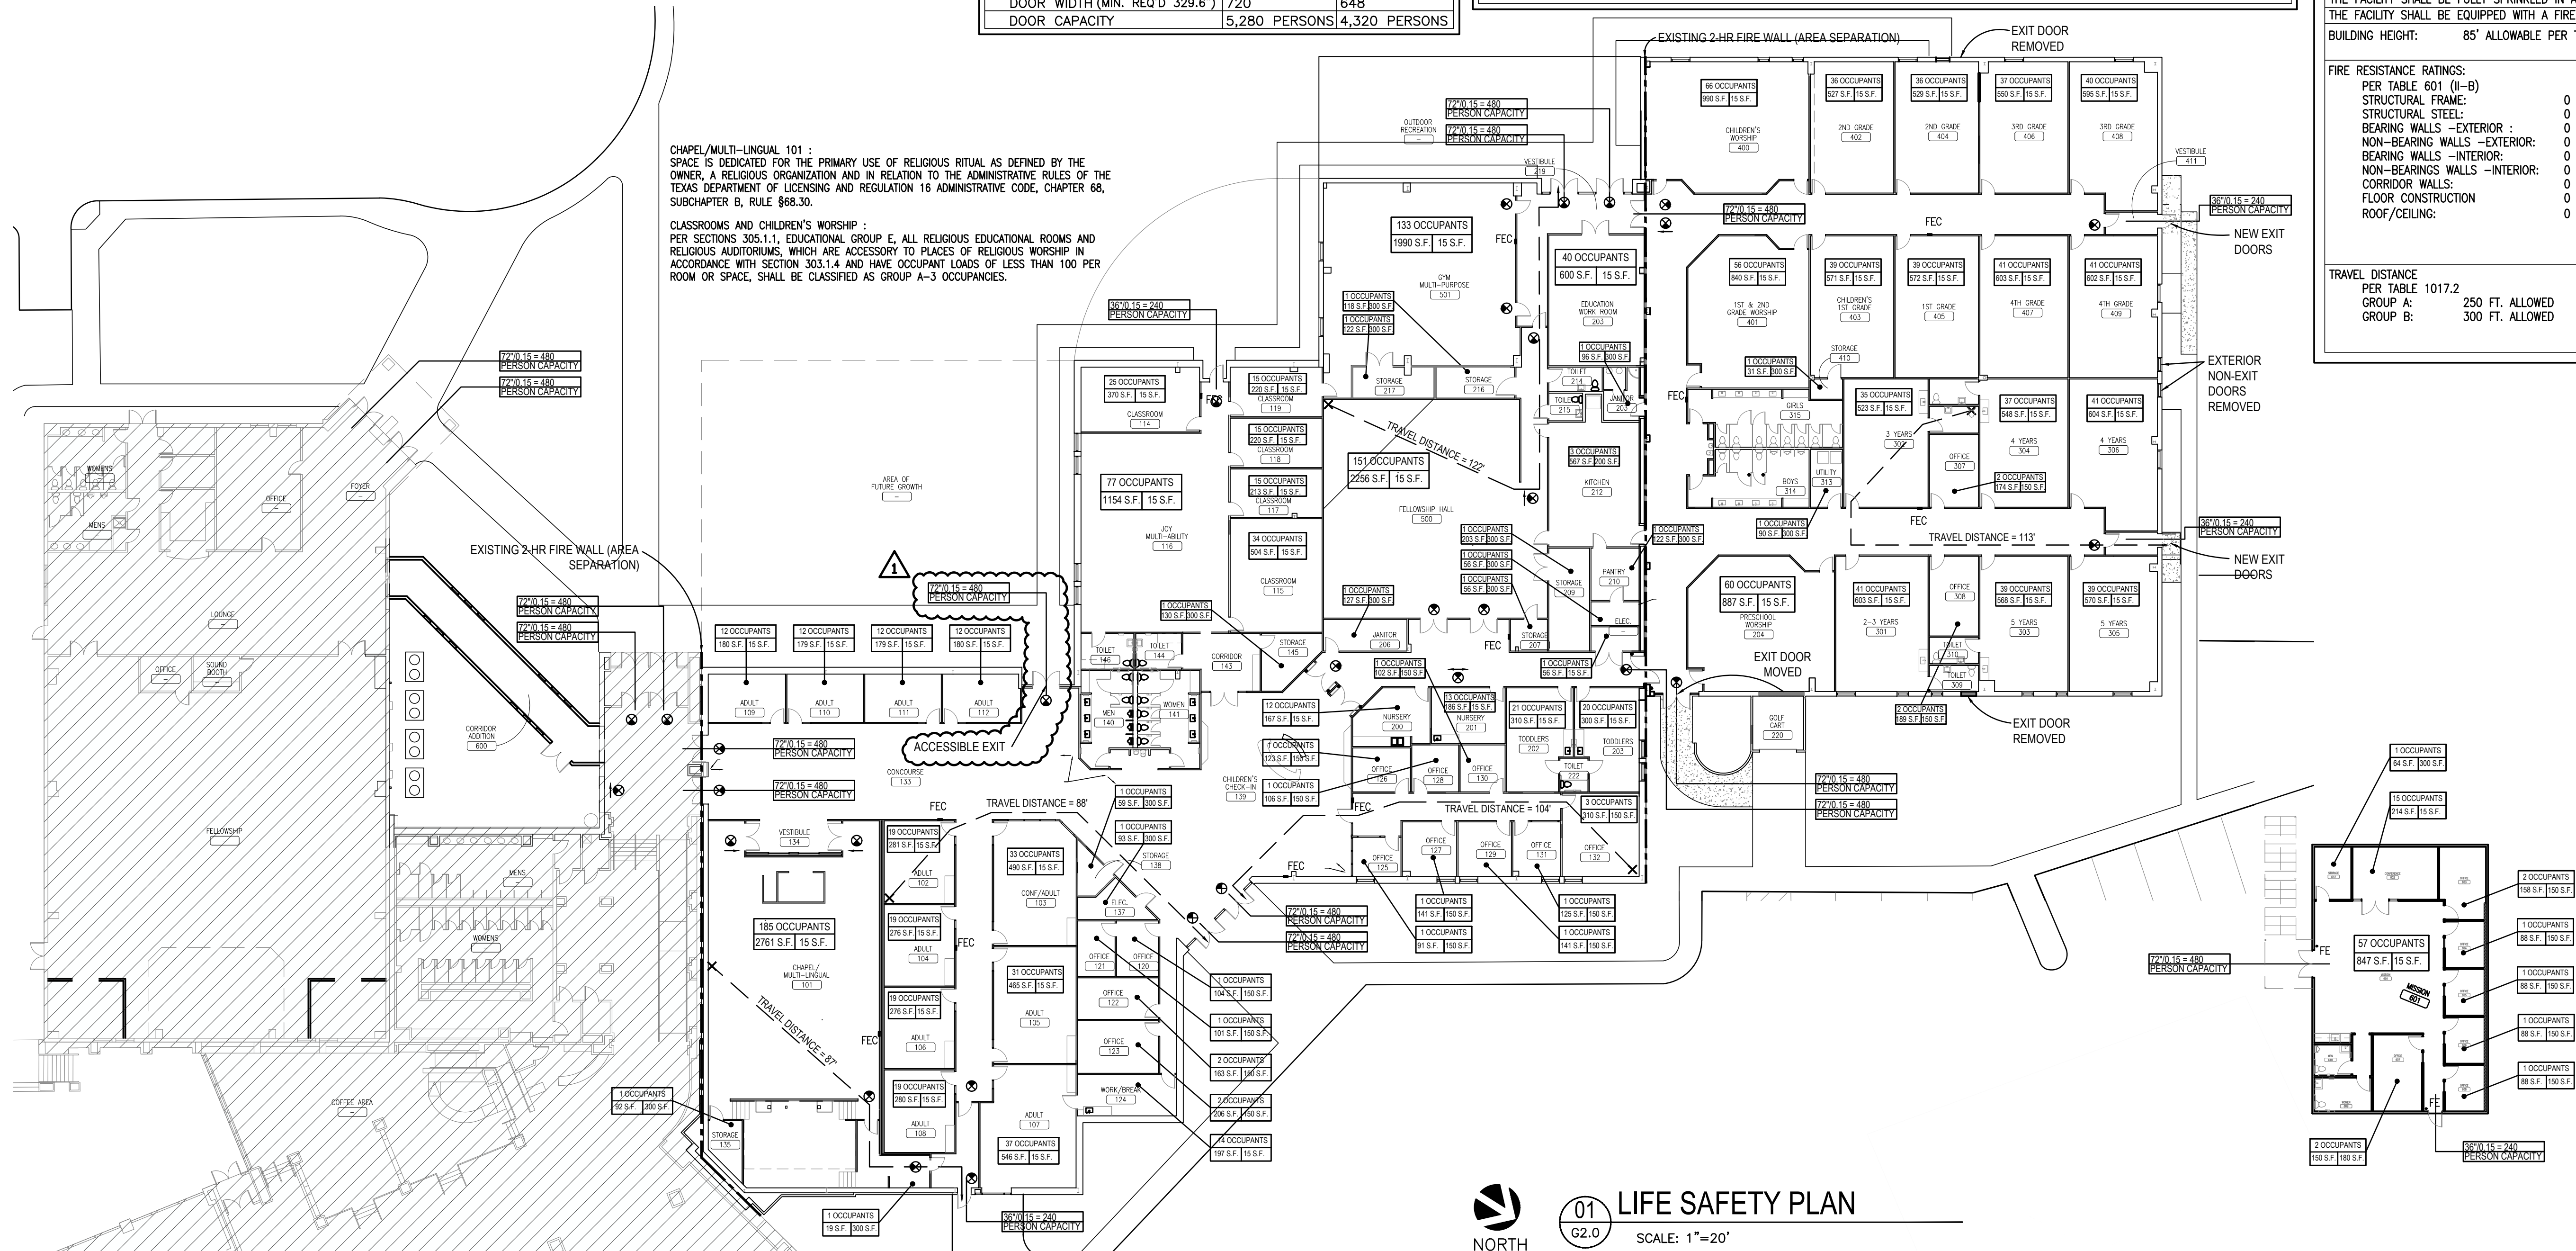

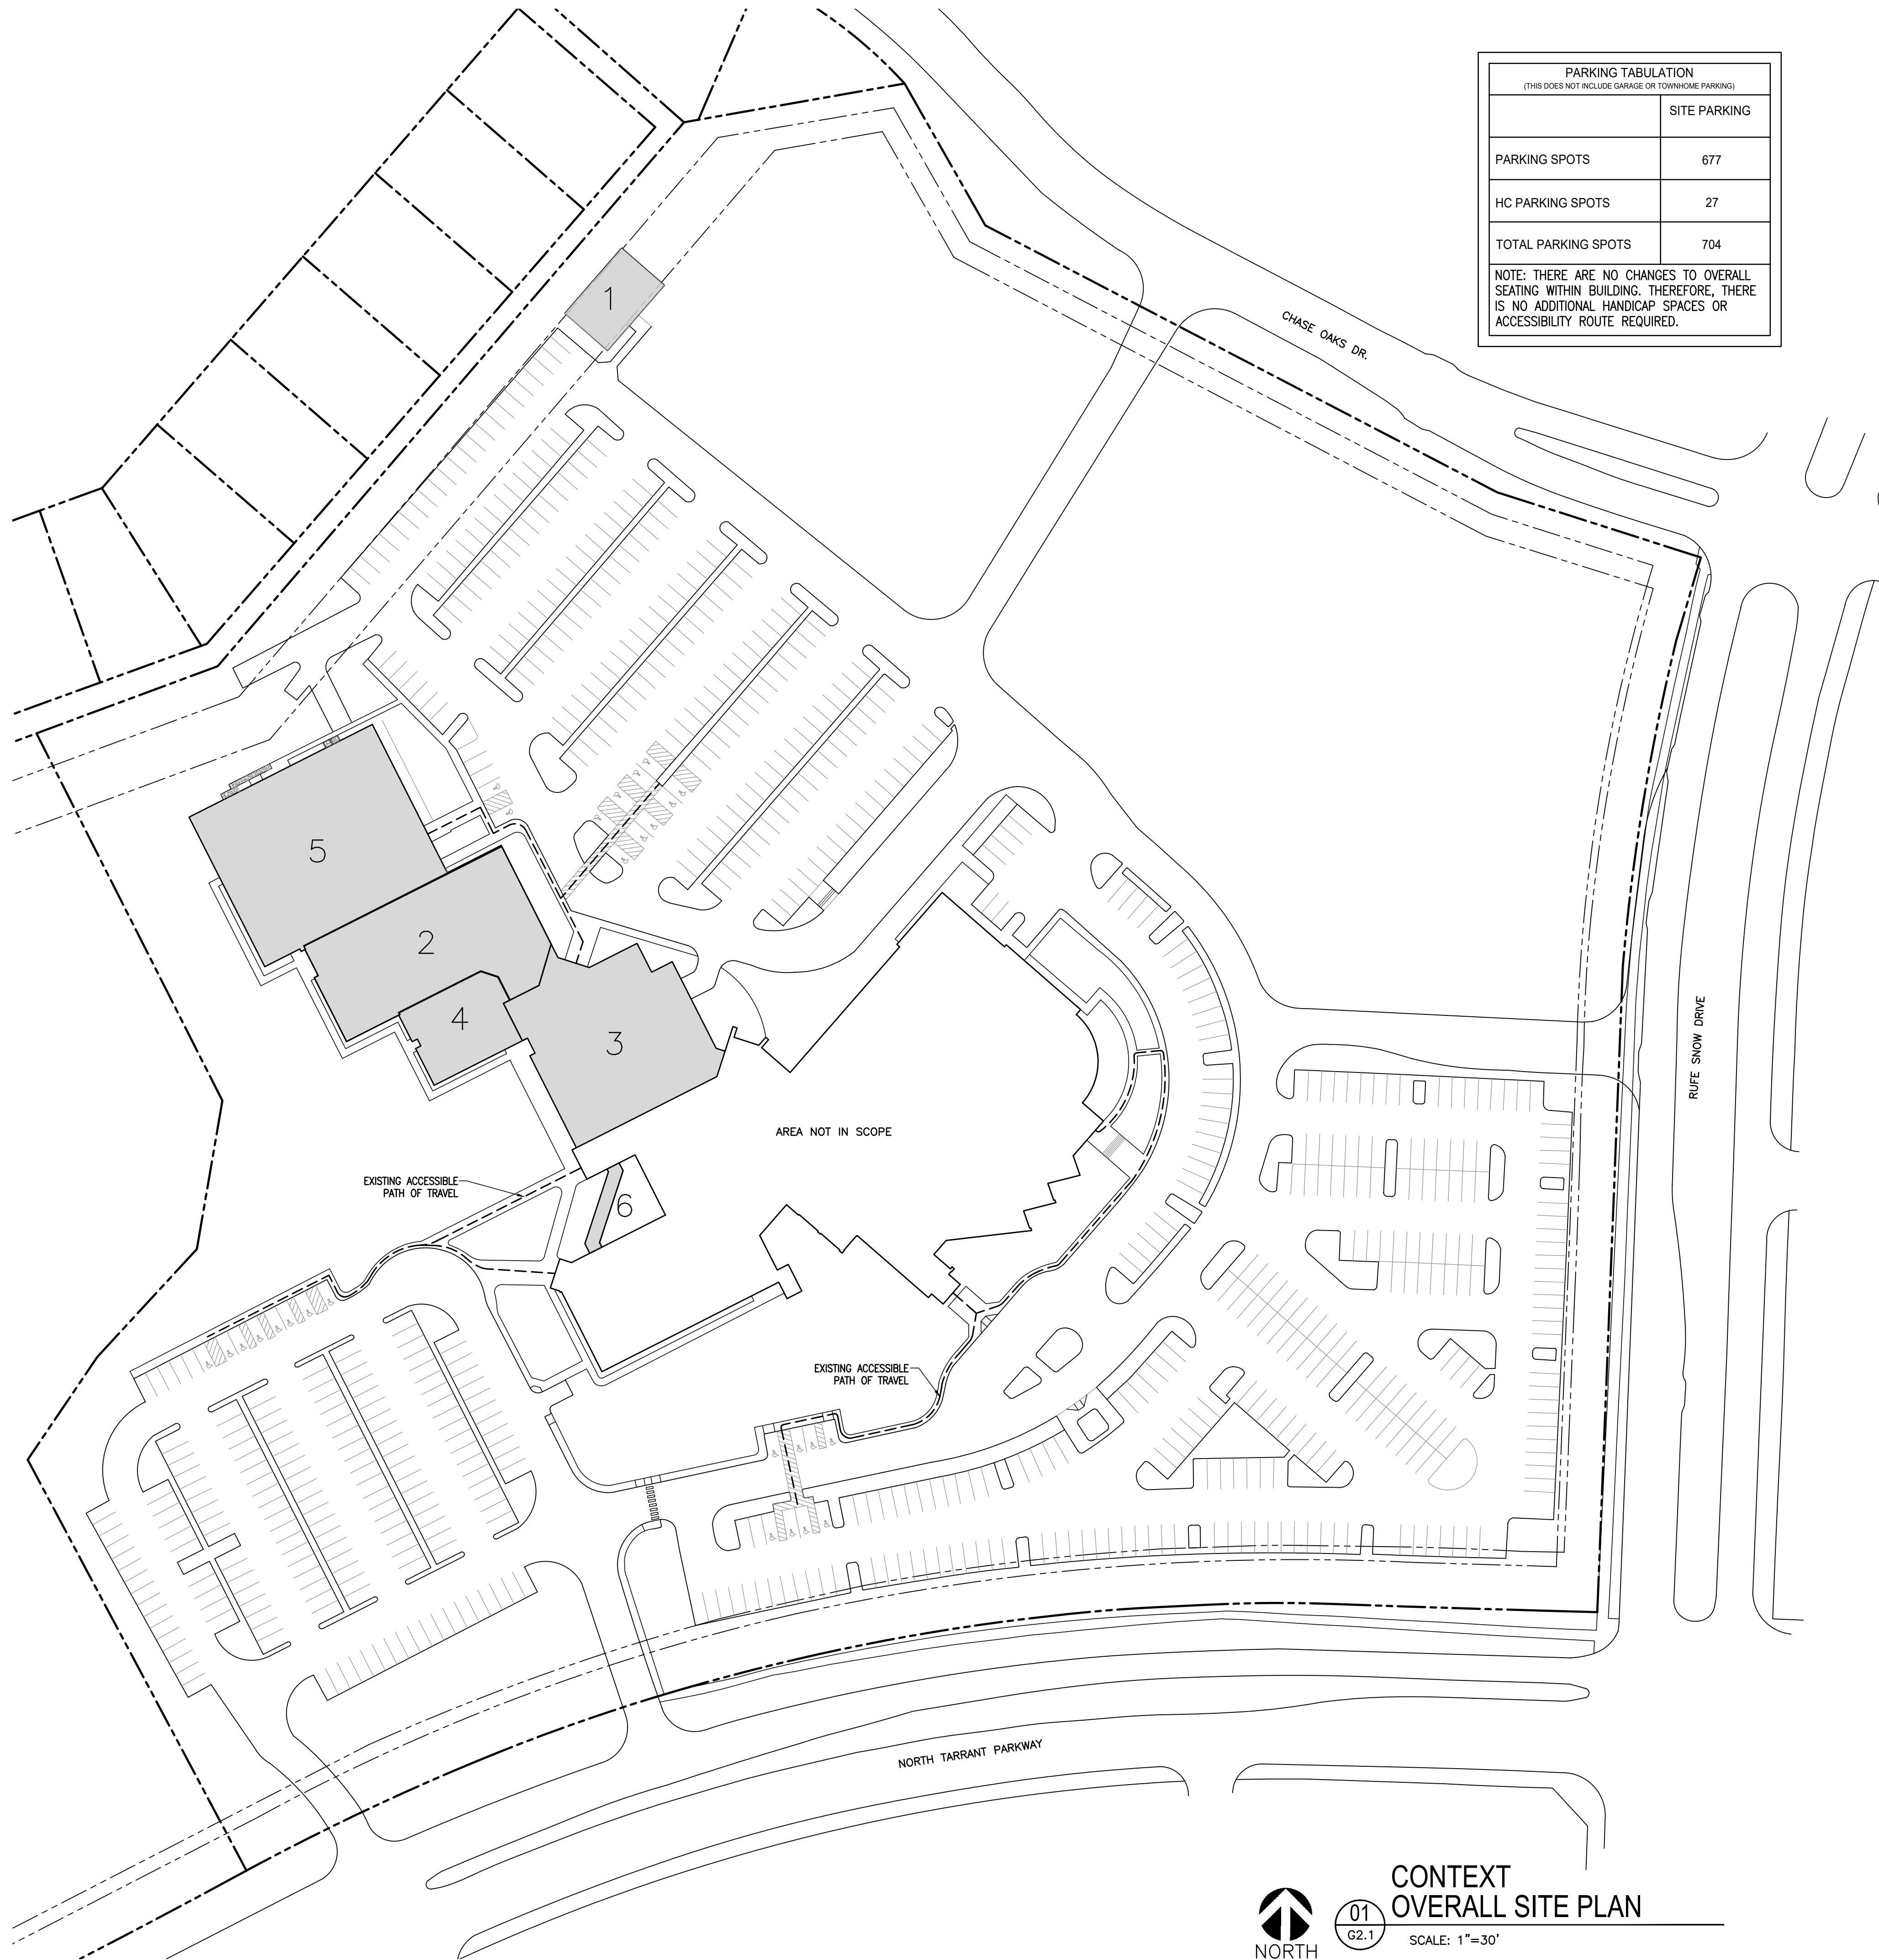


PARKING TABULATION (THIS DOES NOT INCLUDE GARAGE OR TOWNHOME PARKING)	
	SITE PARKING
PARKING SPOTS	677
HC PARKING SPOTS	27
TOTAL PARKING SPOTS	704
NOTE: THERE ARE NO CHANGES TO OVERALL SEATING WITHIN BUILDINGS. THEREFORE, THERE IS NO ADDITIONAL HANDICAP SPACES OR ACCESSIBILITY ROUTE REQUIRED.	



CONTEXT
OVERALL SITE PLAN

01
62.1

SCALE: 1"=30'

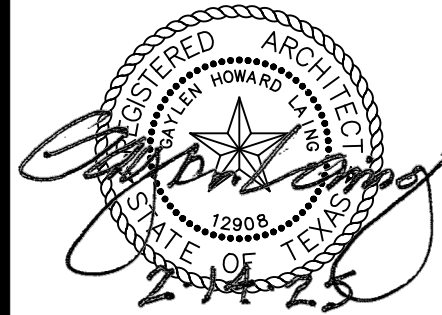

DATE: 08/14/24

ISSUE:

REVISION:

△ REVISED 04-30-25

SHEET TITLE:

OVERALL
SITE PLAN

G2.1

NORTHWOOD CHURCH


RENOVATIONS

1870 RUFE SNOW DR.
KELLER, TEXAS 76248


ARCHITECTURE
PLANNING
INTERIOR DESIGN

GHILA




1300 WEST RANDOL MILL ROAD, ARLINGTON, TEXAS 76012
817.801.7200
www.ghila-inc.com

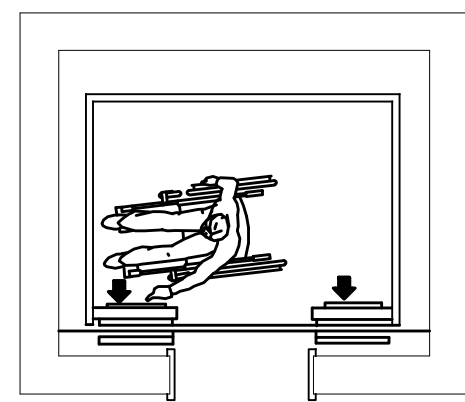


Alternate Locations of Panels with Center Opening Door

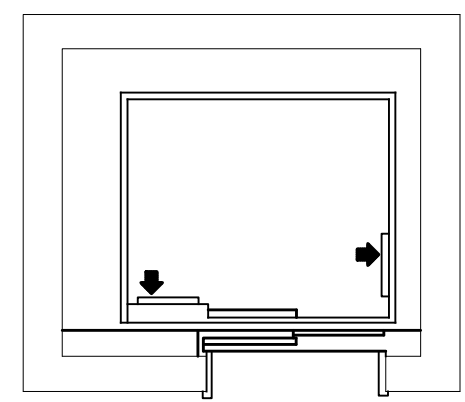


Alternate Locations of Panels with Side Opening Door

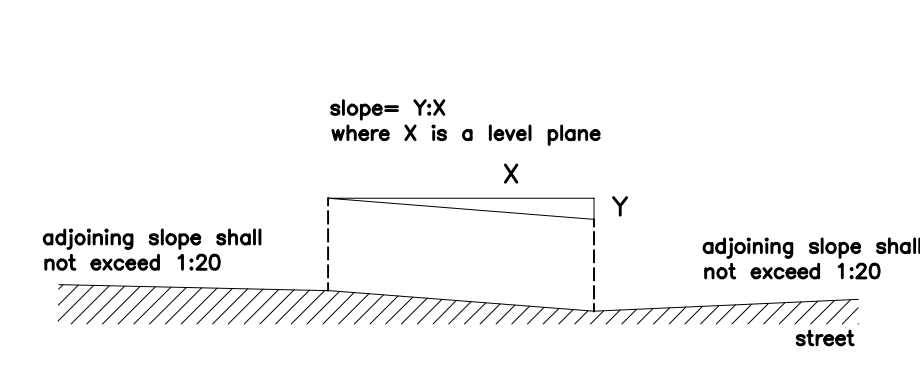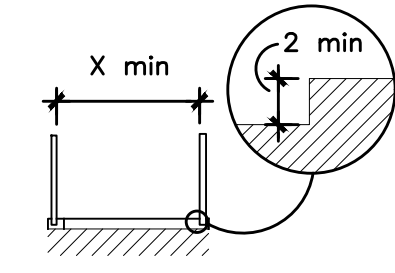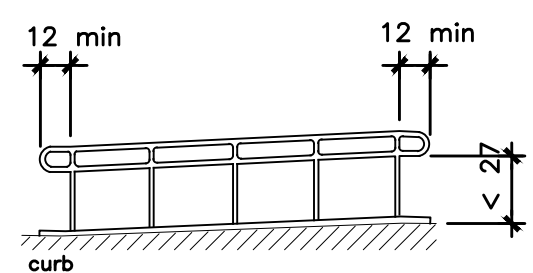


Measurement of Curb Ramp Slopes

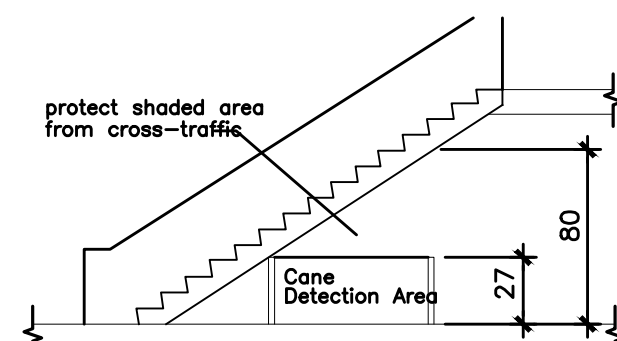


Overhead Hazards

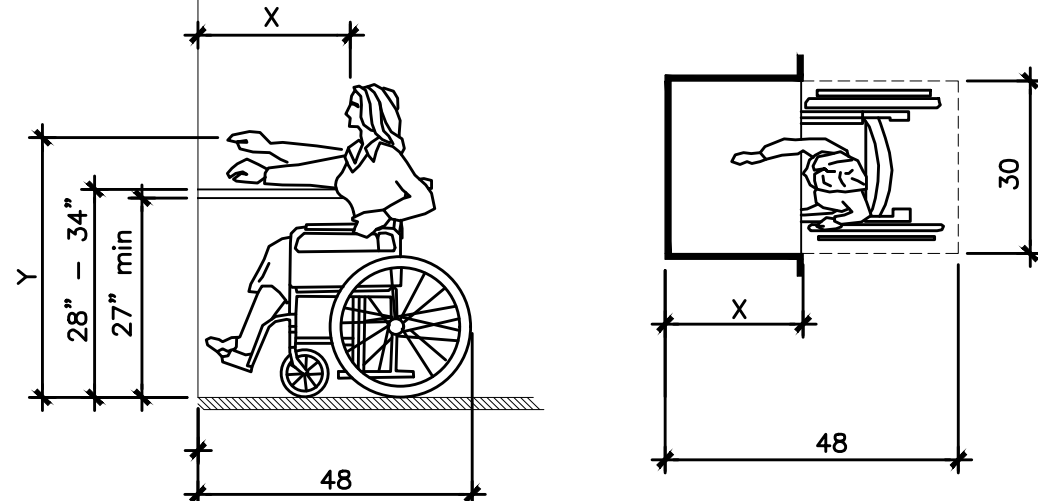


NOTE: X shall be 25 in. When x < 20 in, then y shall be 48 in maximum. When x is 20 to 25 in, then y shall be 44 in maximum.

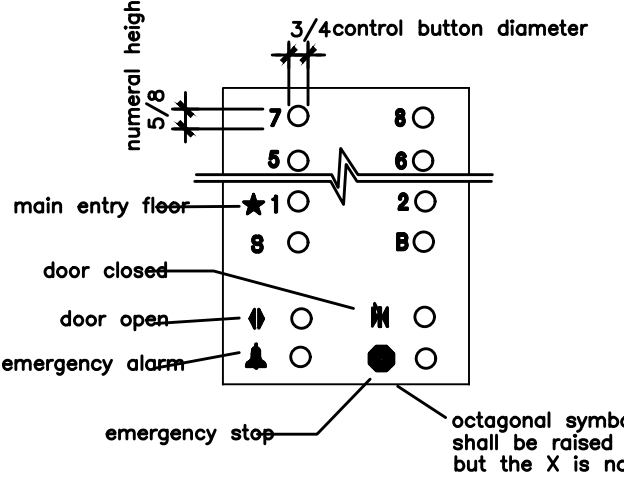


Panel Detail

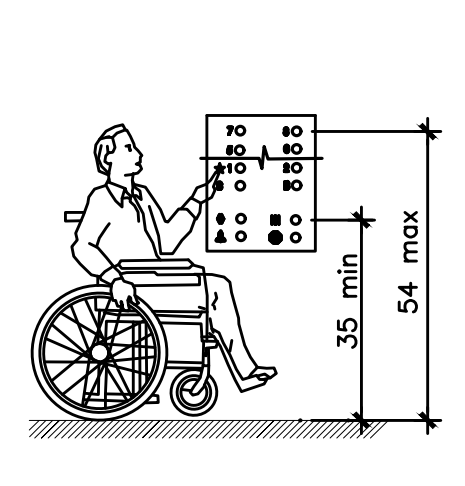


Car Controls

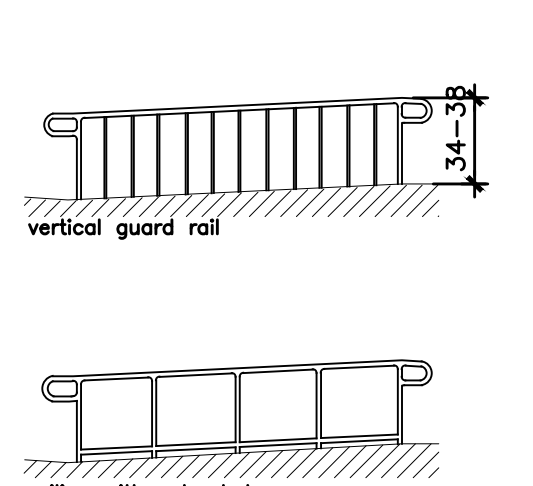


vertical guard rail

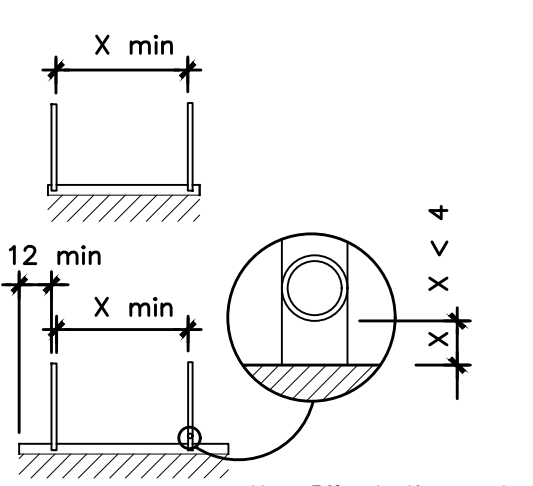


railing with extended platform or bottom rail < 4" above paving

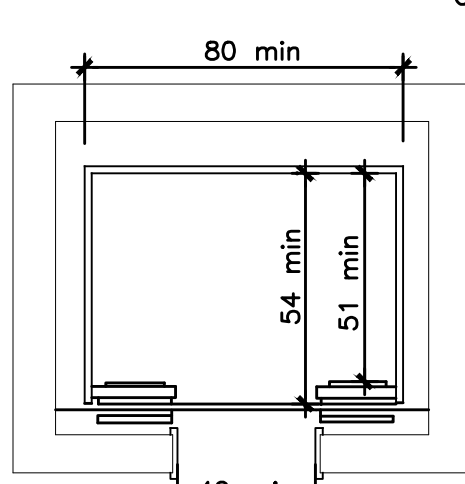

Minimum Dimensions of Elevator Cars

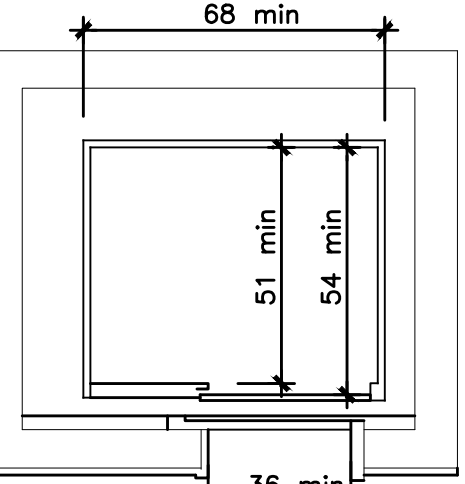


Car Control Height

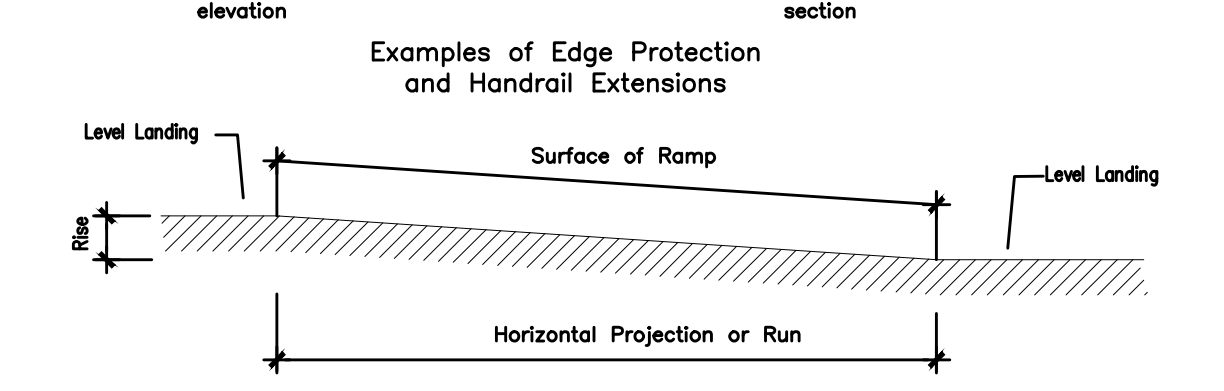


Examples of Edge Protection and Handrail Extensions

Slope	Maximum Rise	Maximum Horizontal Projection
1:12 to < 1:16	in mm	ft m
1:12 to < 1:16	30 760	30 9
1:16 to < 1:20	30 760	40 12


Components of a Single Ramp Run and Sample Ramp Dimensions

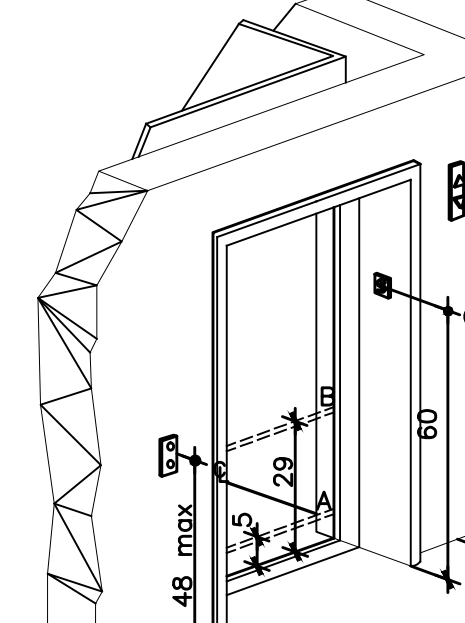


Hoistway and Elevator Entrances

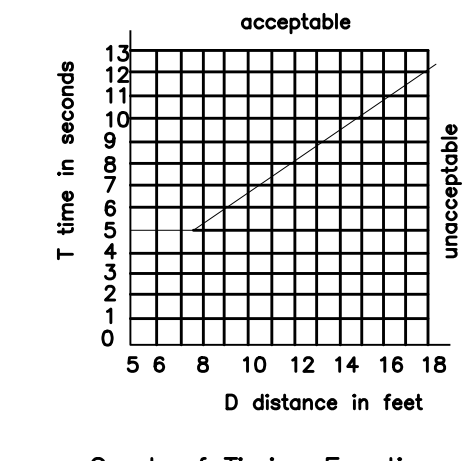


Graph of Timing Equation

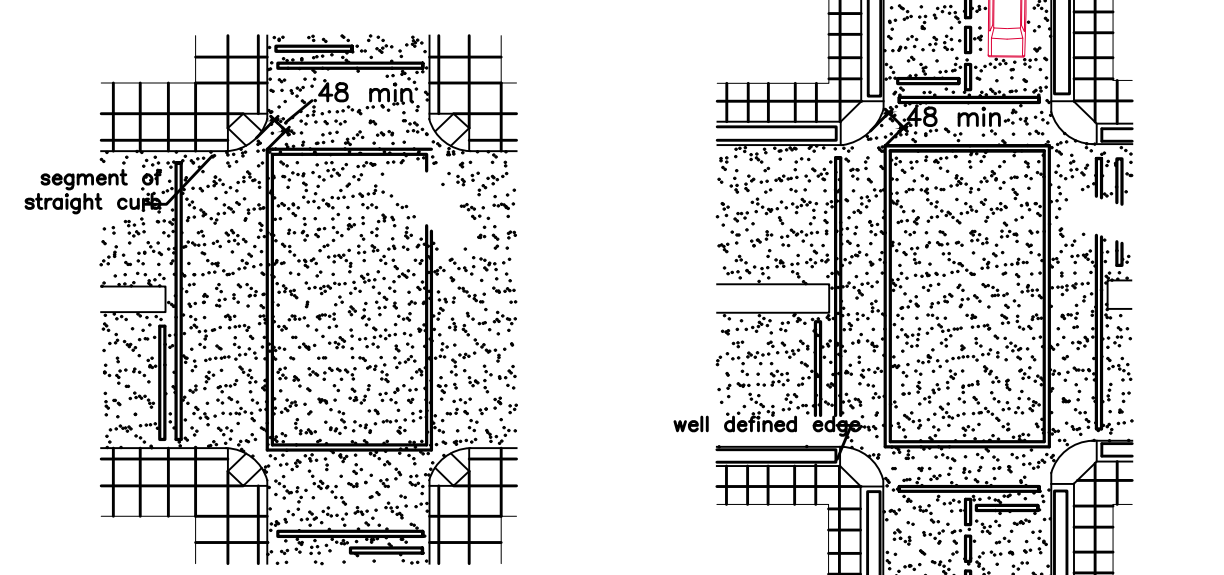


segment of straight curb

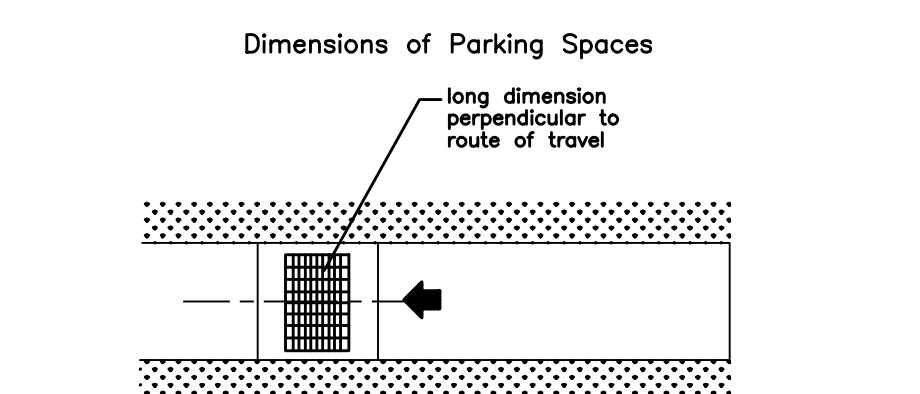


Dimensions of Parking Spaces

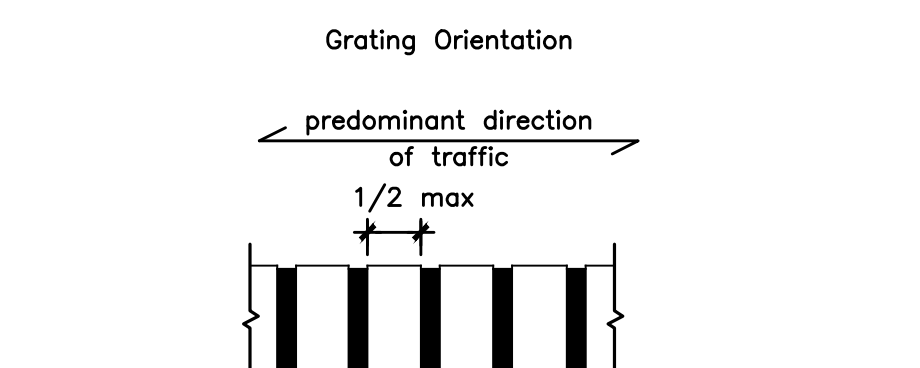


Grating Orientation

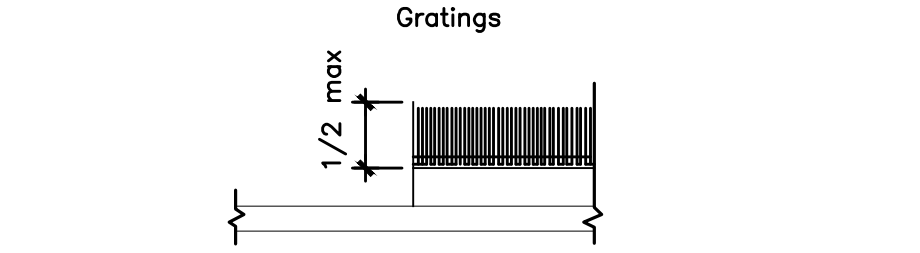


Gratings

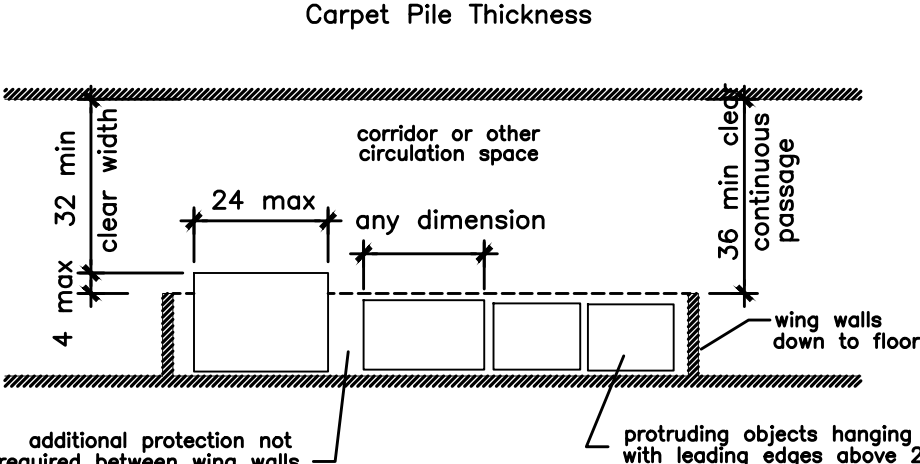


Carpet Pile Thickness

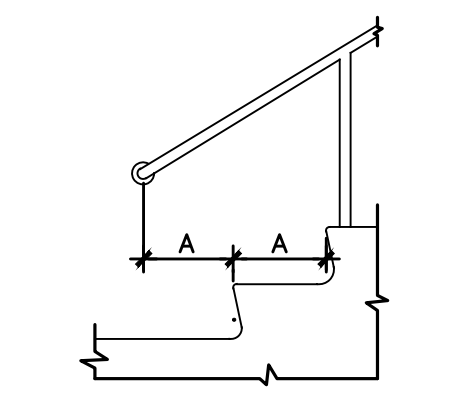

Extension at Bottom of Run

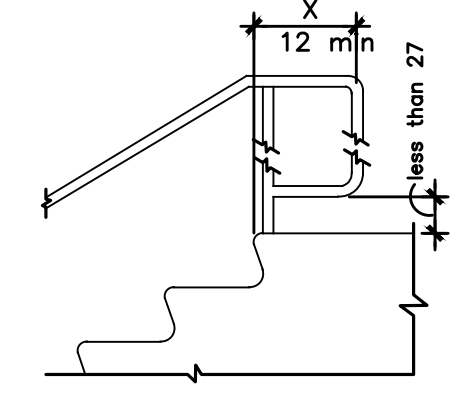


Extension at Top of Run

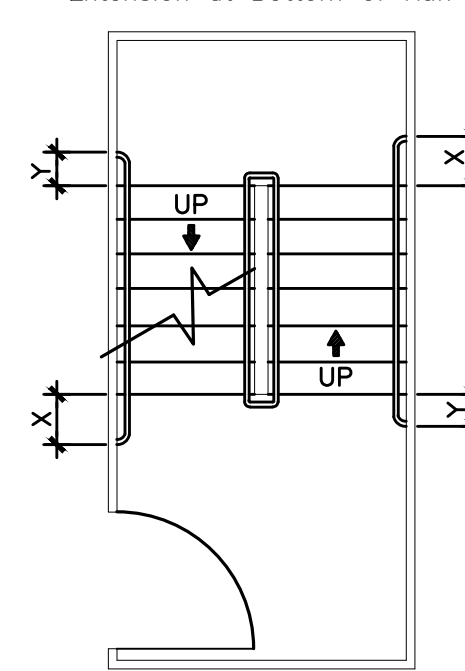


Plan

NOTE: X is the 12 in minimum handrail extension required at each top riser. Y is the minimum handrail extension of one tread depth beyond the last riser nosing.

Elevation of Center Handrail

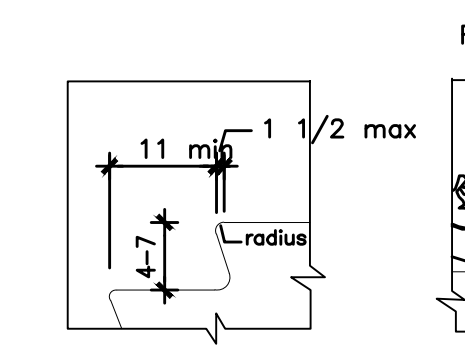


Flush Riser

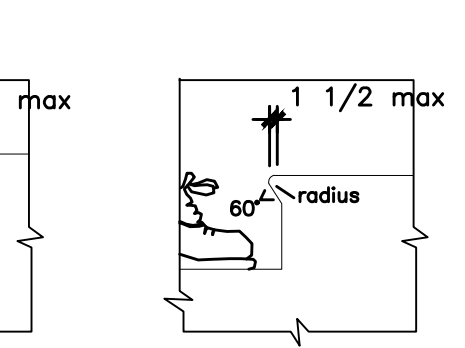


Angled Nosing

Usable Tread Width and Examples of Acceptable Nosings

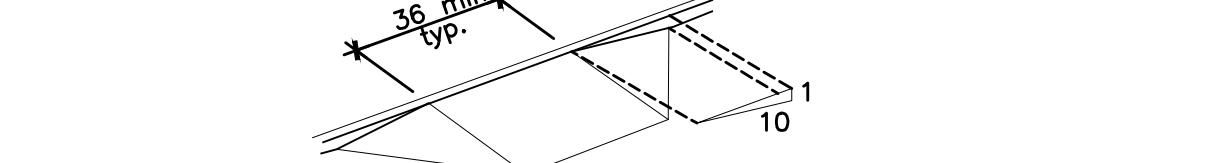


Curb Ramp at Marked Crossings

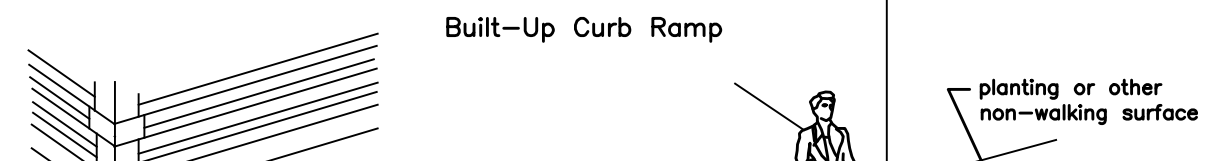


Built-Up Curb Ramp




Flared Sides

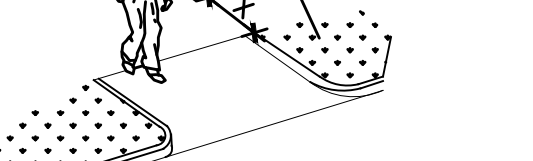


Returned Curbs

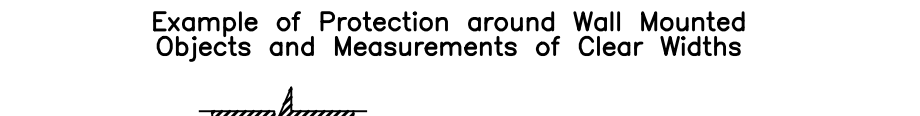


Example of Protection around Wall Mounted Objects and Measurements of Clear Widths

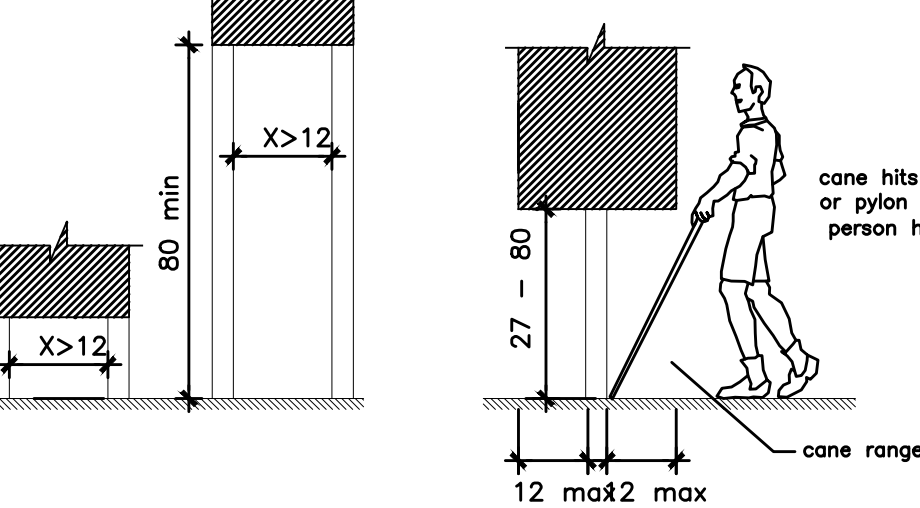


Objects Mounted on Posts and Pylons

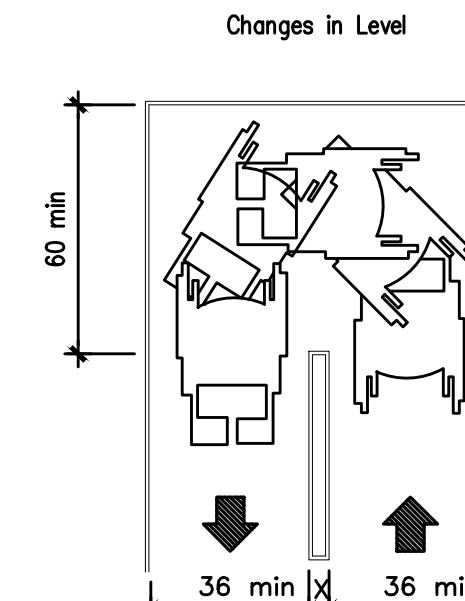


Changes in Level

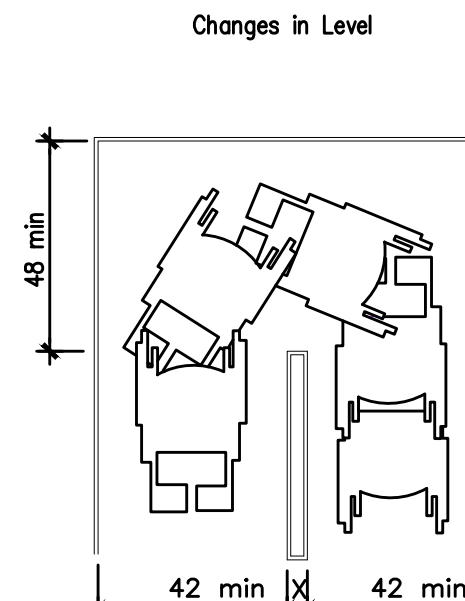


Changes in Level

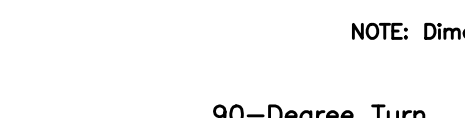


90-Degree Turn

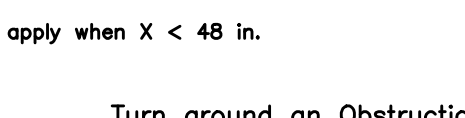


Turn around an Obstruction

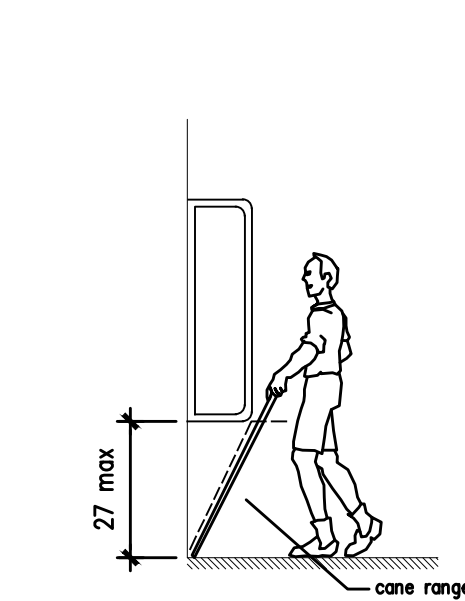


Accessible Route

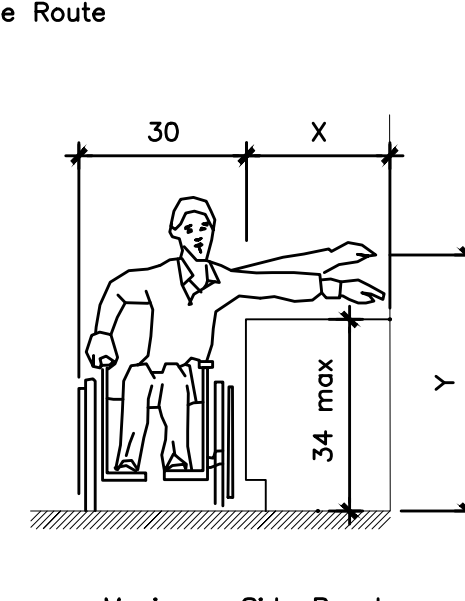


Maximum Side Reach over Obstruction

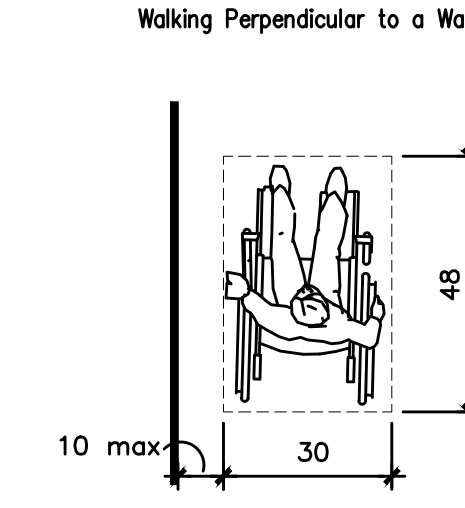


Clear Floor Space Parallel Approach

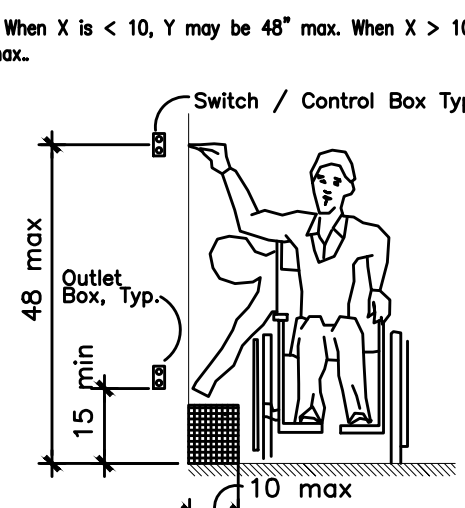


High and Low Side Reach Limits

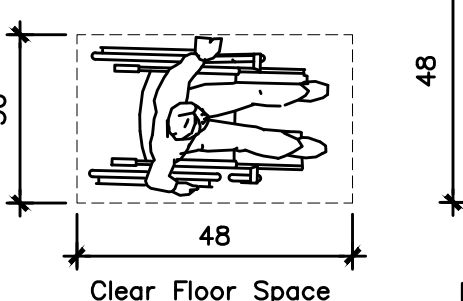


Clear Floor Space

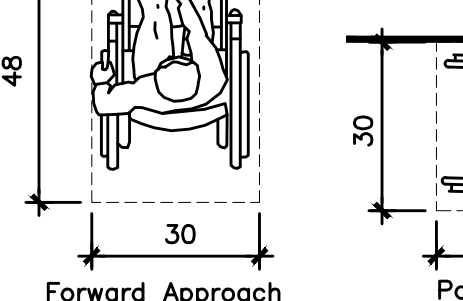


Forward Approach Minimum Clear Floor Space for Wheelchairs

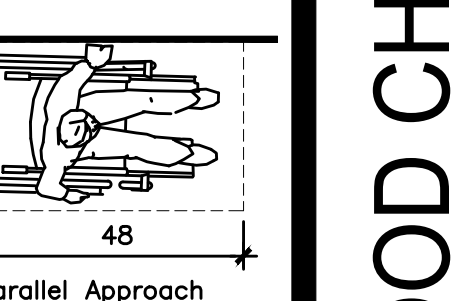


Parallel Approach

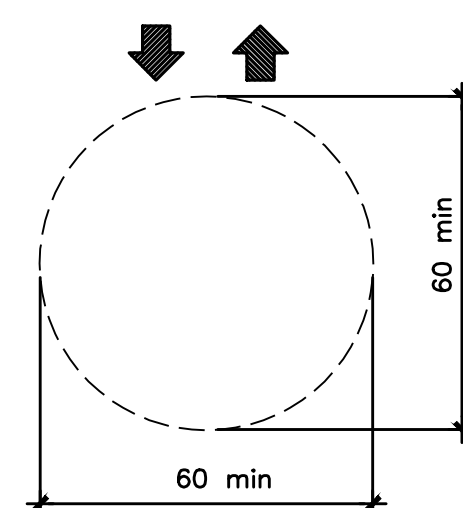


60-in Diameter Space

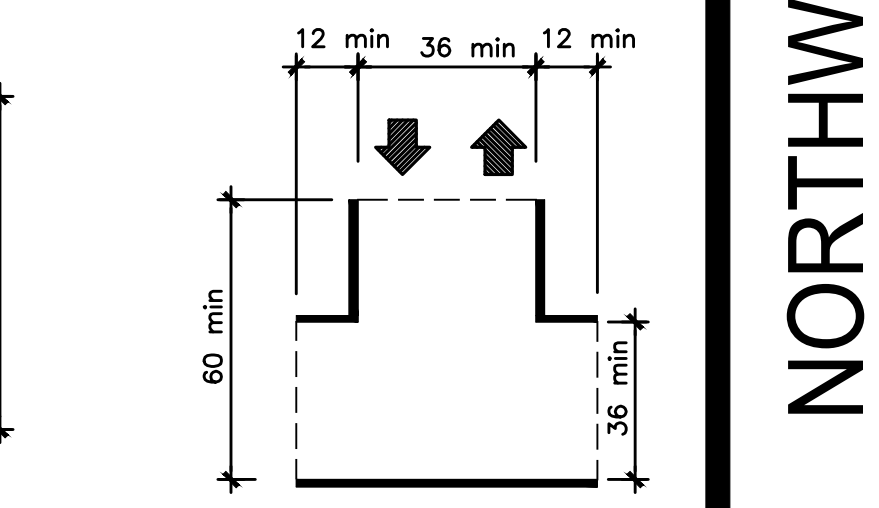

T-Shaped Space for 180-Degree Turns

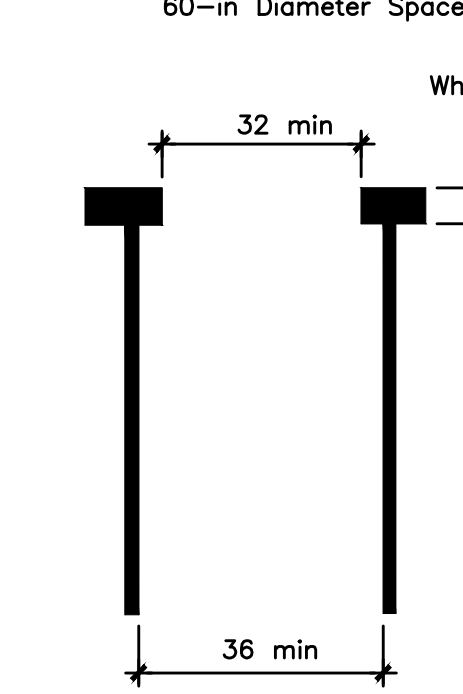

Wheelchair Turning Space

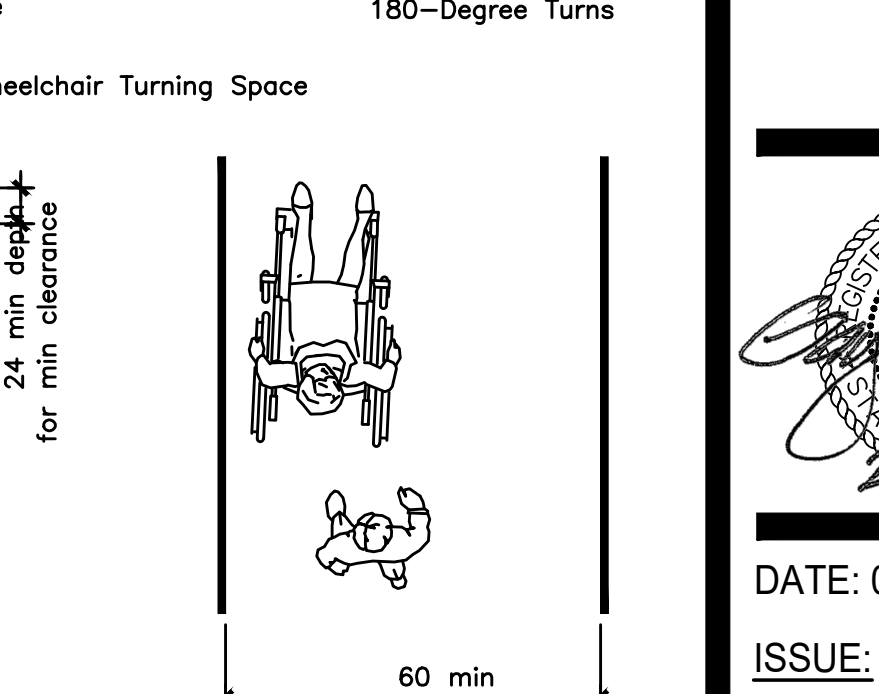

Minimum Clear Width for Single Wheelchair


Minimum Clear Width for Two Wheelchairs


GENERAL NOTE

THIS DATA IS PROVIDED AS AN ADDITIONAL RESOURCE TO THE TEAM OF OWNER, CLIENT, ARCHITECT, ENGINEER, AND SPECIFICALLY CONTRACTOR. THIS IS A REFERENCE TOOL PROVIDED TO INFORM ALL PARTIES OF TYPICAL ACCESSIBLE CONDITIONS AS PUBLISHED PER ADAAG (AMERICANS WITH DISABILITIES ACT, ACCESSIBILITY GUIDELINES) EFFECTIVE SEPTEMBER 15, 2010. THE DIAGRAMS PROVIDED ARE DUPLICATIONS OF THE ADAAG STANDARDS AND ARE NOT INDICATIVE OF ALL CONDITIONS AND DO NOT REPRESENT THE ENTIRETY OF THE WRITTEN GUIDELINES AS CONTAINED IN THE PUBLISHED STANDARDS. THIS DATA IS IN SUPPORT OF GENERAL ARCHITECTURAL & ENGINEERING DOCUMENTATION, WHILE THE INFORMATION PROVIDED IN SHEETS G2.01 AND G2.02 ENDEAVOR TO REPRESENT TYPICAL CONDITIONS, IN THE EVENT OF A CONFLICT, THE PUBLISHED STANDARDS AND TECHNICAL MEMORANDA SHALL GOVERN.

FOR QUESTIONS REGARDING ADA ACCESSIBILITY GUIDELINES CONTACT:

UNITED STATES DEPARTMENT OF JUSTICE
CIVIL RIGHTS DIVISION
950 PENNSYLVANIA AVENUE, N.W.
DISABILITY RIGHTS SECTION - NYAV
WASHINGTON, D.C. 20530
http://www.ada.gov

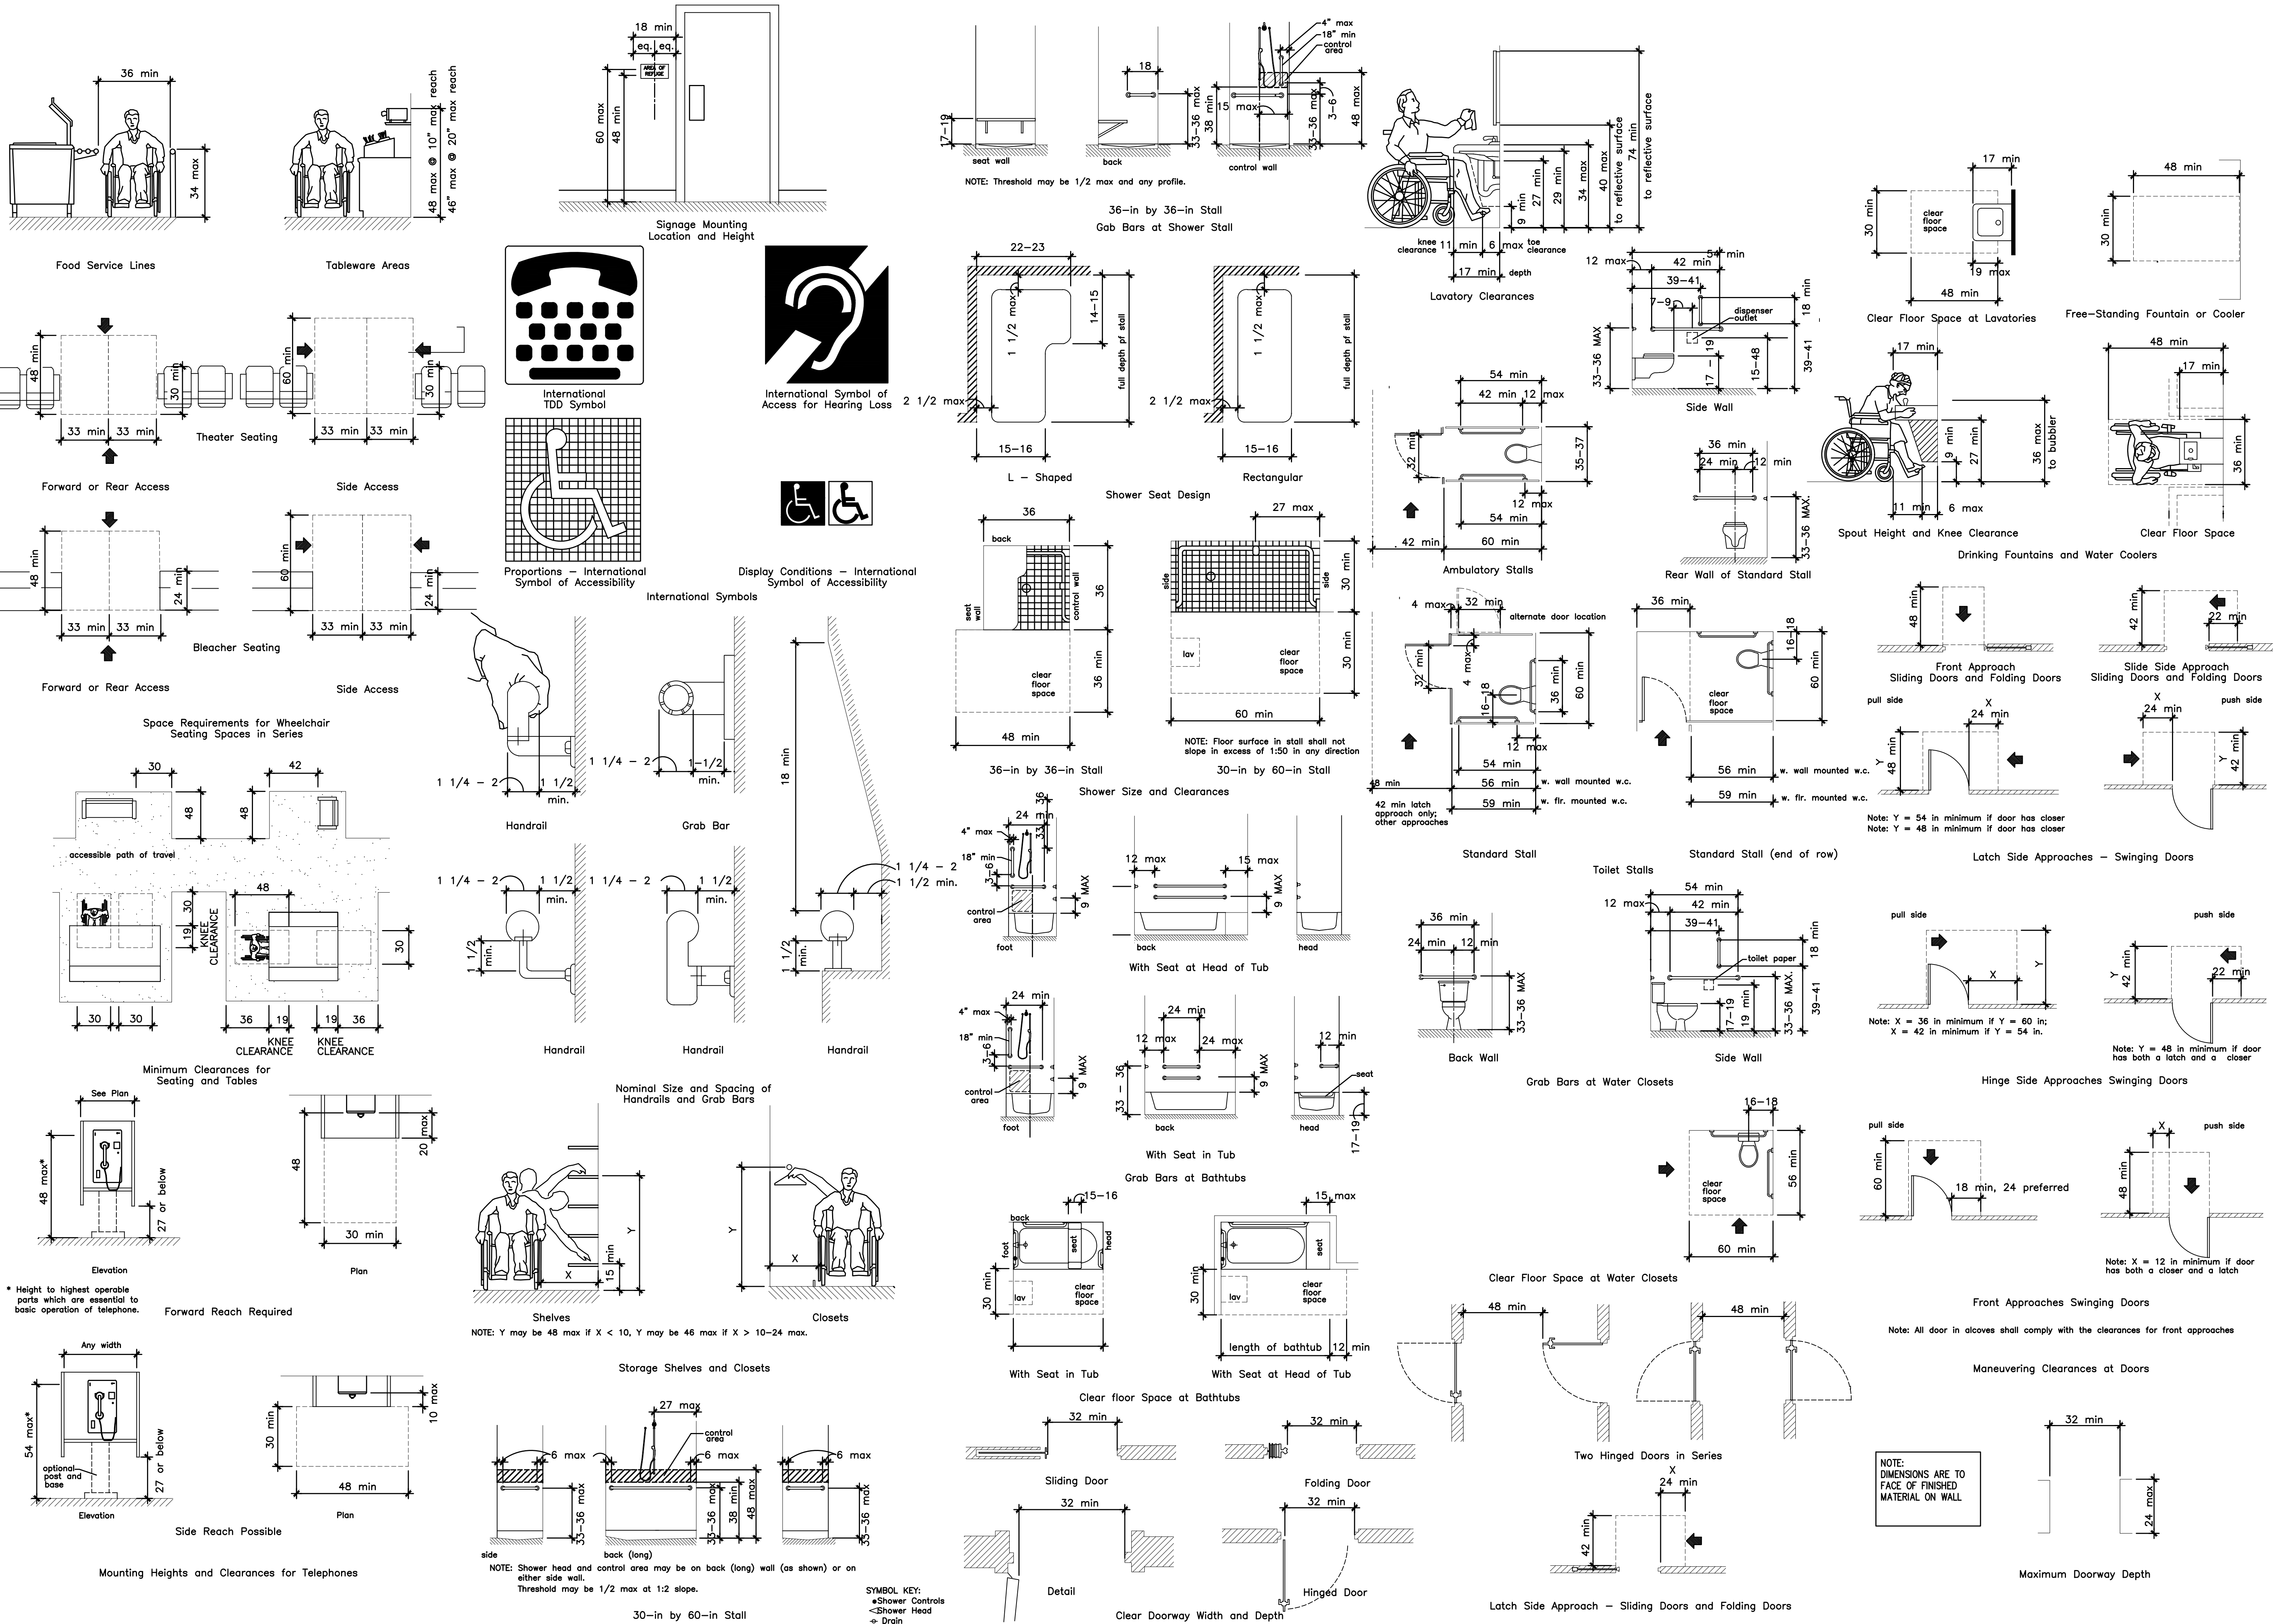

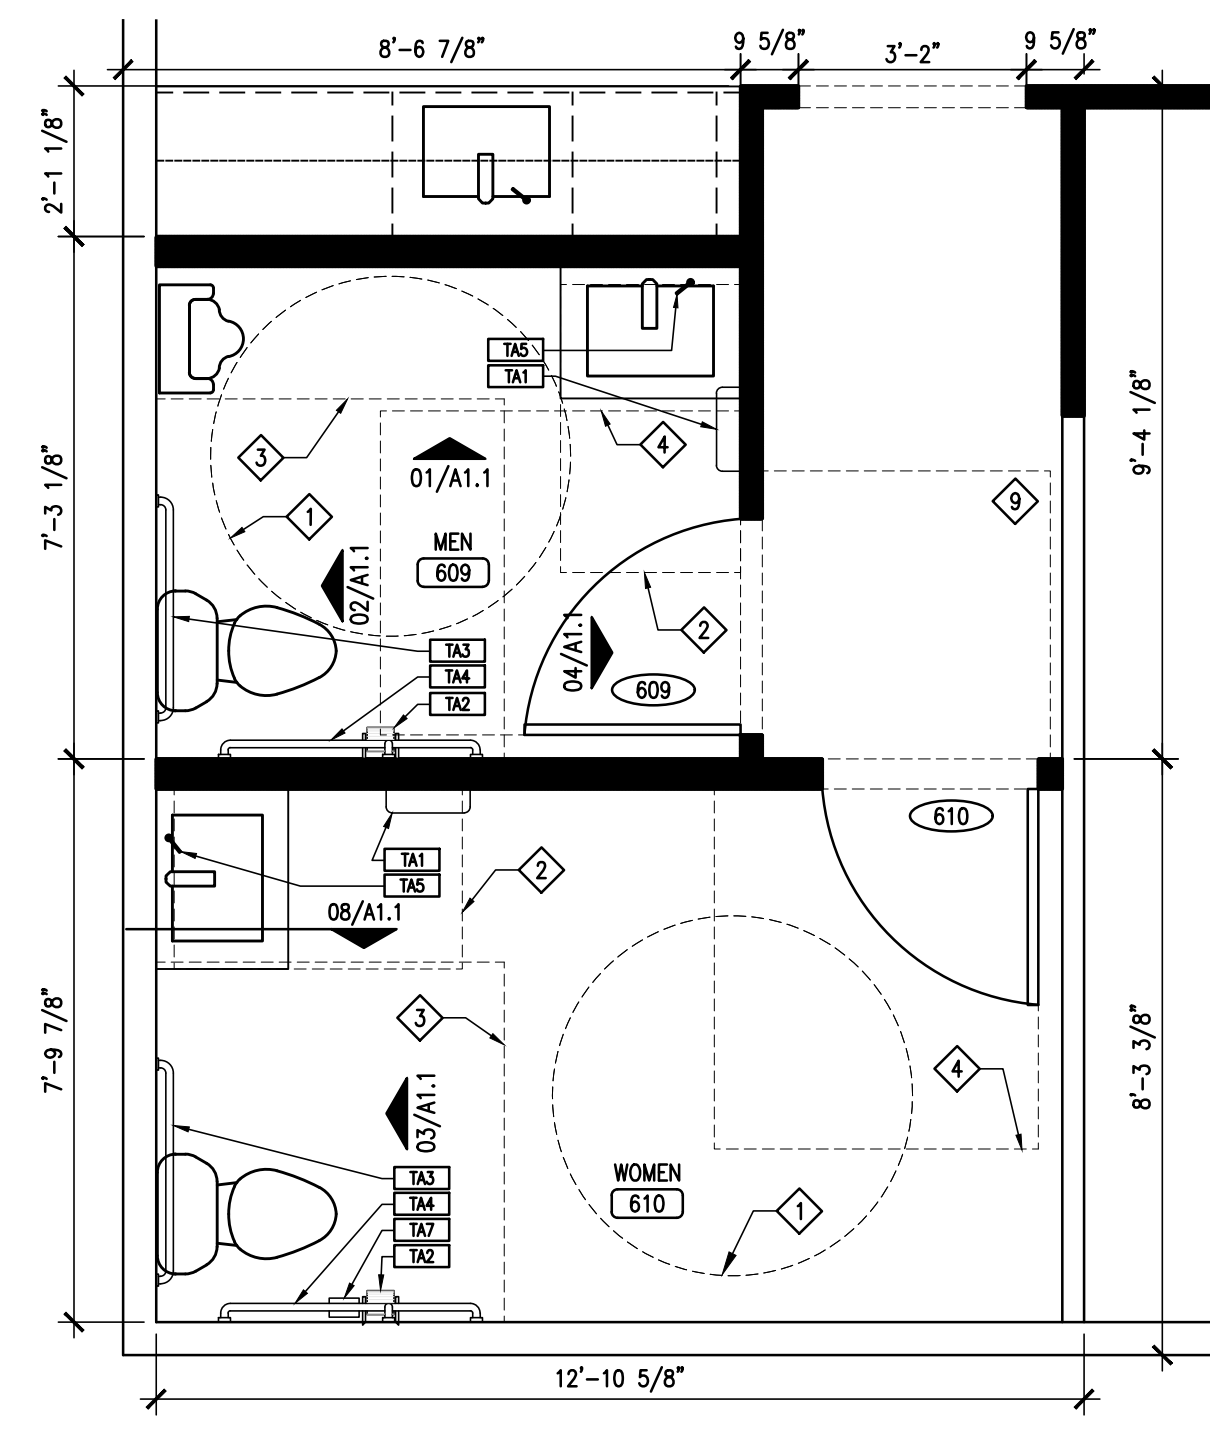

05 ENLARGED RESTROOM PLAN
A1.0 SCALE: 3/8"=1'-0"

P1 ROOM FINISH SCHEDULE				
ROOM NO.	ROOM NAME	FLOOR	BASE	WALLS
601	MISSION	LVP	VB	P
602	CONFERENCE	CPT	VB	P
603	OFFICE	CPT	VB	P
604	OFFICE	CPT	VB	P
605	OFFICE	CPT	VB	P
606	OFFICE	CPT	VB	P
607	OFFICE	CPT	VB	P
608	OFFICE	CPT	VB	P
609	MEN'S	LVP	VB	EPX
610	WOMEN'S	LVP	VB	EPX
611	STORAGE	LVP	VB	P

P1 DOOR SCHEDULE				
NO.	TYPE	SIZE	MATL	FRAME
601A	2	(2)3'-0" X 7'-0"	ALUM	B
601B	1	3'-0" X 7'-0"	STL	A
602	3	(2)3'-0" X 7'-0"	WD	E
603	4	3'-0" X 7'-0"	WD	A
604	4	3'-0" X 7'-0"	WD	A
605	4	3'-0" X 7'-0"	WD	A
606	4	3'-0" X 7'-0"	WD	A
607	4	3'-0" X 7'-0"	WD	A
608	EXIST	3'-0" X 7'-0"	TO BE REUSED	
609	EXIST	3'-0" X 7'-0"	TO BE REUSED	
610	EXIST	3'-0" X 7'-0"	TO BE REUSED	
611	EXIST	3'-0" X 7'-0"	TO BE REUSED	

FLOORING:
CPT CARPET TILE
LVP LUXURY VINYL PLANK
ETR EXISTING TO REMAIN
PT PORCELAIN TILE
SC SEALED CONCRETE

WALLS:
P PAINT AND TEXTURE ON GYP. BD.
CT PORCELAIN TILE
EPX EPOXY PAINT COATING

BASE:
VB VINYL BASE

CEILING:
P PAINT AND TEXTURE ON GYP. BD.
ACT LAY-IN ACOUSTICAL TILE

GENERAL NOTES:
1. REFER TO INTERIOR ELEVATIONS FOR ADDITIONAL INFO.
2. BASE IN BATHROOMS SHALL BE 4" TALL.

TOILET ACCESSORIES	
TA1	ENMOTION PAPER TOWEL DISPENSER - WALL MOUNTED
TA2	TOILET TISSUE DISPENSER - DOUBLE ROLL
TA3	36" GRAB BAR
TA4	42" GRAB BAR
TA5	AUTOMATIC SOAP DISPENSER - DECK MOUNTED
TA6	SANITARY NAPKIN DISPOSAL UNIT
TA7	24" X 36" WALL MOUNTED MIRROR
TA8	SOAP DISPENSER - WALL MOUNTED
TA9	UNFRAMED MIRROR

SPECIFIC ACCESSORIES LISTED IN SECTION 10 28 13

CLEAR FLOOR SPACE	
1	80" TURNING DIAMETER
2	30" X 48" CLEAR FLOOR SPACE
3	80" X 56" CLEAR FLOOR SPACE
4	48" X 60" CLEAR FLOOR SPACE
5	36" X 48" CLEAR FLOOR SPACE
6	36" X 60" CLEAR FLOOR SPACE
7	42" X 58" CLEAR FLOOR SPACE
8	54" X 60" CLEAR FLOOR SPACE
9	48" X 48" CLEAR FLOOR SPACE
10	58" X 42" CLEAR FLOOR SPACE

- GENERAL FLOOR PLAN NOTES**
- REFER TO MEP DRAWINGS FOR MORE INFORMATION.
 - ALL DIMENSIONS ARE TO FACE OF STUD OR TO FACE OF MASONRY UNLESS NOTED OTHERWISE. MASONRY DIMENSIONS ARE NOMINAL UNLESS NOTED OTHERWISE.
 - CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND INFORM THE OWNER AND ARCHITECT OF ANY CONFLICT PRIOR TO THE COMMENCEMENT OF WORK.
 - PROVIDE WOOD BLOCKING FOR ALL ITEMS OR EQUIPMENT FASTENING INTO DRYWALL PARTITIONS, TYPICAL. FOR TV LOCATIONS, PROVIDE 12" HIGH X 16" WIDE BLOCKING W/ CENTER AT 60" A.F.F. FOR BEDSIDE TV'S PROVIDE BLOCKING AS RECOMMENDED BY MANUFACTURER.
 - ALL PUBLIC USE DOORS SHALL HAVE HC ACCESSIBLE CLEAR FLOOR SPACE. NOTIFY ARCHITECT OF ANY CONFLICT TO COMPLIANCE.
 - REFER TO SHEET G2.1 & G2.2 FOR ACCESSIBILITY REQUIREMENT INCLUDING CLEAR FLOOR SPACE, MOUNTING HEIGHTS, CABINET CLEARANCES, ETC., THAT MUST BE MAINTAINED.
 - SEAL ALL PENETRATIONS IN RATED ASSEMBLIES TO MAINTAIN THE REQUIRED RATING.
 - WHERE WALLS AND PARTITIONS ARE REQUIRED TO HAVE A 1 HOUR FIRE RATED ASSEMBLY, STEEL ELECTRICAL BOXES ON OPPOSITE SIDES OF THE WALL SHALL BE SEPARATED BY THE FOLLOWING:
 - BY HORIZONTAL DISTANCE OF NOT LESS THAN 24 INCHES.
 - BY SOLID FIRE BLOCKING IN ACCORDANCE WITH SECTION 717.2.1 OF 2018 INTERNATIONAL BUILDING CODE, WHICH STATES THAT FIRE BLOCKING MATERIALS SHALL CONSIST OF 2-INCH NOMINAL LUMBER.
 - BY PROTECTING BOTH OUTLET BOXES WITH LISTED PUTTY PADS.
 - WHERE OCCUPIED SPACES ARE OPEN TO DECK, EXPOSED STRUCTURE, PIPE, DUCTWORK, AND DRYWALL SHALL BE PREPARED FOR PAINT.
 - FLOORING TRANSITIONS BETWEEN ROOMS SHALL OCCUR BENEATH DOORS IN THE CLOSED POSITIONS, TYP.

- GENERAL RCP NOTES**
- ALL 1 HOUR PARTITION WALLS SHALL TERMINATE TO THE BOTTOM OF THE 1-HOUR ROOF/CEILING ASSEMBLY.
 - ALL PENETRATIONS THROUGH RATED WALLS SHALL BE FIRE-STOPPED AS REQUIRED TO MAINTAIN WALL RATING.
 - COORDINATE LIGHT FIXTURE LOCATIONS WITH DOORS, MECHANICAL EQUIPMENT AND FIRE SPRINKLERS. NOTIFY THE ARCHITECT IF THERE IS A DISCREPANCY.
 - RELOCATE EXISTING HVAC AIR DEVICES AS REQUIRED. EXTEND OR OTHERWISE MODIFY DUCTWORK TO MAINTAIN PROPER PERFORMANCE OF THE SYSTEM.
 - RELOCATE FIRE SUPPRESSION SPRINKLER HEADS AS REQUIRED. EXTEND OR MODIFY PIPING AS REQUIRED TO RESULT IN A CODE COMPLIANT SYSTEM. THE SPRINKLER CONTRACTOR SHALL PROVIDE ENGINEERED DESIGN AND SUBMIT TO THE CITY FOR APPROVAL.

RCP LEGEND	
[Symbol]	2x4 LAY-IN TROFFER LED LIGHT FIXTURE
[Symbol]	2x2 LAY-IN TROFFER LED LIGHT FIXTURE
[Symbol]	SURFACE MOUNT LED LIGHT FIXTURE
[Symbol]	WALL PACK
[Symbol]	SCONCE WALL MOUNT FIXTURE
[Symbol]	PENDANT WALL MOUNT FIXTURE
[Symbol]	LED COVE STRIP LIGHT
[Symbol]	WALL MOUNTED LIGHT FIXTURE
[Symbol]	PENDANT LIGHT/ CHANDELIER
[Symbol]	RECESSED DOWNLIGHT FIXTURE
[Symbol]	EXIT LIGHT
[Symbol]	SUSPENDED CEILING
[Symbol]	AREA NOT AFFECTED DURING THIS PHASE

- FLOOR PLAN NOTES BY NUMBER**
- NEW METAL FRAMED WALL. SEE WALL SECTIONS FOR ADDITIONAL INFORMATION.
 - NEW ALUMINUM FRAME AND GLASS PARTITION WALLS
 - NEW EXTERIOR INFILL WALL TO MATCH EXISTING..
 - RELOCATE EXISTING STOREFRONT DOOR & WINDOW UNITS.
 - EXTEND NEW & EXISTING WALLS FULL HEIGHT TO DECK.
 - REMOVE DOOR AND FRAME AND RE-INSTALL IN NEW WALL CONFIGURATION.
 - BABY TOILET BOWLS TO BE REUSED/ADDED TO TOILET ROOMS 309, 310, 311, & 312.

AREA PER PHASE	
PHASE 1	2,290 SQ. FT.


WINDOW SCHEDULE			
WINDOW	SIZE	HEAD HEIGHT	MATL
A	3'-4" X 7'-2"	7'-2"	HM
B	2'-3 1/2" X 6'-4 1/4"	6'-4 1/4"	

- RCP NOTES BY NUMBER (#)**
- 2x2 A.C.T. SUSPENDED CEILING W/ 6" R-19 FIBERGLASS INSULATION OVER.
 - NEW 1-HR FIRE RATED GYPSUM BOARD CEILING, GA FILE NO. RC-2601. RE: RCP AND DETAILS.
 - EXISTING CEILING AND LIGHTING TO REMAIN.
 - REPLACE FABRIC ON EXISTING METAL AWNING STRUCTURE.
 - LIGHT COVE WITH LED COVE STRIP LIGHT.
 - CEILING OPEN TO DECK.
 - PENDANT LIGHTING SUSPENDED FROM ROOF STRUCTURE.
 - DECORATIVE RECESSED WOOD RAFTERS/BEAMS.
 - SUSPENDED LINEAR LIGHT FIXTURE.
 - EXISTING LIGHTING FIXTURE TO REMAIN.


- GENERAL DEMOLITION NOTES**
- REMOVE BUILDING ELEMENTS AS INDICATED AND TO THE EXTENT NECESSARY TO ACCOMPLISH THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. ELECTRICAL AND PLUMBING FIXTURES AND DEVICES REMOVED DURING DEMOLITION SHALL INCLUDE THE REMOVAL OF ALL ASSOCIATED WIRES, CONDUIT, AND LINES IN THEIR ENTIRETY BACK TO THE SOURCE OR TO UNDER A POINT OUT OF CONFLICT WITH THE NEW WORK AND OUT OF SIGHT.
 - ALL MATERIALS, FIXTURES, ETC. INDICATED TO BE REMOVED SHALL BE DISPOSED OF PROPERLY OFF SITE BY THE CONTRACTOR UNLESS NOTED OTHERWISE.
 - REMOVE BUILDING ELEMENTS IN SUCH A MANNER TO FACILITATE THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. PREPARE ALL SURFACES TO RECEIVE NEW FINISH AS SCHEDULED.
 - CONTRACTOR TO DETERMINE LOAD BEARING WALLS PRIOR TO DEMOLITION. RESHORE AS NECESSARY DURING ALL PHASES OF WORK.
 - COORDINATE WITH FACILITIES MANAGEMENT FOR REMOVAL, STORAGE, AND RELOCATION OF FACILITY FURNITURE, FIXTURES, AND EQUIPMENT DURING CONSTRUCTION.
 - PROTECT EXISTING CONSTRUCTION TO REMAIN FROM DEMOLITION PROCESS INCLUDING DUST AND DAMAGE CAUSED BY FOOT TRAFFIC.
 - PATCH AND REPAIR ALL EXISTING WALLS AND CEILINGS TO REMAIN WITH TEXTURE TO MATCH EXISTING. PREPARE SURFACES FOR NEW PAINT.
 - DOORS, FRAMES AND HARDWARE REMOVED DURING DEMOLITION SHALL BE SALVAGED FOR REUSE. COORDINATE WITH NEW DOOR SCHEDULE REQUIREMENTS, REFINISH EXISTING DOORS AND FRAMES REUSED.
 - LIGHT FIXTURES AND CEILING MOUNTED DEVICES AND EQUIPMENT SHALL BE REMOVED OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY. REF. REFLECTED CEILING PLAN AND MEP FOR FULL SCOPE OF NEW CONSTRUCTION.
 - MECHANICAL AIR DIFFUSER/RETURN TO BE RELOCATED OR REMOVED TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY.
 - FIRE SPRINKLERS AND ALARMS SHALL BE MODIFIED AND/OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUTS.
 - REMOVE ALL FLOORING THROUGHOUT, U.O.N. FLOORING INCLUDES CARPET, WOOD FLOORING, VCT AND SHEET VINYL. WALL BASE INCLUDES WOOD BASE, VINYL BASE AND CARPET BASE.
 - PER STATE LAW, AN ASBESTOS SURVEY MUST BE PERFORMED AND ANY MATERIAL FOUND TO BE AFFECTED BY CONSTRUCTION THAT ASBESTOS MUST BE PROPERLY ABATED.
 - ITEMS TO BE REMOVED OR DEMOLISHED SHOWN DASHED AND BOLD.

- DEMOLITION NOTES BY NUMBERS**
- REMOVE EXISTING WALL (DASHED).
 - REMOVE AND COORDINATE THE REUSE OF DOOR FRAME AND HARDWARE IN NEW LOCATION.
 - REMOVE EXISTING CABINETRY.
 - REMOVE EXISTING WINDOW.
 - REMOVE EXISTING LIGHT FIXTURE(S).
 - REMOVE EXISTING PLUMBING FIXTURE.
 - REMOVE EXISTING LAY-IN CEILING.
 - EXISTING CEILING AND LIGHTING TO REMAIN.
 - REMOVE EXISTING TOILET PARTITIONS.
 - REMOVE EXISTING CARPET AND/OR VINYL FLOORING.
 - REMOVE AND RELOCATE EXISTING PAPER TOWEL DISPENSER.
 - REMOVE AND COORDINATE THE REUSE OF 2x2 A.C.T. CEILING.
 - STRUCTURAL COLUMN, PROTECT DURING CONSTRUCTION.
 - REMOVE WALL TO CREATE OPENING FOR NEW EXTERIOR DOOR AND FRAME.
 - REMOVE BAPTISTERY.
 - REMOVE ROLLING COUNTER SHUTTER.
 - REMOVE PORTION OF CONCRETE SLAB FOR NEW PLUMBING.
 - DISMANTLE AND REMOVE PORTABLE DESK.
 - REMOVE EXISTING STEEL DOOR(S) AND FRAME.
 - EXISTING CONCRETE BASE TO BE REMOVED AND REPLACED.
 - CONDENSING UNIT TO BE REMOVED AND RELOCATED.
 - REMOVE AND COORDINATE THE REUSE OF BABY TOILET BOWLS.


DEMOLITION LEGEND	
[Symbol]	EXISTING TO REMAIN
[Symbol]	TO BE DEMOLISHED/ REMOVED
[Symbol]	NO DEMOLITION SCOPE WITHIN THIS AREA IN THIS PHASE

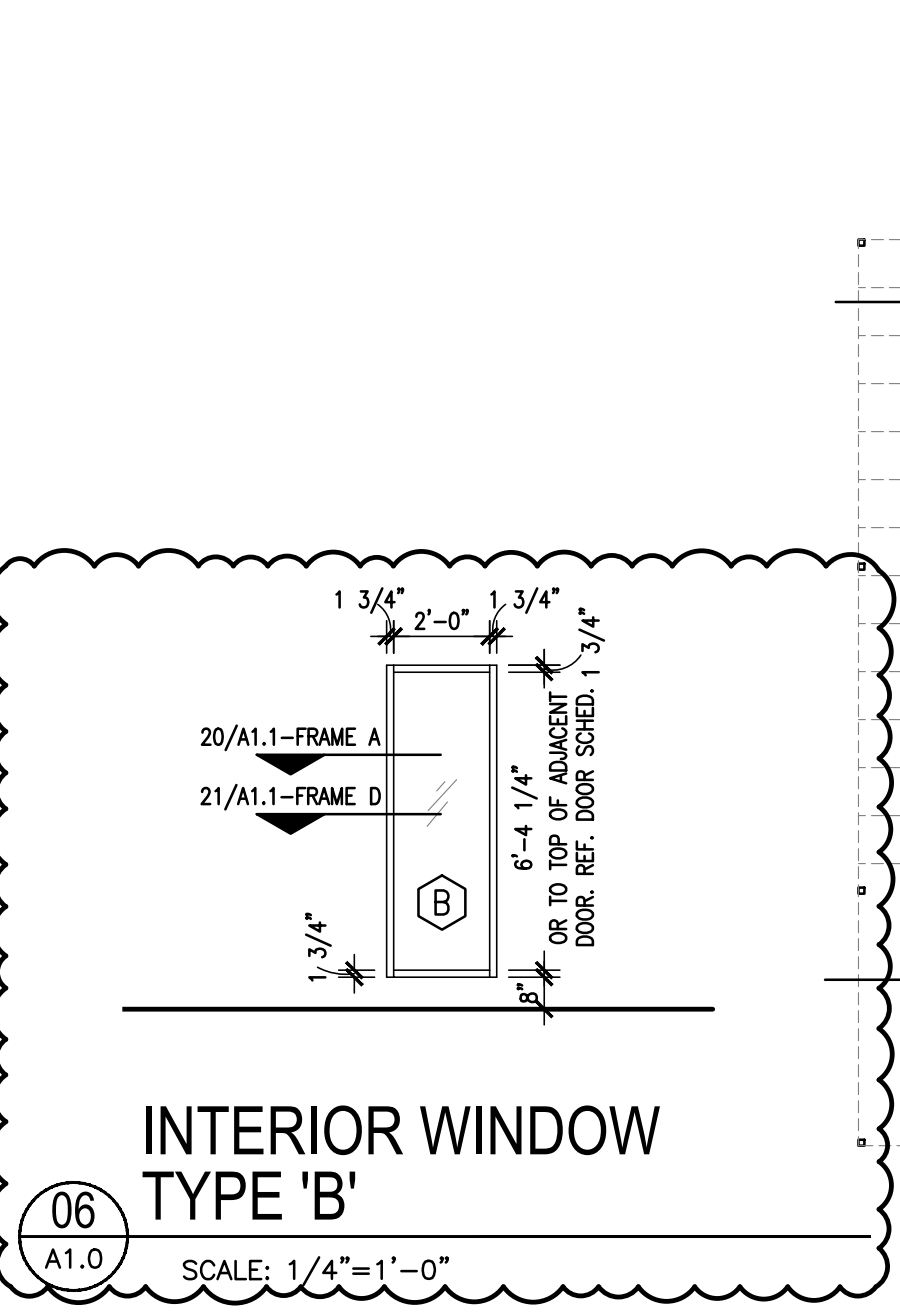


06 INTERIOR WINDOW TYPE 'B'
A1.0 SCALE: 1/4"=1'-0"

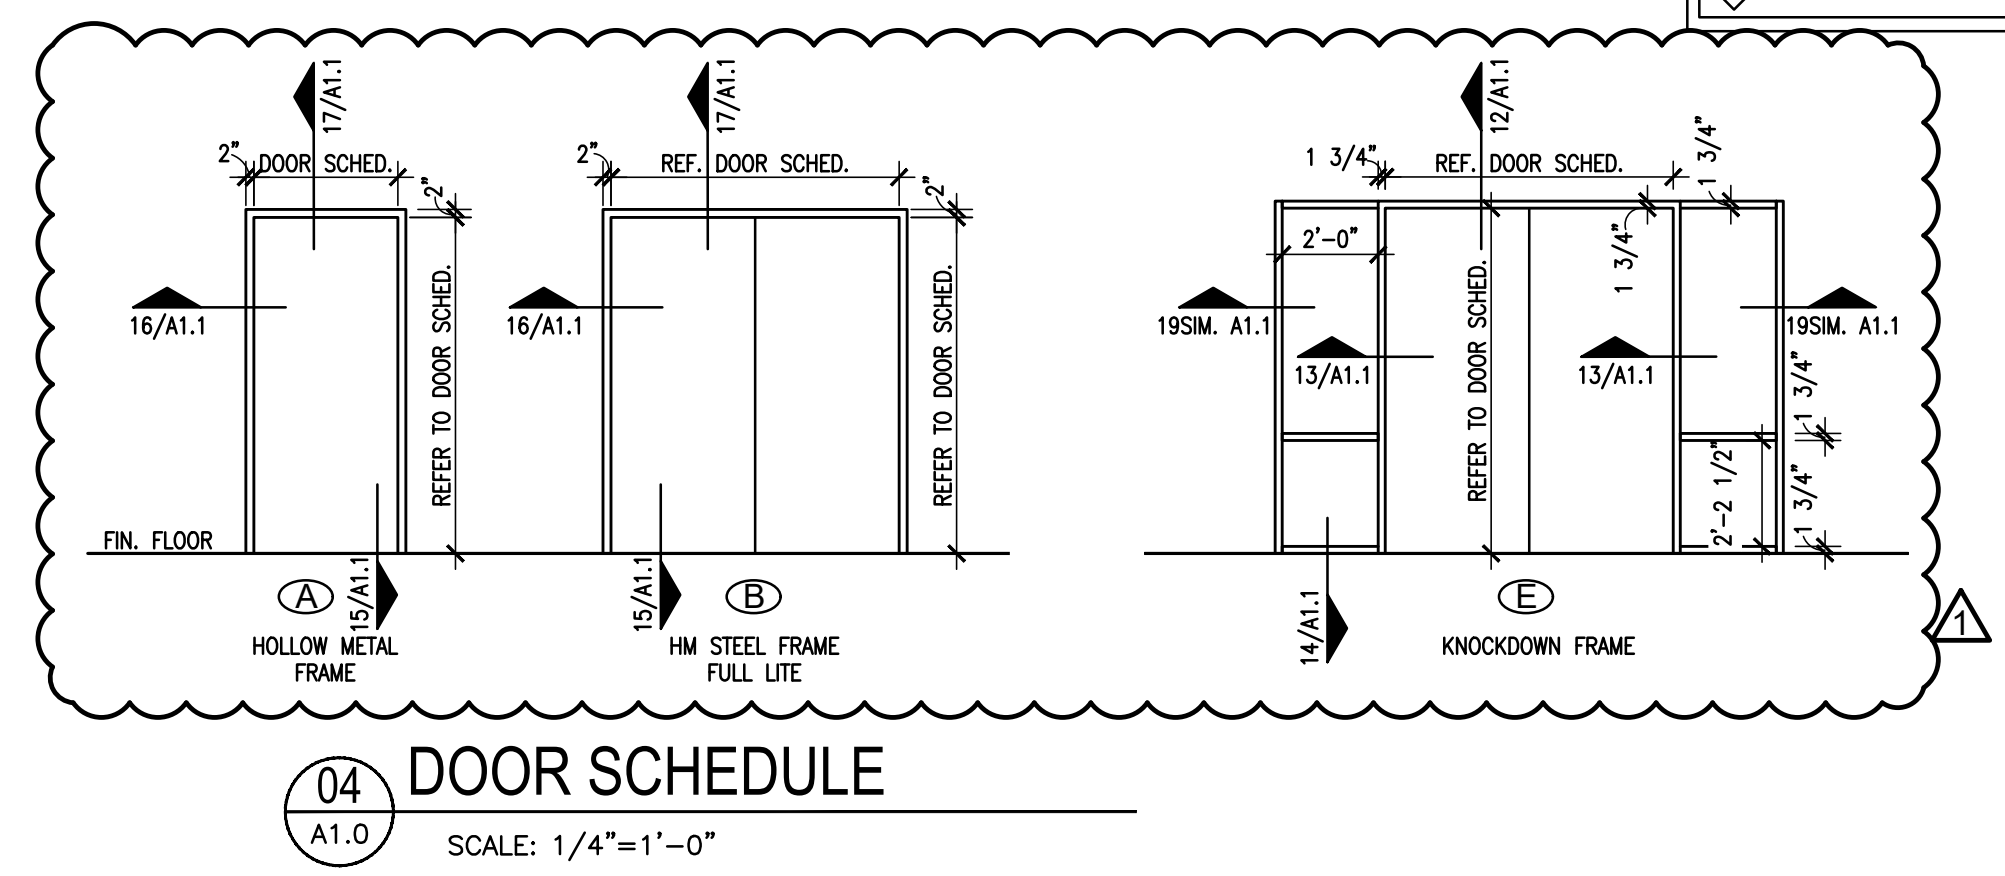


04 DOOR SCHEDULE
A1.0 SCALE: 1/4"=1'-0"

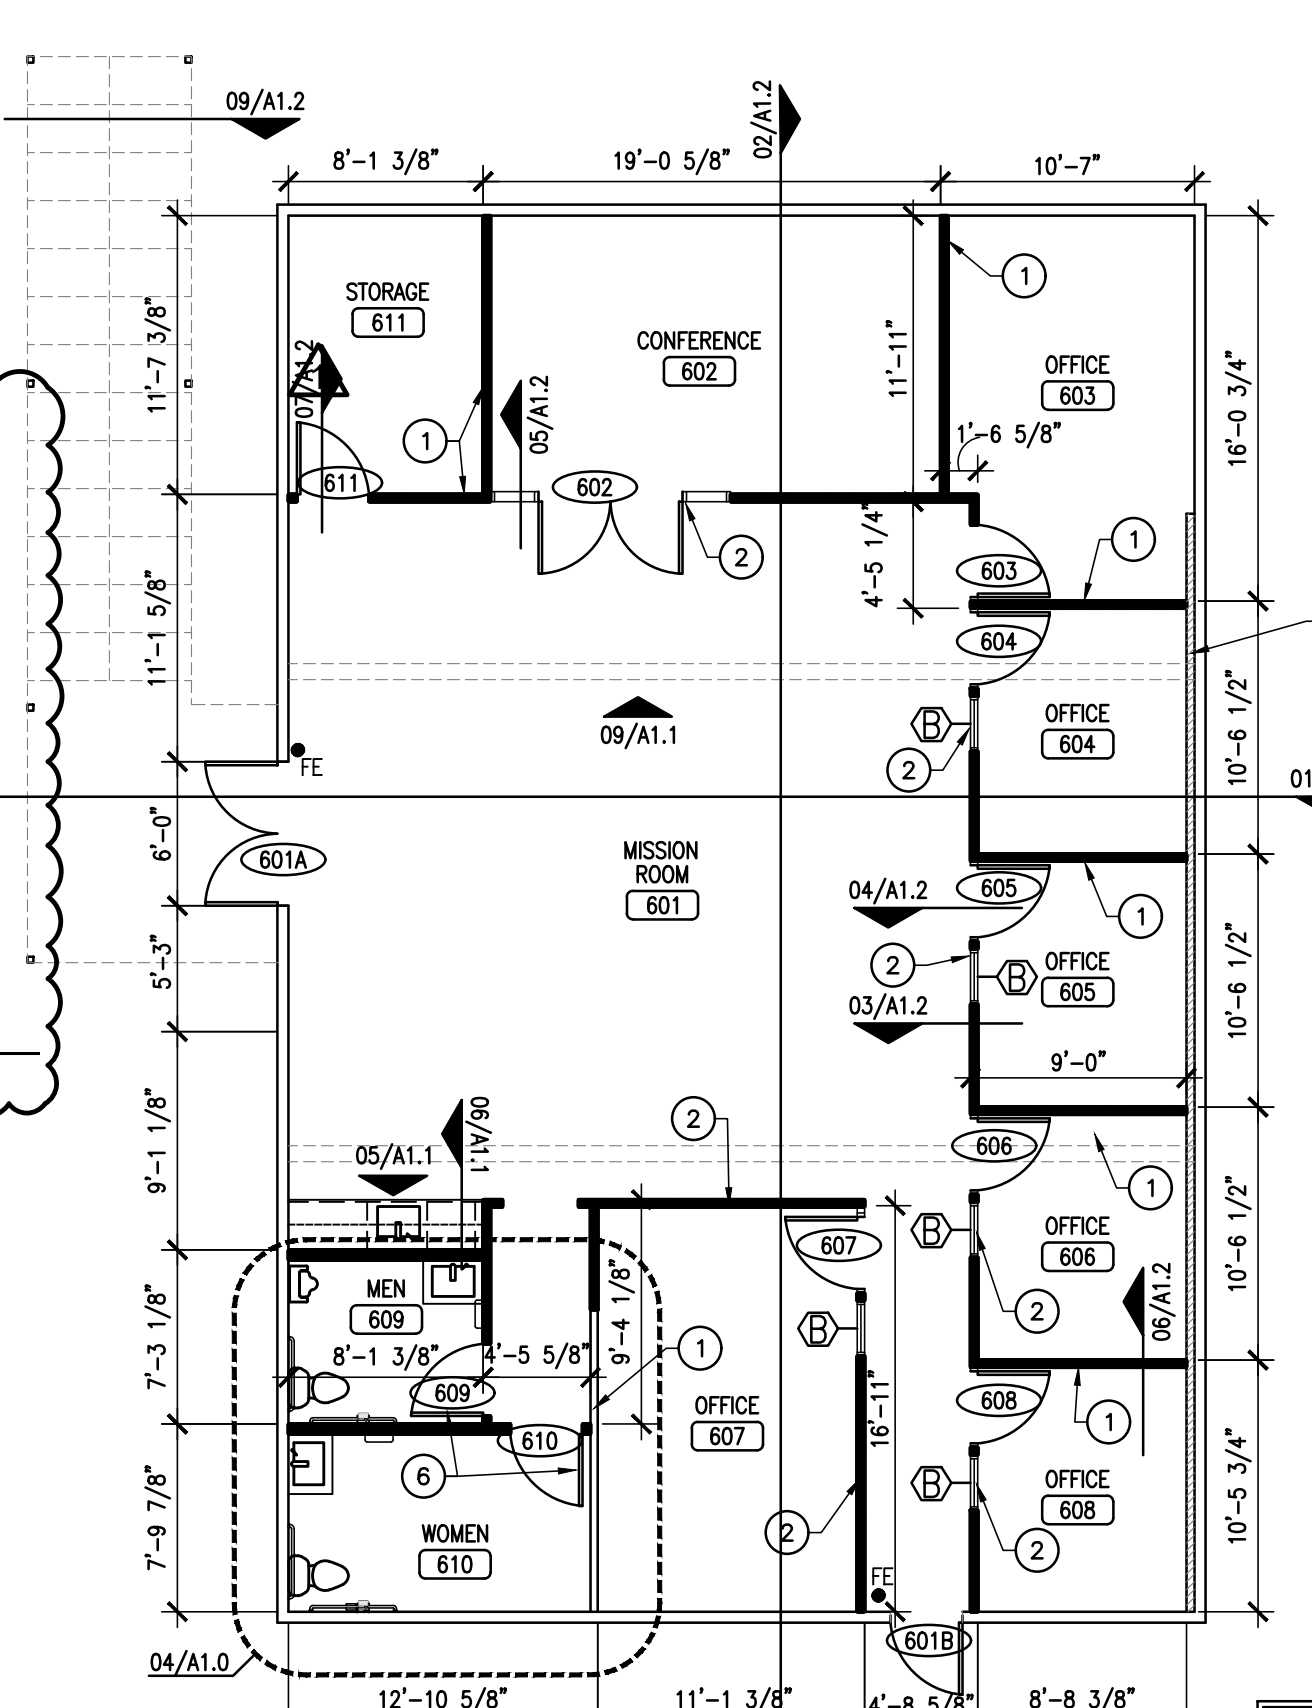

03 PHASE 1 FLOOR PLAN
A1.0 SCALE: 1/8"=1'-0"

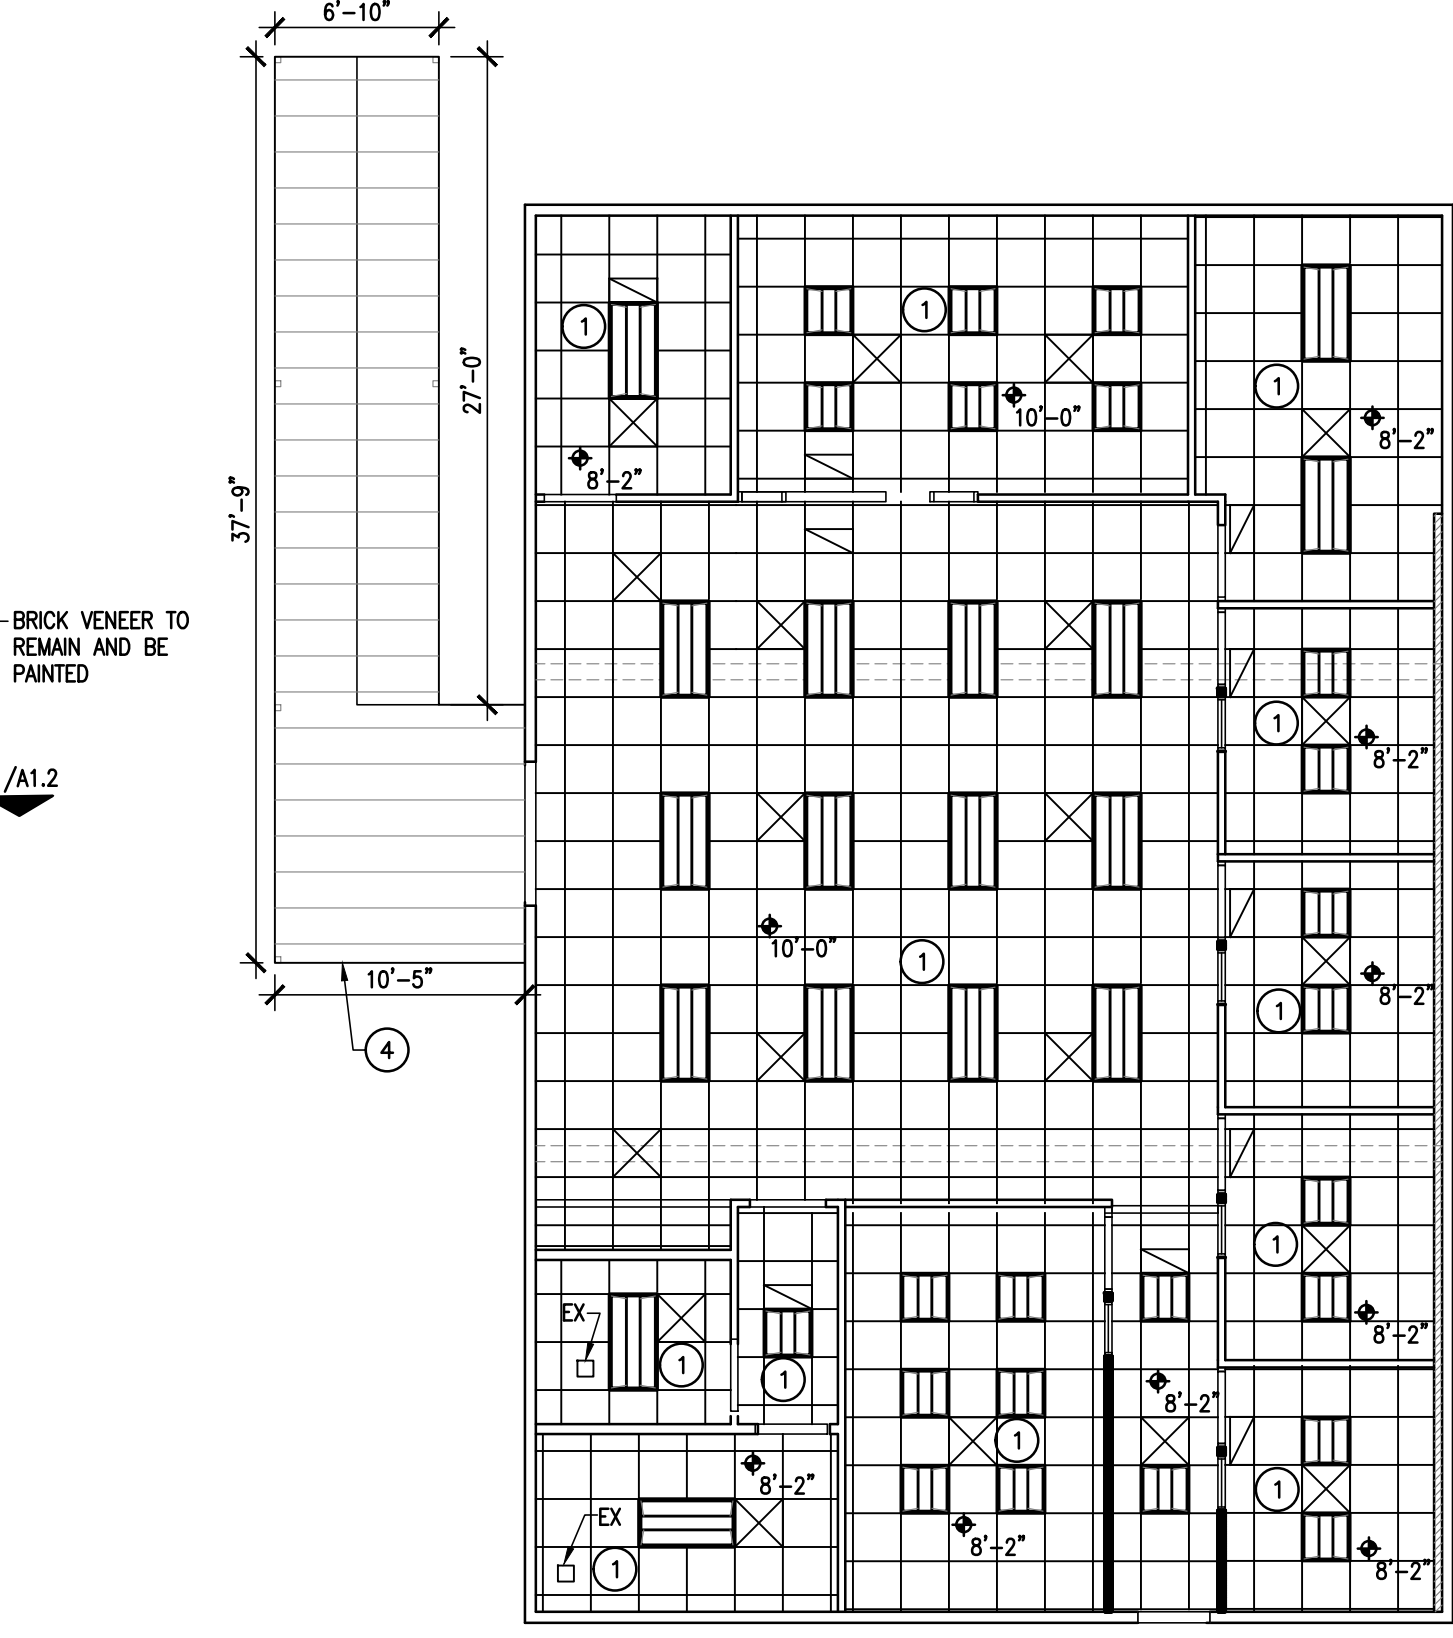

02 PHASE 1 REFLECTED CEILING PLAN
A1.0 SCALE: 1/8"=1'-0"

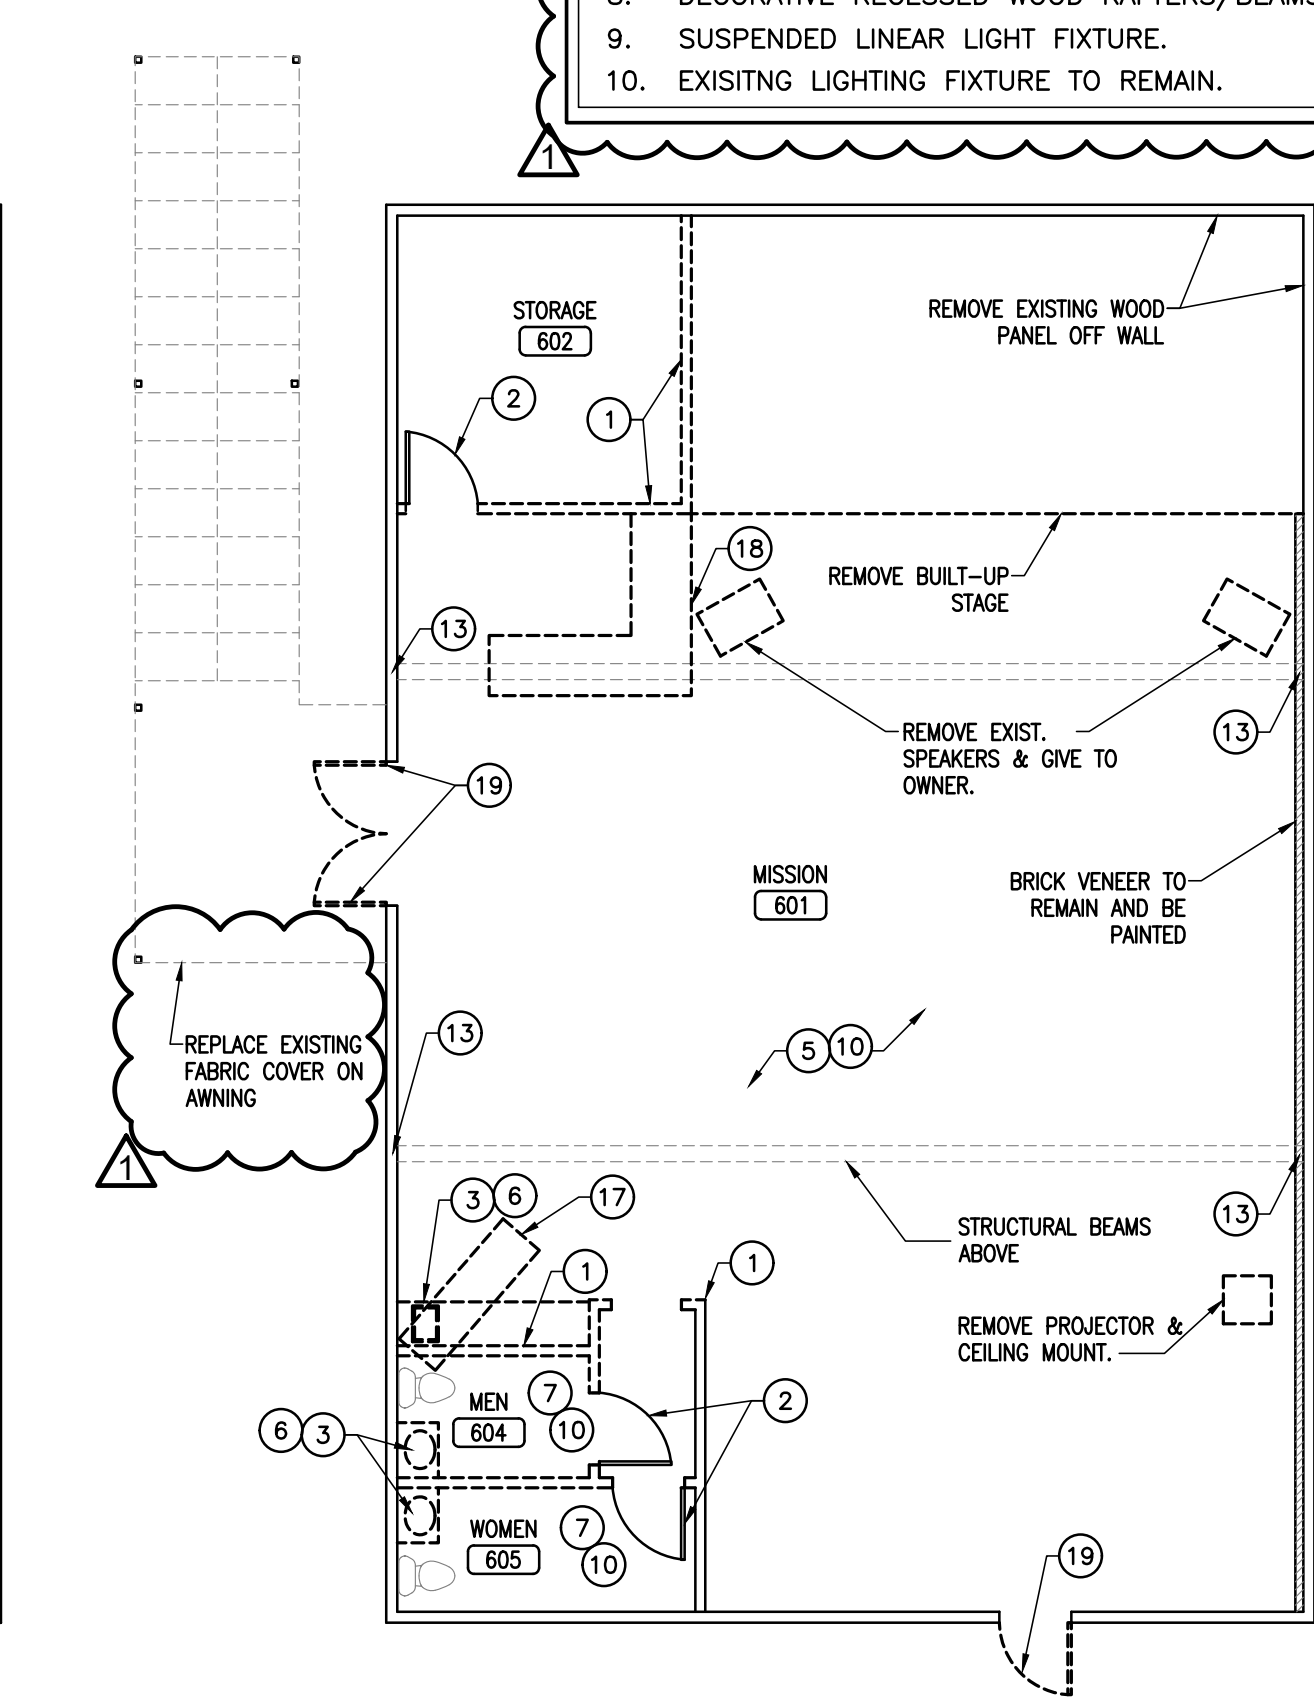


01 PHASE 1 DEMO FLOOR PLAN
A1.0 SCALE: 1/8"=1'-0"



PHASING/
KEY PLAN
NORTH

NOTE: DIMENSIONS ARE TO INSIDE FACE OF EXISTING SHEETROCK OR BRICK ON EXTERIOR WALLS.

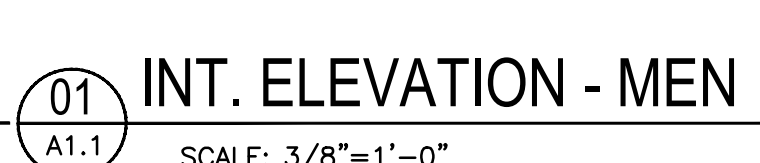


GLAZING LEGEND	
ICT	INSULATED CLEAR TEMPERED GLAZING
CT	1/4" CLEAR TEMPERED GLAZING
F	FIRE RATED GLASS
IC	INSULATED CLEAR GLAZING
IF	INSULATED FROSTED GLAZING
CA	CLEAR ACRYLIC GLAZING

A1.1

PROSTUD FULL COMPOSITE						
LIMITING HEIGHTS						
**TAKEN FROM THE 2025 CLARK DIETRICH PRO STUD PRODUCT CATALOG FOR ADDITIONAL INFORMATION AND REQUIREMENTS ON NON-LOAD BEARING WALL CONSTRUCTION.						
5/8" TYPE X GYPSUM						
WIDTH	STUD MEMBER	DESIGN THICKNESS (IN)	YIELD STRENGTH (KSL)	SPACING (IN)	LATORAL LOAD - 5 PSF	
3-5/8"	PROSTUD 25 362PDS125-15	0.0158	50	12	17'-1"	
				16	15'-6"	
				24	13'-6"	
	PROSTUD 20 362PDS125-18	0.0190	70	12	18'-2"	
				16	16'-10"	
				24	15'-1"	
	PROSTUD 30 362PDS125-30	0.0312	33	12	20'-5"	
				16	18'-6"	
				24	16'-2"	
	PROSTUD 33 362PDS125-33	0.0346	33	12	21'-2"	
				16	19'-2"	
				24	16'-9"	

PROSTUD NON-COMPOSITE						
LIMITING HEIGHTS						
**TAKEN FROM THE 2025 CLARK DIETRICH PRO STUD PRODUCT CATALOG FOR ADDITIONAL INFORMATION AND REQUIREMENTS ON NON-LOAD BEARING WALL CONSTRUCTION.						
5/8" TYPE X GYPSUM						
WIDTH	STUD MEMBER	DESIGN THICKNESS (IN)	YIELD STRENGTH (KSL)	SPACING (IN)	LATORAL LOAD - 5 PSF	
3-5/8"	PROSTUD 25 362PDS125-15	0.0158	50	12	12'-5"	
				16	10'-9"	
				24	8'-9"	
	PROSTUD 20 362PDS125-18	0.0190	70	12	14'-6"	
				16	13'-2"	
				24	10'-9"	
	PROSTUD 30 362PDS125-30	0.0312	33	12	17'-4"	
				16	15'-9"	
				24	13'-9"	
	PROSTUD 33 362PDS125-33	0.0346	33	12	17'-11"	
				16	16'-3"	
				24	14'-3"	

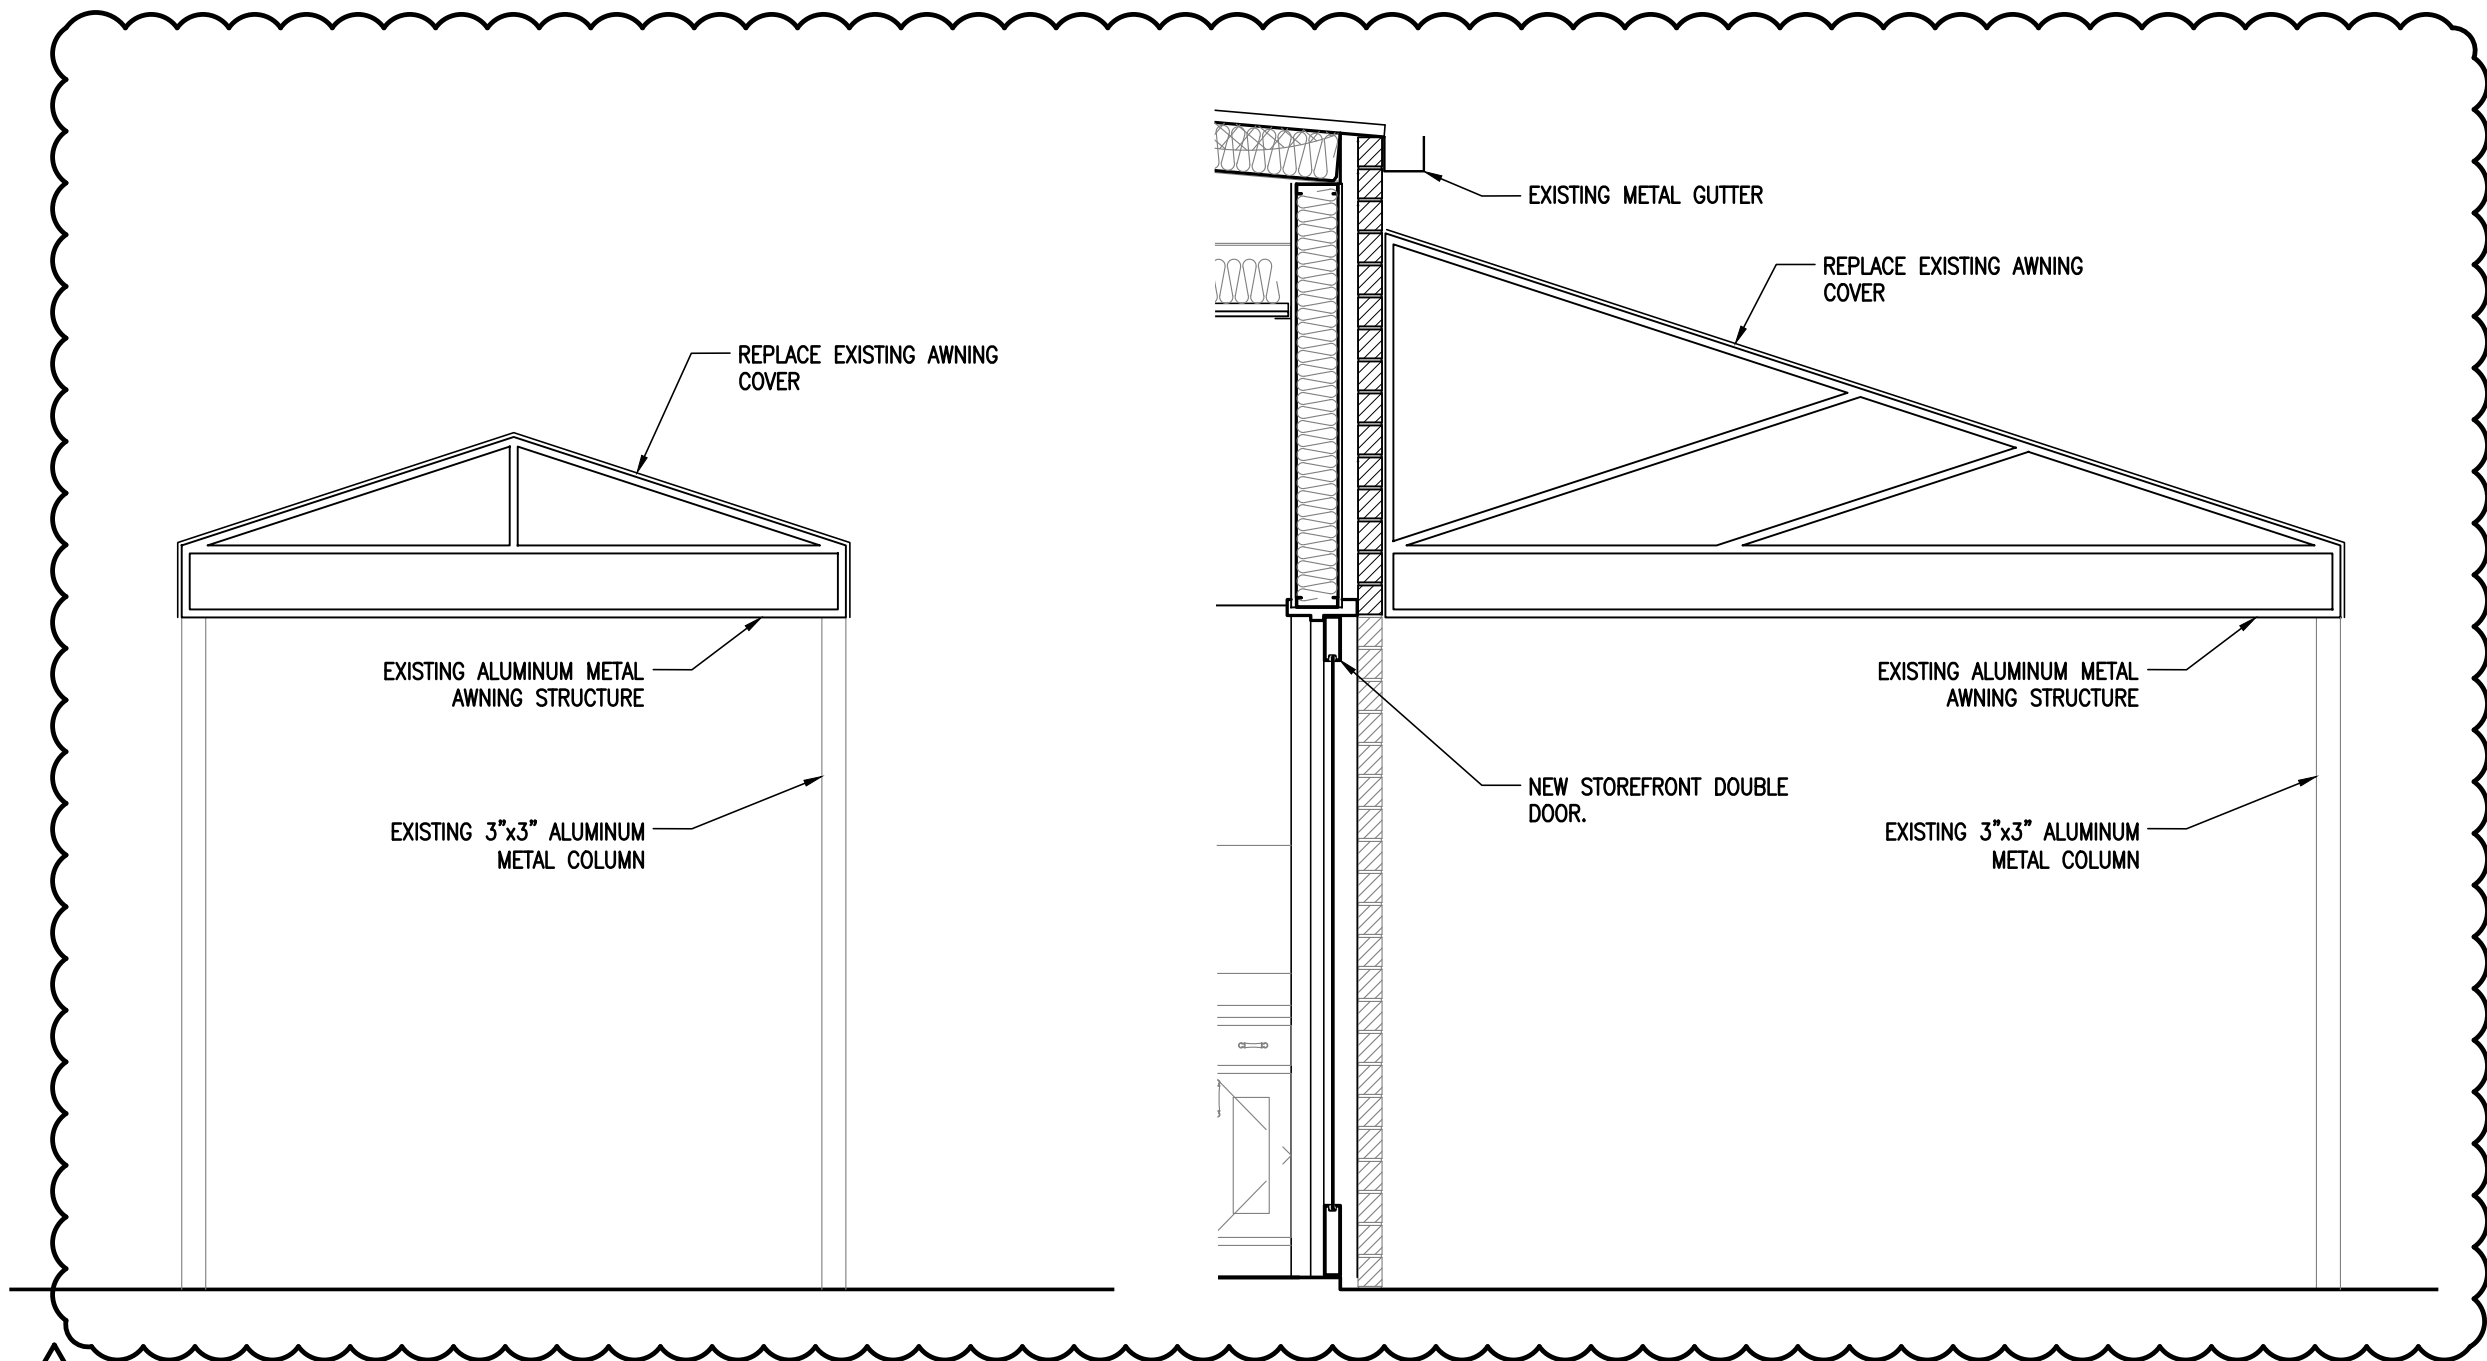


09 CANOPY SECTION

SCALE: 1/2"=1'-0"


08 CANOPY SECTION

SCALE: 1/2"=1'-0"

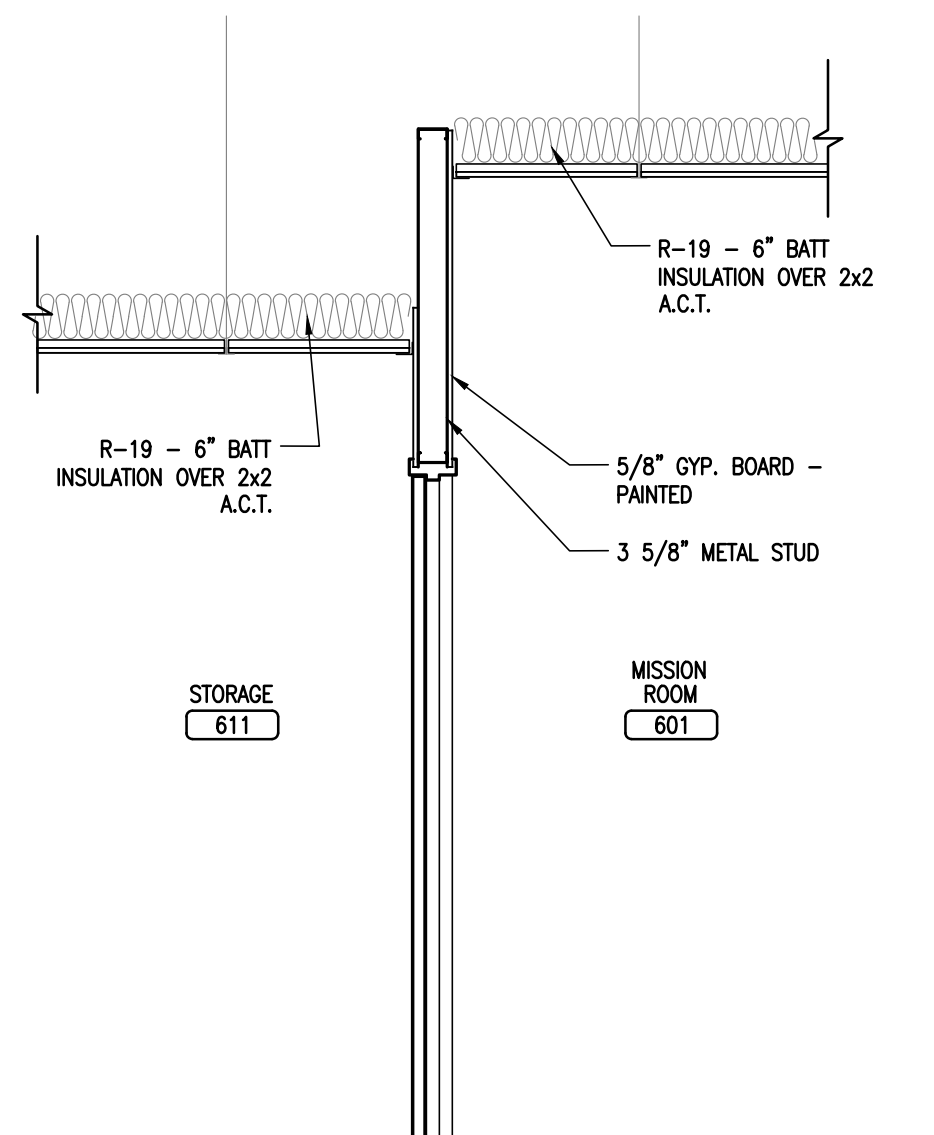


07 WALL SECTION - TYP.

SCALE: 1/2"=1'-0"

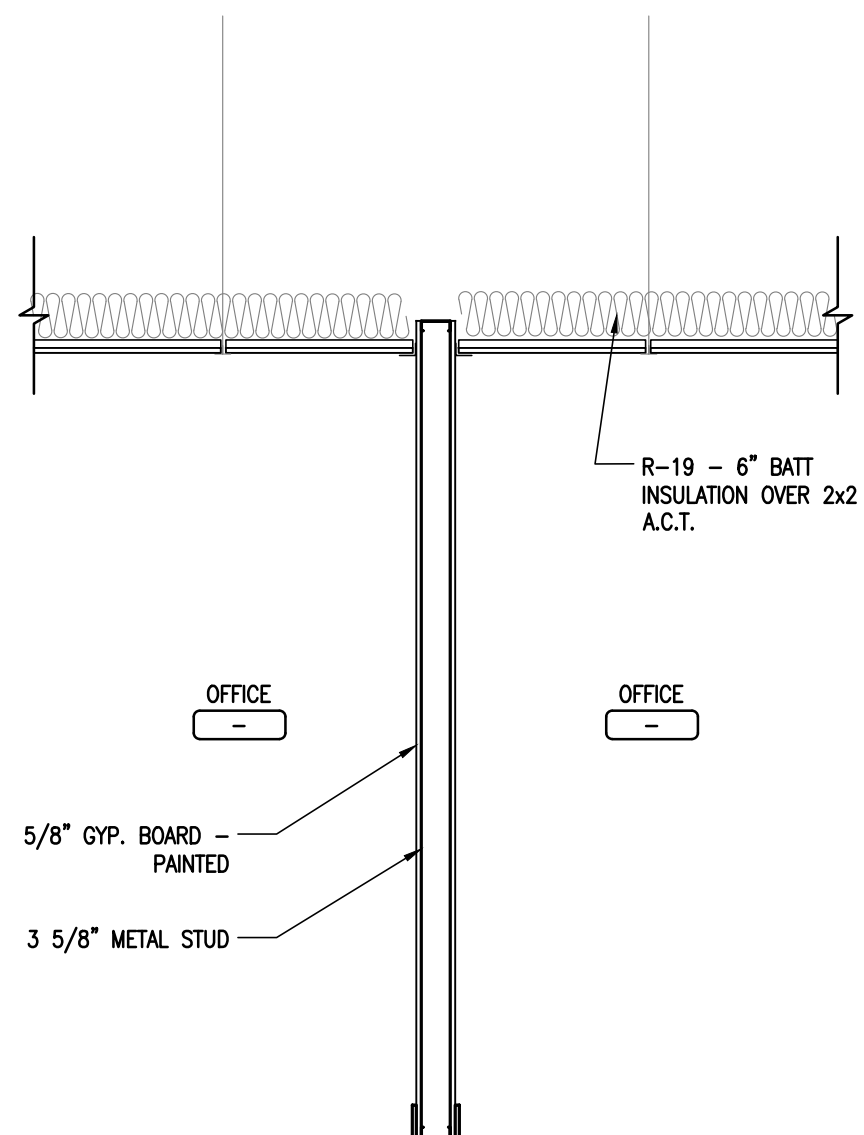


06 WALL SECTION - TYP.

SCALE: 1/2"=1'-0"

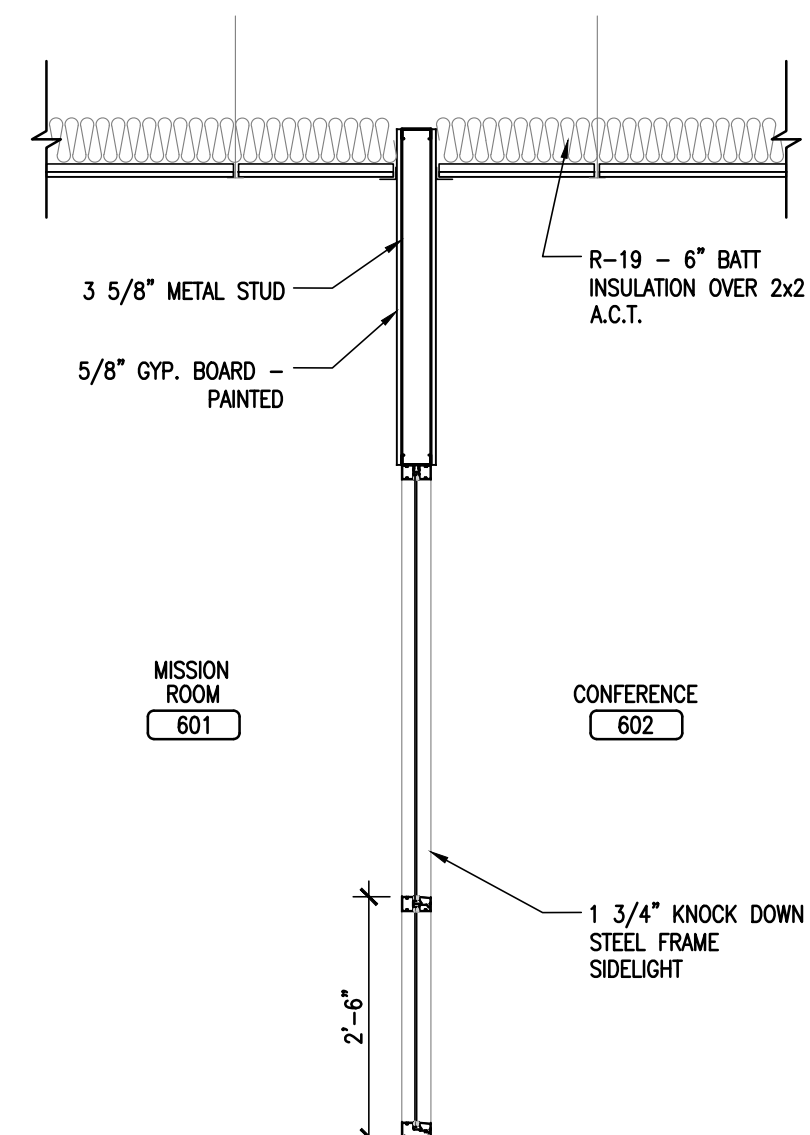


05 WALL SECTION

SCALE: 1/2"=1'-0"

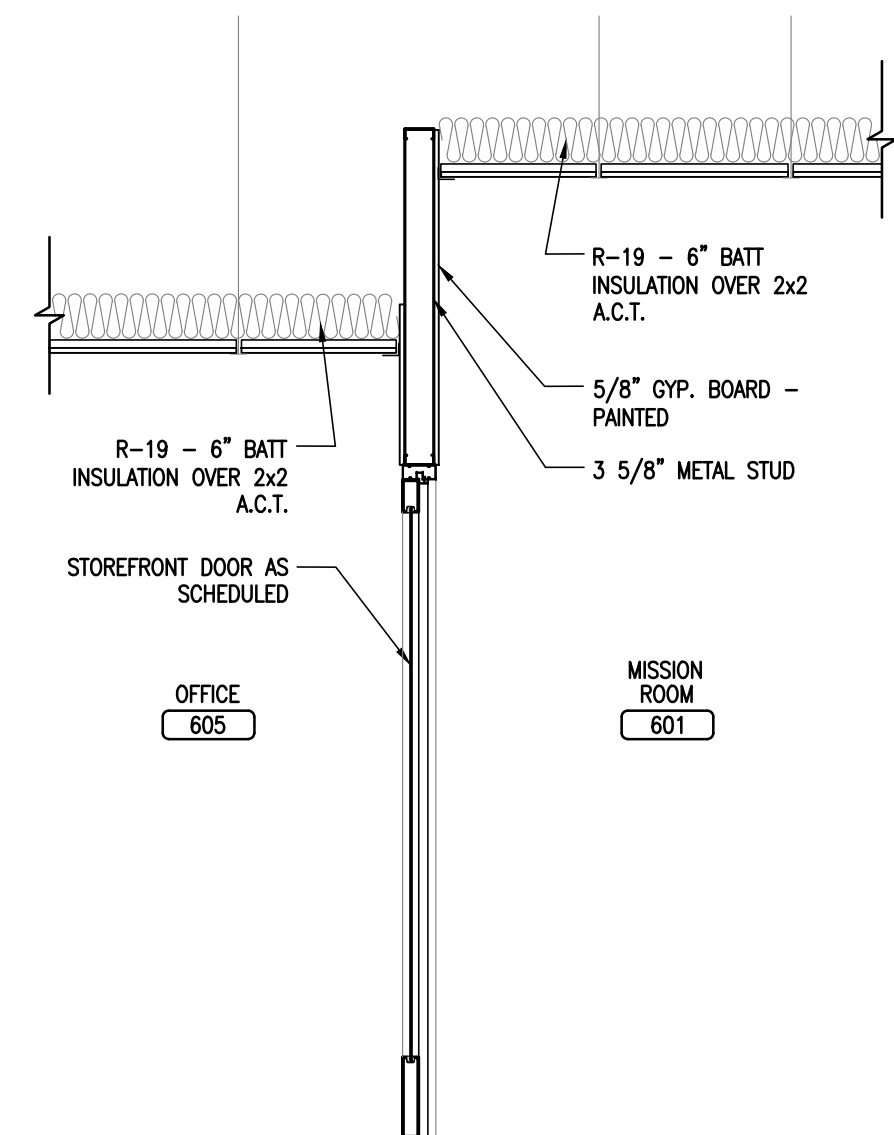


04 WALL SECTION

SCALE: 1/2"=1'-0"

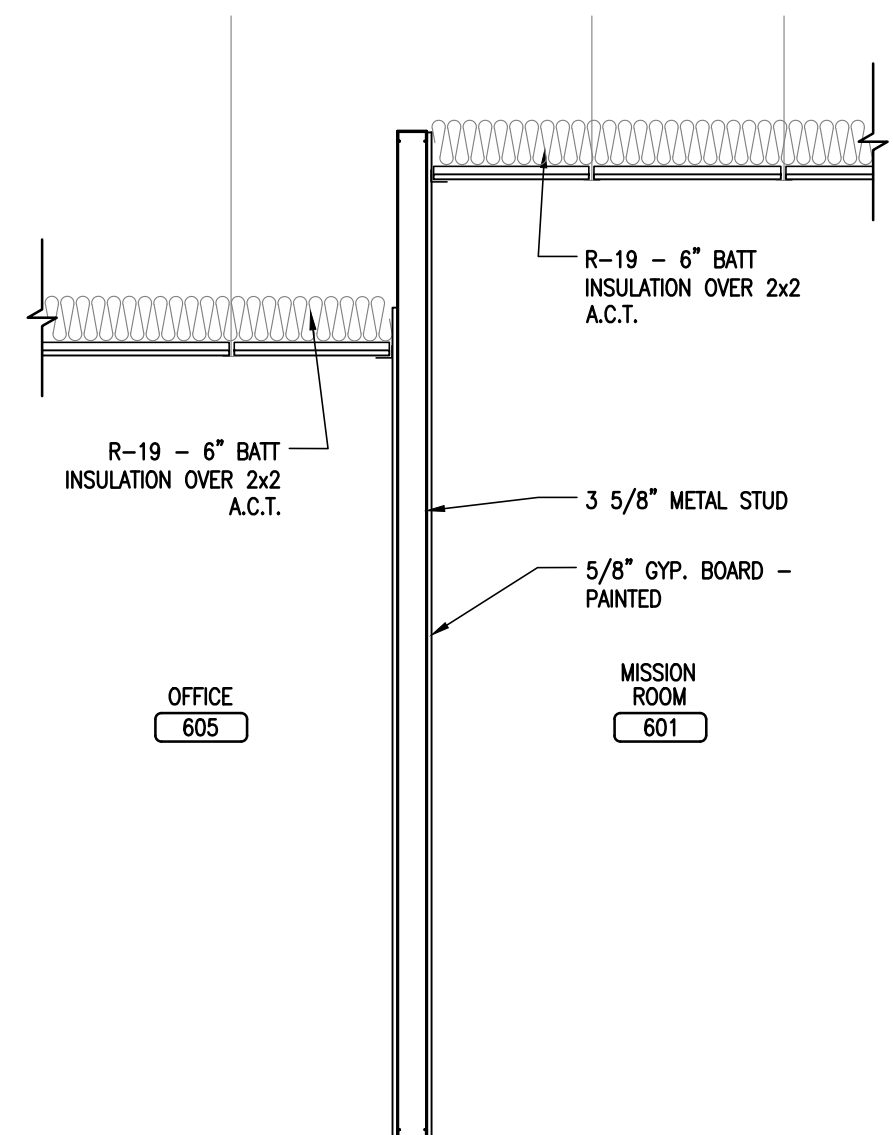


03 WALL SECTION

SCALE: 1/2"=1'-0"

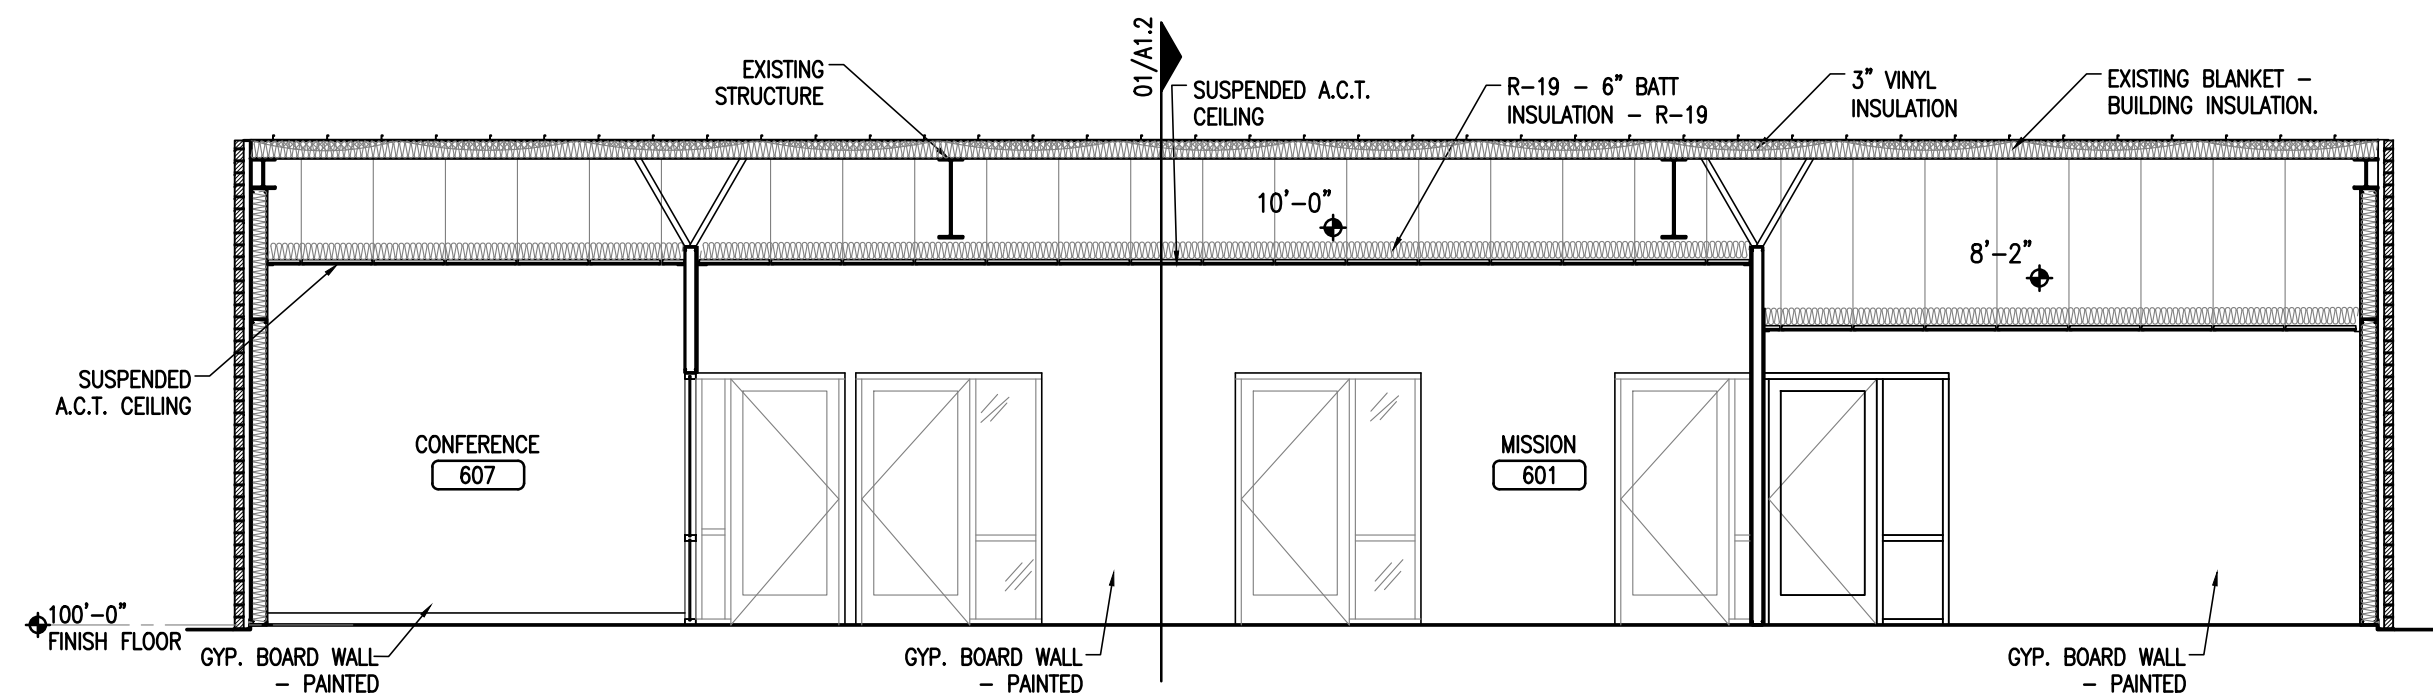


02 BUILDING SECTION

SCALE: 3/16"=1'-0"

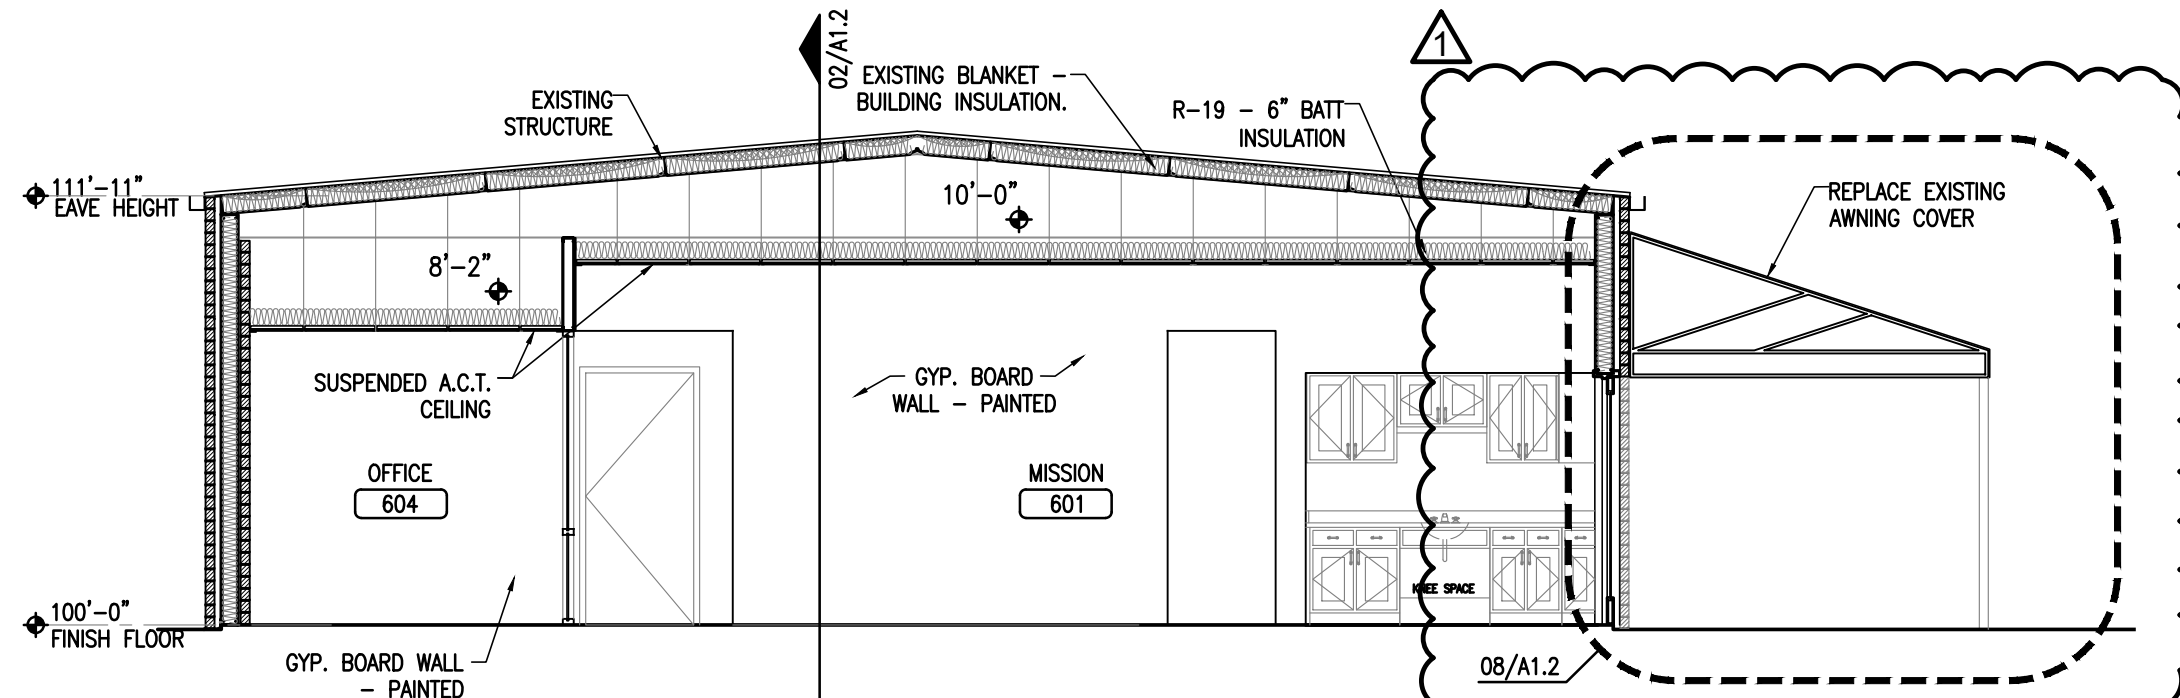

01 BUILDING SECTION

SCALE: 3/16"=1'-0"

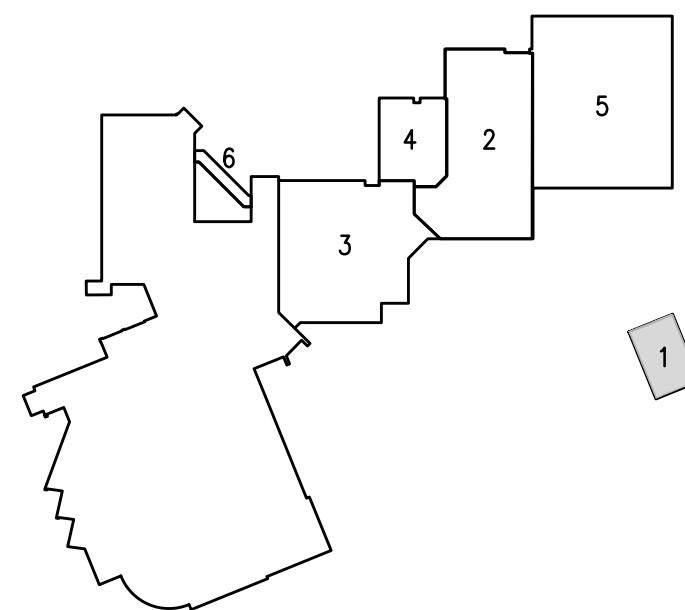

KEY PLAN
NORTH



DATE: 08/14/24

ISSUE:

REVISION:

REVISED 04-30-25

SHEET TITLE:

PHASE 1
BUILDING SECTIONS
& DETAILS

A1.2


ARCHITECTURE
PLANNING
INTERIOR DESIGN

GHILA

NORTHWOOD CHURCH
RENOVATIONS

1870 RUFE SNOW DR.
KELLER, TEXAS 76248

1300 WEST RANDOL MILL ROAD, ARLINGTON, TEXAS 76012
817.801.7200
www.ghila-inc.com

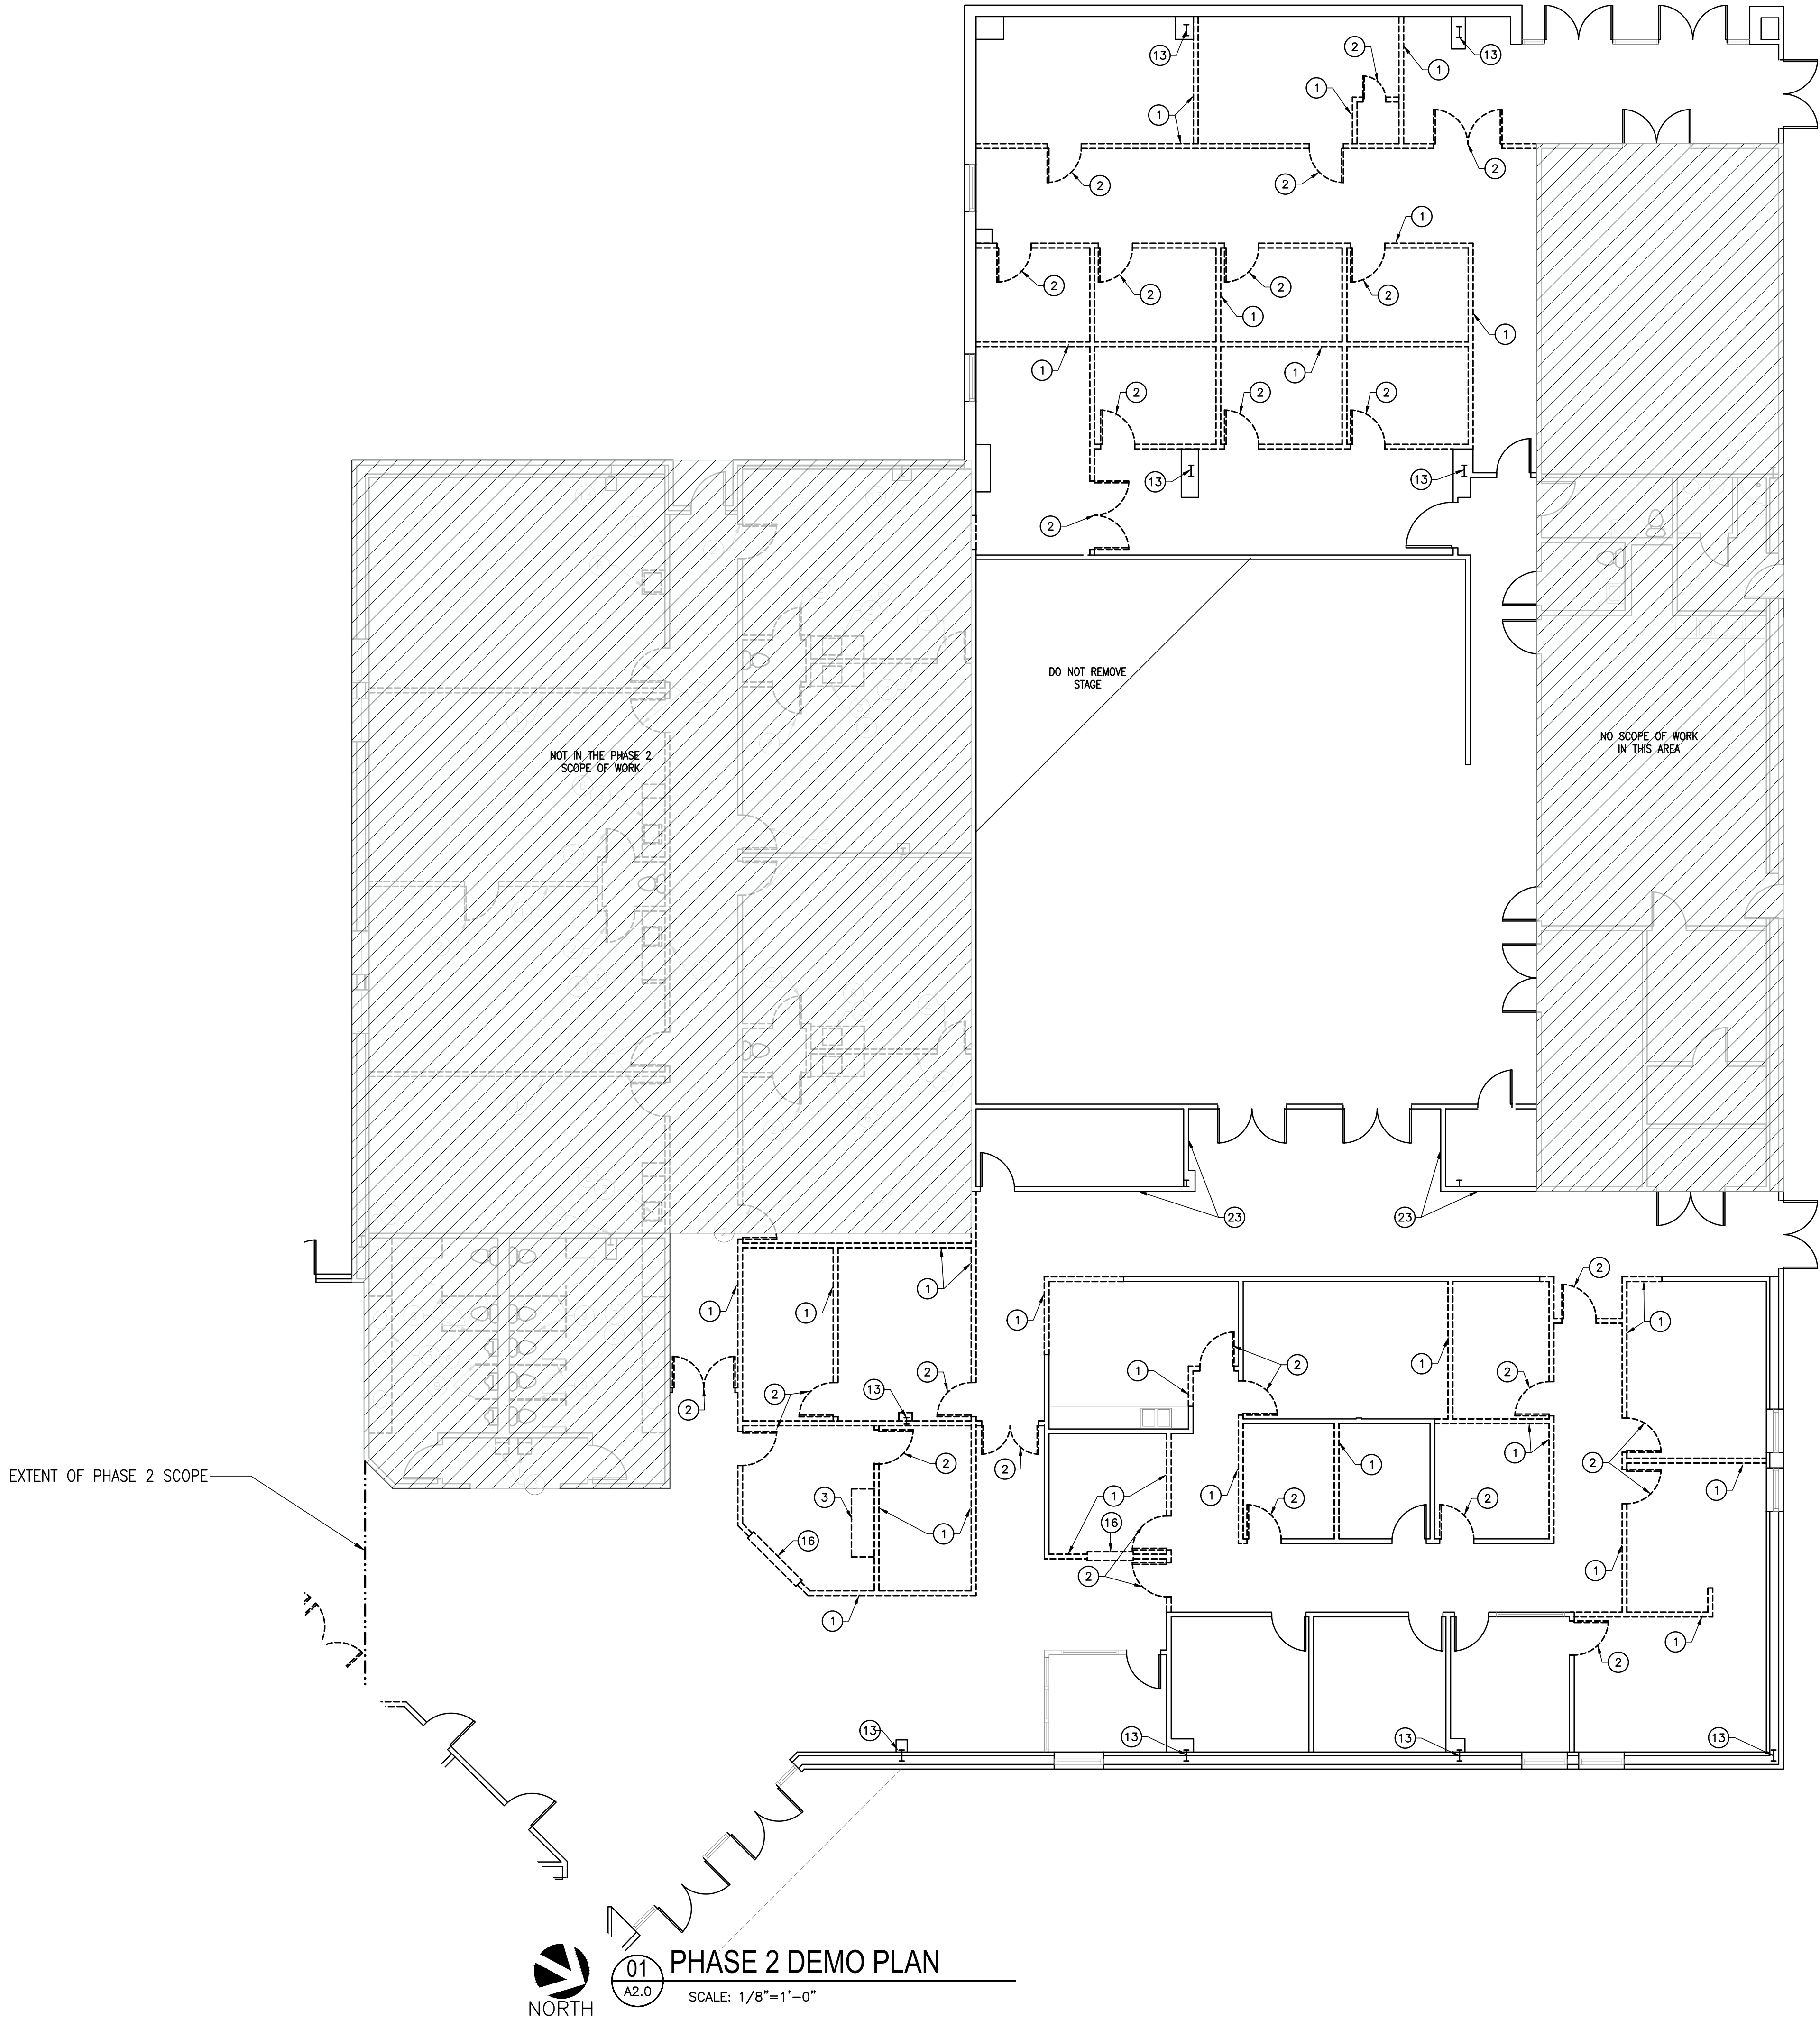


- ### GENERAL DEMOLITION NOTES
1. REMOVE BUILDING ELEMENTS AS INDICATED AND TO THE EXTENT NECESSARY TO ACCOMPLISH THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. ELECTRICAL AND PLUMBING FIXTURES AND DEVICES REMOVED DURING DEMOLITION SHALL INCLUDE THE REMOVAL OF ALL ASSOCIATED WIRES, CONDUIT, AND LINES IN THEIR ENTIRETY BACK TO THE SOURCE OR TO UNDER A POINT OUT OF CONFLICT WITH THE NEW WORK AND OUT OF SIGHT.
 2. ALL MATERIALS, FIXTURES, ETC. INDICATED TO BE REMOVED SHALL BE DISPOSED OF PROPERLY OFF SITE BY THE CONTRACTOR UNLESS NOTED OTHERWISE.
 3. REMOVE BUILDING ELEMENTS IN SUCH A MANNER TO FACILITATE THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. PREPARE ALL SURFACES TO RECEIVE NEW FINISH AS SCHEDULED.
 4. CONTRACTOR TO DETERMINE LOAD BEARING WALLS PRIOR TO DEMOLITION. RESHORE AS NECESSARY DURING ALL PHASES OF WORK.
 5. COORDINATE WITH FACILITIES MANAGEMENT FOR REMOVAL, STORAGE, AND RELOCATION OF FACILITY FURNITURE, FIXTURES, AND EQUIPMENT DURING CONSTRUCTION.
 6. PROTECT EXISTING CONSTRUCTION TO REMAIN FROM DEMOLITION PROCESS INCLUDING DUST AND DAMAGE CAUSED BY FOOT TRAFFIC.
 7. PATCH AND REPAIR ALL EXISTING WALLS AND CEILINGS TO REMAIN WITH TEXTURE TO MATCH EXISTING. PREPARE SURFACES FOR NEW PAINT.
 8. DOORS, FRAMES AND HARDWARE REMOVED DURING DEMOLITION SHALL BE SALVAGED FOR REUSE. COORDINATE WITH NEW DOOR SCHEDULE REQUIREMENTS. REFURBISH EXISTING DOORS AND FRAMES REUSED.
 9. LIGHT FIXTURES AND CEILING MOUNTED DEVICES AND EQUIPMENT SHALL BE REMOVED OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY. REF. REFLECTED CEILING PLAN AND MEP FOR FULL SCOPE OF NEW CONSTRUCTION.
 10. MECHANICAL AIR DIFFUSER/RETURN TO BE RELOCATED OR REMOVED TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY.
 11. FIRE SPRINKLERS AND ALARMS SHALL BE MODIFIED AND/OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUTS.
 12. REMOVE ALL FLOORING THROUGHOUT, U.O.N. FLOORING INCLUDES CARPET, WOOD FLOORING, VCT AND SHEET VINYL. WALL BASE INCLUDES WOOD BASE, VINYL BASE AND CARPET BASE.
 13. PER STATE LAW, AN ASBESTOS SURVEY MUST BE PERFORMED AND ANY MATERIAL FOUND TO BE AFFECTED BY CONSTRUCTION THAT ASBESTOS MUST BE PROPERLY ABATED.
 14. ITEMS TO BE REMOVED OR DEMOLISHED SHOWN DASHED AND BOLD.

- ### DEMOLITION NOTES BY NUMBERS ○
1. REMOVE EXISTING WALL (DASHED).
 2. REMOVE AND COORDINATE THE REUSE OF DOOR FRAME AND HARDWARE IN NEW LOCATION.
 3. REMOVE EXISTING CABINETRY.
 4. REMOVE EXISTING WINDOW.
 5. REMOVE EXISTING LIGHT FIXTURE(S).
 6. REMOVE EXISTING PLUMBING FIXTURE.
 7. REMOVE EXISTING LAY-IN CEILING.
 8. EXISTING CEILING AND LIGHTING TO REMAIN.
 9. REMOVE EXISTING TOILET PARTITIONS.
 10. REMOVE EXISTING CARPET AND/OR VINYL FLOORING.
 11. REMOVE AND RELOCATE EXISTING PAPER TOWEL DISPENSER.
 12. REMOVE AND COORDINATE THE REUSE OF 2x2 A.C.T. CEILING.
 13. STRUCTURAL COLUMN, PROTECT DURING CONSTRUCTION.
 14. REMOVE WALL TO CREATE OPENING FOR NEW EXTERIOR DOOR AND FRAME.
 15. REMOVE BAPTISTERY.
 16. REMOVE ROLLING COUNTER SHUTTER.
 17. REMOVE PORTION OF CONCRETE SLAB FOR NEW PLUMBING.
 18. DISMANTLE AND REMOVE PORTABLE DESK.
 19. REMOVE EXISTING STEEL DOOR(S) AND FRAME.
 20. EXISTING CONCRETE BASE TO BE REMOVED AND REPLACED.
 21. CONDENSING UNIT TO BE REMOVED AND RELOCATED.
 22. REMOVE AND COORDINATE THE REUSE OF BABY TOILET BOWLS.
 23. PROTECT AND PRESERVE WALL MURAL DURING DEMOLITION AND CONSTRUCTION.

DEMOLITION LEGEND

	EXISTING TO REMAIN
	TO BE DEMOLISHED/ REMOVED
	NO DEMOLITION SCOPE WITHIN THIS AREA IN THIS PHASE

AREA PER PHASE	
PHASE 2	13,030 SQ. FT.

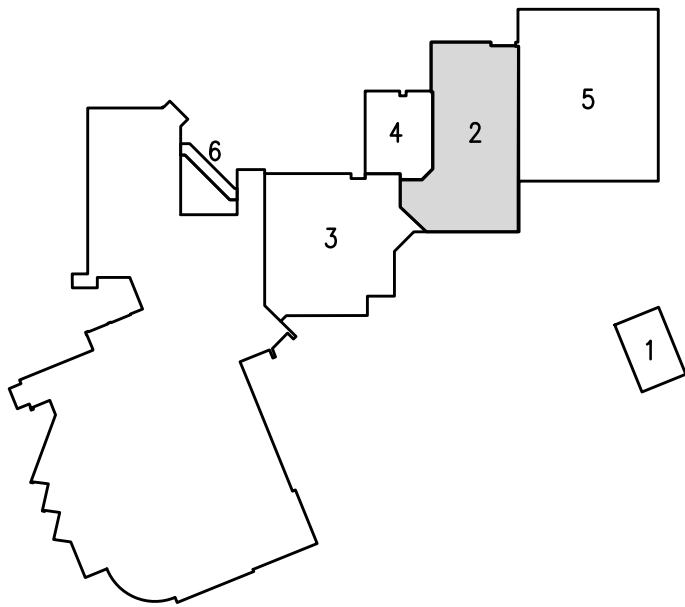

PHASING/
KEY PLAN

**NORTHWOOD CHURCH
RENOVATIONS**
1870 RUFE SNOW DR.
KELLER, TEXAS 76248



DATE: 08/14/24

ISSUE:

REVISION:

△ REVISED 04-30-25

SHEET TITLE:

PHASE 2
DEMO
FLOOR PLANS

A2.0

ARCHITECTURE
PLANNING
INTERIOR DESIGN

GHLA

1300 WEST RANDOL MILL ROAD, ARLINGTON, TEXAS 76012
817.801.7200
www.gbla-inc.com



01
A2.0

PHASE 2 DEMO PLAN

SCALE: 1/8"=1'-0"

GENERAL DEMOLITION NOTES


1. REMOVE BUILDING ELEMENTS AS INDICATED AND TO THE EXTENT NECESSARY TO ACCOMPLISH THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. ELECTRICAL AND PLUMBING FIXTURES AND DEVICES REMOVED DURING DEMOLITION SHALL INCLUDE THE REMOVAL OF ALL ASSOCIATED WIRES, CONDUIT, AND LINES IN THEIR ENTIRETY BACK TO THE SOURCE OR TO UNDER A POINT OUT OF CONFLICT WITH THE NEW WORK AND OUT OF SIGHT.
2. ALL MATERIALS, FIXTURES, ETC. INDICATED TO BE REMOVED SHALL BE DISPOSED OF PROPERLY OFF SITE BY THE CONTRACTOR UNLESS NOTED OTHERWISE.
3. REMOVE BUILDING ELEMENTS IN SUCH A MANNER TO FACILITATE THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. PREPARE ALL SURFACES TO RECEIVE NEW FINISH AS SCHEDULED.
4. CONTRACTOR TO DETERMINE LOAD BEARING WALLS PRIOR TO DEMOLITION. RESHORE AS NECESSARY DURING ALL PHASES OF WORK.
5. COORDINATE WITH FACILITIES MANAGEMENT FOR REMOVAL, STORAGE, AND RELOCATION OF FACILITY FURNITURE, FIXTURES, AND EQUIPMENT DURING CONSTRUCTION.
6. PROTECT EXISTING CONSTRUCTION TO REMAIN FROM DEMOLITION PROCESS INCLUDING DUST AND DAMAGE CAUSED BY FOOT TRAFFIC.
7. PATCH AND REPAIR ALL EXISTING WALLS AND CEILINGS TO REMAIN WITH TEXTURE TO MATCH EXISTING. PREPARE SURFACES FOR NEW PAINT.
8. DOORS, FRAMES AND HARDWARE REMOVED DURING DEMOLITION SHALL BE SALVAGED FOR REUSE. COORDINATE WITH NEW DOOR SCHEDULE REQUIREMENTS, REFURBISH EXISTING DOORS AND FRAMES REUSED.
9. LIGHT FIXTURES AND CEILING MOUNTED DEVICES AND EQUIPMENT SHALL BE REMOVED OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY. REF. REFLECTED CEILING PLAN AND MEP FOR FULL SCOPE OF NEW CONSTRUCTION.
10. MECHANICAL AIR DIFFUSER/RETURN TO BE RELOCATED OR REMOVED TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY.
11. FIRE SPRINKLERS AND ALARMS SHALL BE MODIFIED AND/OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUTS. CONTRACTOR TO FIELD VERIFY.
12. REMOVE ALL FLOORING THROUGHOUT, U.O.N. FLOORING INCLUDES CARPET, WOOD FLOORING, VCT AND SHEET VINYL. WALL BASE INCLUDES WOOD BASE, VINYL BASE AND CARPET BASE.
13. PER STATE LAW, AN ASBESTOS SURVEY MUST BE PERFORMED AND ANY MATERIAL FOUND TO BE AFFECTED BY CONSTRUCTION THAT ASBESTOS MUST BE PROPERLY ABATED.
14. ITEMS TO BE REMOVED OR DEMOLISHED SHOWN DASHED AND BOLD.

DEMOLITION NOTES BY NUMBERS ○

1. REMOVE EXISTING WALL (DASHED).
2. REMOVE AND COORDINATE THE REUSE OF DOOR FRAME AND HARDWARE IN NEW LOCATION.
3. REMOVE EXISTING CABINETRY.
4. REMOVE EXISTING WINDOW.
5. REMOVE EXISTING LIGHT FIXTURE(S).
6. REMOVE EXISTING PLUMBING FIXTURE.
7. REMOVE EXISTING LAY-IN CEILING.
8. EXISTING CEILING AND LIGHTING TO REMAIN.
9. REMOVE EXISTING TOILET PARTITIONS.
10. REMOVE EXISTING CARPET AND/OR VINYL FLOORING.
11. REMOVE AND RELOCATE EXISTING PAPER TOWEL DISPENSER.
12. REMOVE AND COORDINATE THE REUSE OF 2x2 A.C.T. CEILING.
13. STRUCTURAL COLUMN, PROTECT DURING CONSTRUCTION.
14. REMOVE WALL TO CREATE OPENING FOR NEW EXTERIOR DOOR AND FRAME.
15. REMOVE BAPTISTERY.
16. REMOVE ROLLING COUNTER SHUTTER.
17. REMOVE PORTION OF CONCRETE SLAB FOR NEW PLUMBING.
18. DISMANTLE AND REMOVE PORTABLE DESK.
19. REMOVE EXISTING STEEL DOOR(S) AND FRAME.
20. EXISTING CONCRETE BASE TO BE REMOVED AND REPLACED.
21. CONDENSING UNIT TO BE REMOVED AND RELOCATED.
22. REMOVE AND COORDINATE THE REUSE OF BABY TOILET BOWLS.

DEMOLITION LEGEND

- EXISTING TO REMAIN
- TO BE DEMOLISHED/ REMOVED
- NO DEMOLITION SCOPE WITHIN THIS AREA IN THIS PHASE

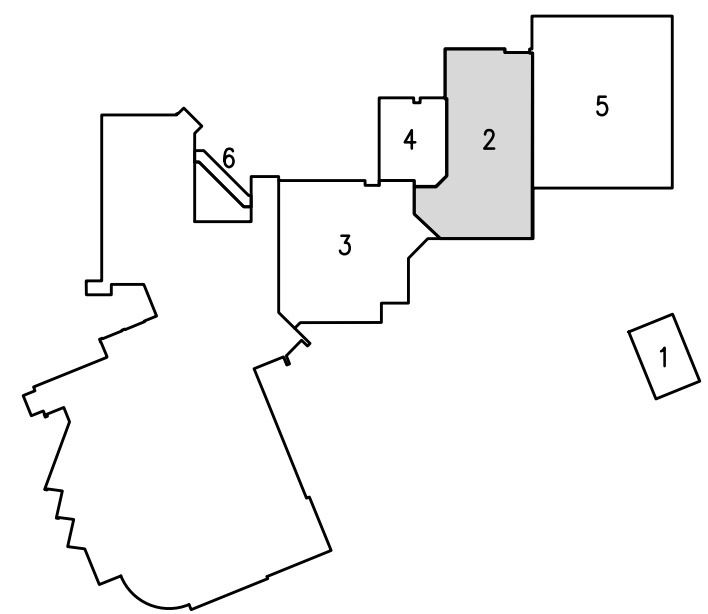

NOTE:
REUSE EXISTING SUSPENDED STAGE LIGHTS AND PROJECTOR
IN FELLOWSHIP HALL.

NOT IN THE PHASE 2
SCOPE OF WORK

NO SCOPE OF WORK
IN THIS AREA

EXTENT OF PHASE 2 SCOPE

P2 ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLOOR	BASE	WALLS	CEILING	NOTES
125	OFFICE	CPT	VB	P	ACT	
126	OFFICE	CPT	VB	P	ACT	
127	OFFICE	CPT	VB	P	ACT	
128	OFFICE	CPT	VB	P	ACT	
129	OFFICE	CPT	VB	P	ACT	
130	OFFICE	CPT	VB	P	ACT	
131	OFFICE	CPT	VB	P	ACT	
132	OFFICE	CPT	VB	P	ACT	
133	CORRIDOR	LVP	VB	P	ACT	
139	CHILDREN'S CHECK-IN	LVP	VB	P	ACT	
140	OMITTED	-	-	-	-	
200	NURSERY	CPT	VB	P	ACT	
201	NURSERY	CPT	VB	P	ACT	
202	TODDLERS	CPT	VB	P	ACT	
203	TODDLERS	CPT	VB	P	ACT	
206	JANITORS CLOSET	LVP	VB	P	ACT	
207	STORAGE	LVP	VB	P	ACT	
221	CORRIDOR-SEE NOTE BELOW	LVP	VB	P	ACT	
222	TOILET	LVP	VB	EPX	ACT	
500	FELLOWSHIP HALL	CPT	VB	P	ACT	
501	GYM/MULTI-PURPOSE	SC	VB	P	OPEN	
502	CORRIDOR	LVP	VB	P	ACT	

FLOORING:
CPT CARPET TILE
LVP LUXURY VINYL PLANK
ETR EXISTING TO REMAIN
PT PORCELAIN TILE
SC SEALED CONCRETE

WALLS:
P PAINT AND TEXTURE ON GYP. BD.
CT PORCELAIN TILE
EPX EPOXY PAINT COATING

BASE:
VB VINYL BASE

CEILING:
P PAINT AND TEXTURE ON GYP. BD.
ACT LAY-IN ACOUSTICAL TILE

GENERAL NOTES:

1. REFER TO INTERIOR ELEVATIONS FOR ADDITIONAL INFO.
2. BASE IN BATHROOMS SHALL BE 4" TALL.

NOTE: THE WALL MURAL IN CORRIDOR 221 IS TO REMAIN. PLEASE TAKE PRECAUTIONS TO PROTECT AND PRESERVE THE MURAL DURING DEMOLITION AND CONSTRUCTION PHASES.

P2 DOOR SCHEDULE


DOOR NO.	TYPE	SIZE	MATL	FRAME	FIRE	HW
125	-	3'-0" X 7'-0"	WD	D	-	EXIST.
126	5	3'-0" X 7'-0"	WD	D	STL	1
127	-	3'-0" X 7'-0"	WD	D	-	EXIST.
128	6	3'-0" X 7'-0"	WD	D	STL	1
129	-	3'-0" X 7'-0"	WD	D	-	EXIST.
130	-	3'-0" X 7'-0"	WD	D	-	EXIST.
131	-	3'-0" X 7'-0"	WD	D	-	EXIST.
132	5	3'-0" X 7'-0"	WD	D	STL	1
133	7	3'-0" X 7'-0"	ALUM	G ALUM	-	-
139A	6	(2)3'-0" X 7'-0"	WD	E STL	-	13
139B	6	(2)3'-0" X 7'-0"	WD	F STL	-	7
140	-	OMITTED	-	-	-	-
200	9	3'-0" X 7'-0"	WD	D	STL	2
201	9	3'-0" X 7'-0"	WD	D	STL	2
202	9	3'-0" X 7'-0"	WD	D	STL	2
203	9	3'-0" X 7'-0"	WD	D	STL	2
206	-	3'-0" X 7'-0"	WD	-	-	EXIST.
207	-	3'-0" X 7'-0"	WD	-	-	EXIST.
208	-	(2)3'-0" X 7'-0"	WD	-	-	EXIST.
216	-	4'-0" X 7'-0"	WD	-	-	EXIST.
217	6	(2)3'-0" X 7'-0"	WD	F STL	-	8
219	6	(2)3'-0" X 7'-0"	WD	B STL	90 MIN	7
221A	6	(2)3'-0" X 7'-0"	WD	F STL	-	7
221B	6	(2)3'-0" X 7'-0"	WD	B STL	90 MIN	7
222A	5	3'-0" X 7'-0"	WD	D	STL	4
222B	5	3'-0" X 7'-0"	WD	D	STL	4
500A	-	(2)3'-0" X 7'-0"	WD	-	-	EXIST.
500B	-	(2)3'-0" X 7'-0"	WD	-	-	EXIST.
501A	5	3'-0" X 7'-0"	WD	D	STL	12
501B	5	3'-0" X 7'-0"	WD	D	STL	12
502	-	3'-0" X 7'-0"	WD	-	-	EXIST.

GENERAL NOTES:

1. ALL DOORS TO BE 1 3/4" U.N.O..
2. EXIT DEVICES SHALL COME WITH LOCKING LOCKSET ON OPPOSING SIDE OF DOOR
3. DOOR SURFACES WITHIN 10" OF THE FINISH FLOOR OR GROUND MEASURED VERTICALLY SHALL HAVE A SMOOTH SURFACE ON THE PUSH SIDE EXTENDING THE FULL WIDTH OF THE DOOR.
4. ALL DOORS ARE TO BE PAINTED EXCEPT FOR DOORS IN PHASE 1.
5. NO VISION PANELS ON TOILET ENTRY DOORS.

DOOR/FRAME MATERIAL

PLM PLASTIC LAMINATE CLAD
HML HOLLOW/PRESSED METAL
MTL METAL
STL STEEL
ALUM ALUMINUM STOREFRONT
RELOCATE EXIST. EXTERIOR DOORS

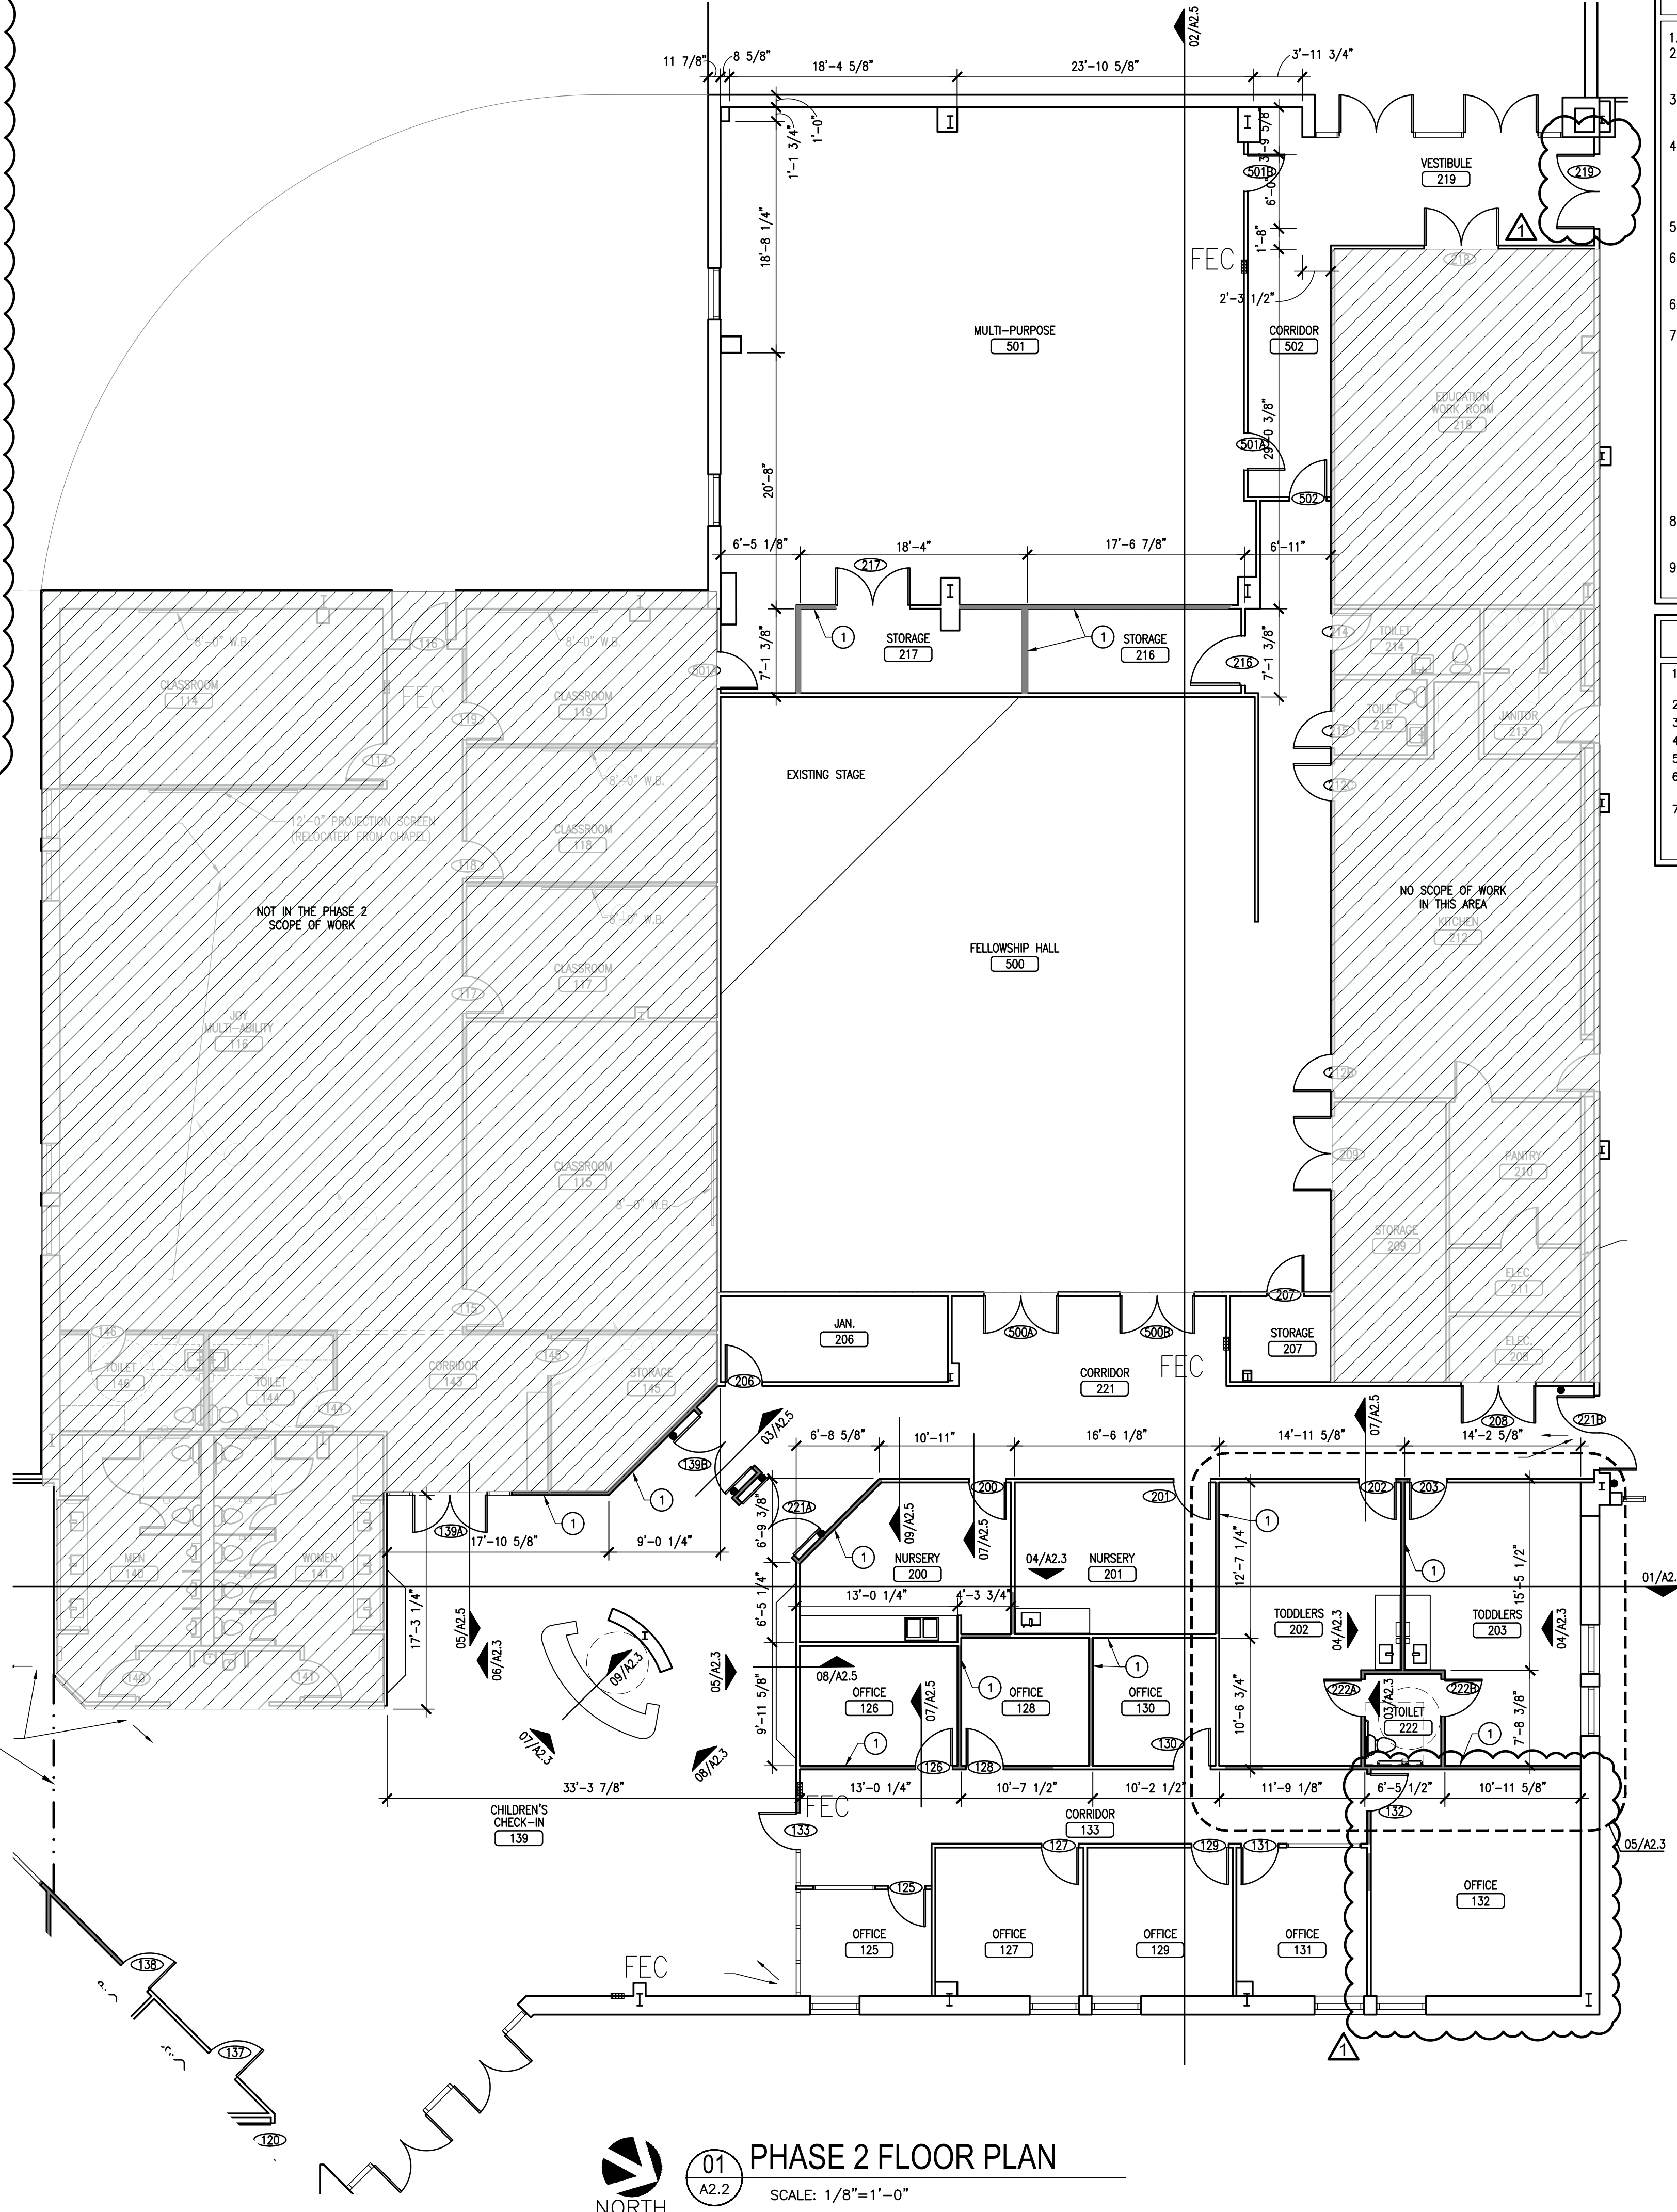

GENERAL FLOOR PLAN NOTES

1. REFER TO MEP DRAWINGS FOR MORE INFORMATION.
2. ALL DIMENSIONS ARE TO FACE OF STUD OR TO FACE OF MASONRY UNLESS NOTED OTHERWISE. MASONRY DIMENSIONS ARE NOMINAL UNLESS NOTED OTHERWISE.
3. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND INFORM THE OWNER AND ARCHITECT OF ANY CONFLICT PRIOR TO THE COMMENCEMENT OF WORK.
4. PROVIDE WOOD BLOCKING FOR ALL ITEMS OR EQUIPMENT FASTENING INTO DRYWALL PARTITIONS, TYPICAL FOR TV LOCATIONS, PROVIDE 12" HIGH X 16" WIDE BLOCKING W/ CENTER AT 60" A.F.F. FOR BEDSIDE TV'S PROVIDE BLOCKING AS RECOMMENDED BY MANUFACTURER.
5. ALL PUBLIC USE DOORS SHALL HAVE HC ACCESSIBLE CLEAR FLOOR SPACE. NOTIFY ARCHITECT OF ANY CONFLICT TO COMPLIANCE.
6. REFER TO SHEET G2.1 & G2.2 FOR ACCESSIBILITY REQUIREMENT INCLUDING CLEAR FLOOR SPACE, MOUNTING HEIGHTS, CABINET CLEARANCES, ETC... THAT MUST BE MAINTAINED.
7. SEAL ALL PENETRATIONS IN RATED ASSEMBLIES TO MAINTAIN THE REQUIRED RATINGS.
8. WHERE WALLS AND PARTITIONS ARE REQUIRED TO HAVE A 1 HOUR FIRE RATED ASSEMBLY, STEEL ELECTRICAL BOXES ON OPPOSITE SIDES OF THE WALL SHALL BE SEPARATED BY THE FOLLOWING:
 - A. BY HORIZONTAL DISTANCE OF NOT LESS THAN 24 INCHES.
 - B. BY SOLID FIRE BLOCKING IN ACCORDANCE WITH SECTION 717.2.1 OF 2018 INTERNATIONAL BUILDING CODE, WHICH STATES THAT FIRE BLOCKING MATERIALS SHALL CONSIST OF 2-INCH NOMINAL LUMBER.
 - C. BY PROTECTING BOTH OUTLET BOXES WITH LISTED PUTTY PADS.
9. FLOORING TRANSITIONS BETWEEN ROOMS SHALL OCCUR BENEATH DOORS IN THE CLOSED POSITIONS, TYP.

FLOOR PLAN NOTES BY NUMBER



1. NEW METAL FRAMED WALL. SEE WALL SECTIONS FOR ADDITIONAL INFORMATION.
2. NEW ALUMINUM FRAME AND GLASS PARTITION WALLS
3. NEW EXTERIOR INFILL WALL TO MATCH EXISTING..
4. RELOCATE EXISTING STOREFRONT DOOR & WINDOW UNITS.
5. EXTEND NEW & EXISTING WALLS FULL HEIGHT TO DECK.
6. REMOVE DOOR AND FRAME AND RE-INSTALL IN NEW WALL CONFIGURATION.
7. BABY TOILET BOWLS TO BE REVISED/ADDED TO TOILET ROOMS 309, 310, 311, & 312.

TOILET ACCESSORIES


- TA1 ENMOOTION PAPER TOWEL DISPENSER - WALL MOUNTED
 - TA2 TOILET TISSUE DISPENSER - DOUBLE ROLL
 - TA3 36" GRAB BAR
 - TA4 42" GRAB BAR
 - TA5 AUTOMATIC SOAP DISPENSER - DECK MOUNTED
 - TA6 SANITARY NAPKIN DISPOSAL UNIT
 - TA7 24" X 36" WALL MOUNTED MIRROR
 - TA8 SOAP DISPENSER - WALL MOUNTED
 - TA9 UNFRAMED MIRROR
- SPECIFIC ACCESSORIES LISTED IN SECTION 10 28 13

CLEAR FLOOR SPACE


- 1 60" TURNING DIAMETER
- 2 30" X 48" CLEAR FLOOR SPACE
- 3 60" X 56" CLEAR FLOOR SPACE
- 4 48" X 60" CLEAR FLOOR SPACE
- 5 36" X 48" CLEAR FLOOR SPACE
- 6 36" X 60" CLEAR FLOOR SPACE
- 7 42" X 58" CLEAR FLOOR SPACE
- 8 54" X 60" CLEAR FLOOR SPACE
- 9 48" X 48" CLEAR FLOOR SPACE
- 10 58" X 42" CLEAR FLOOR SPACE

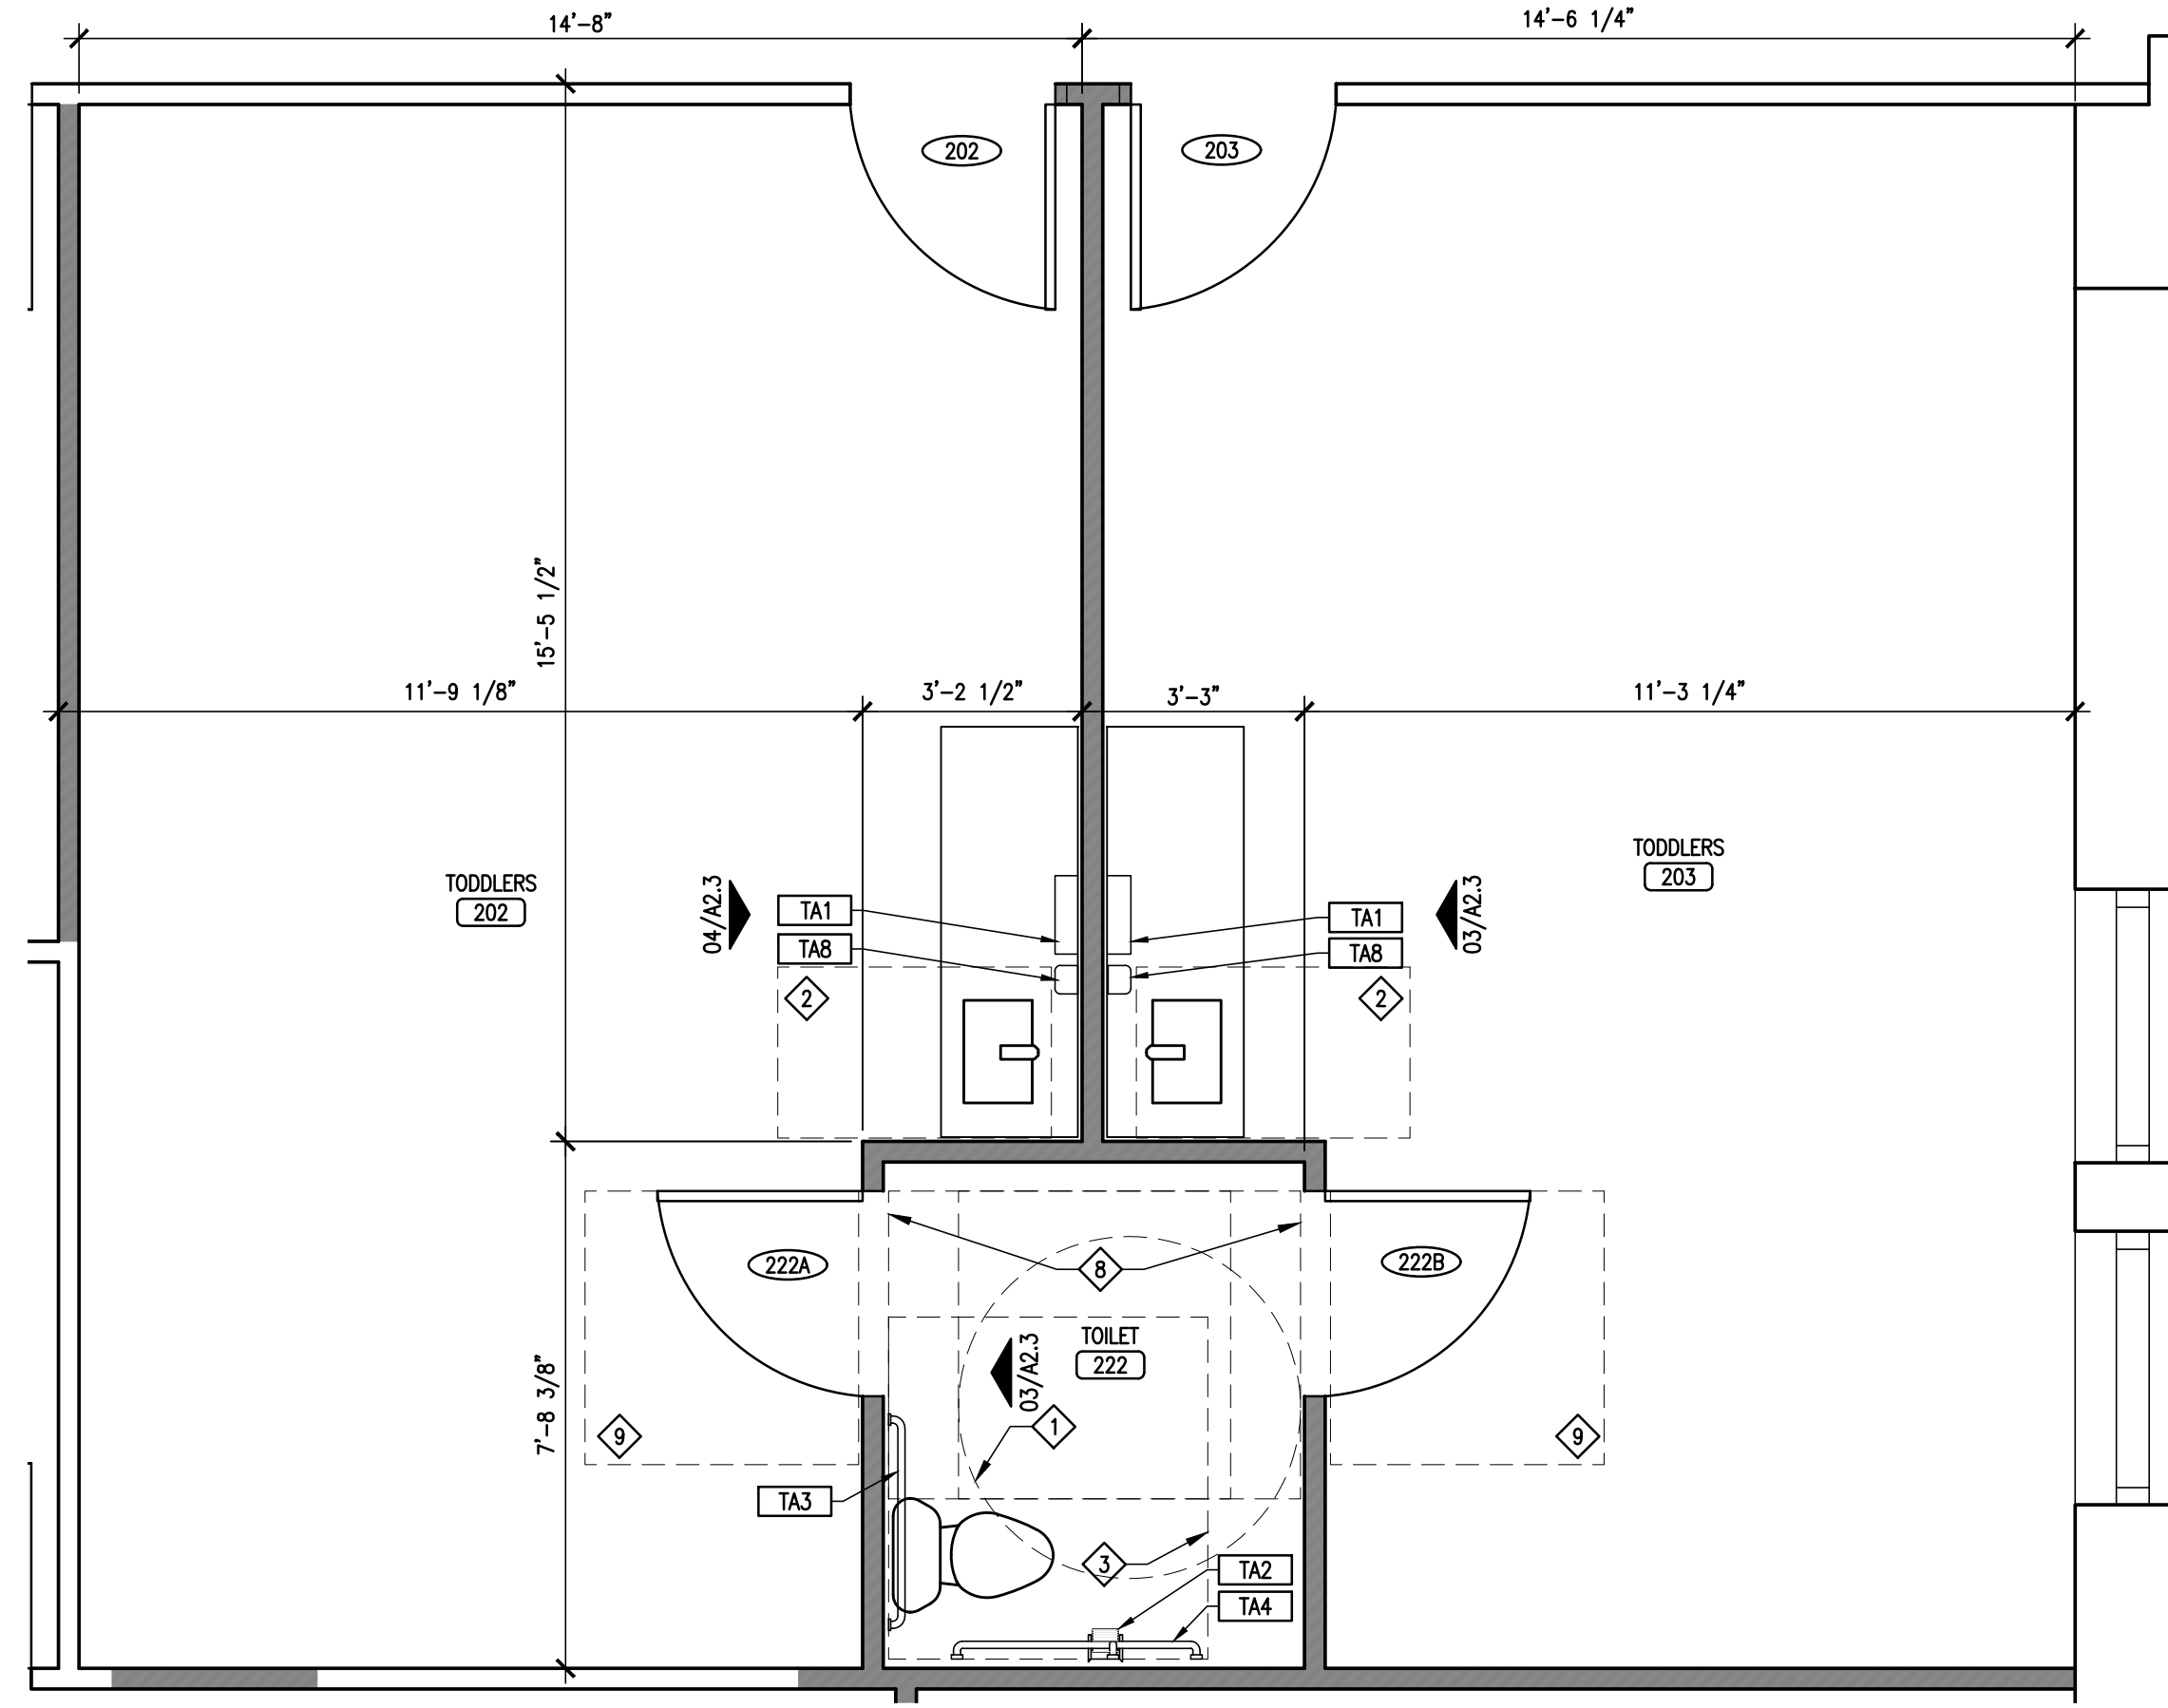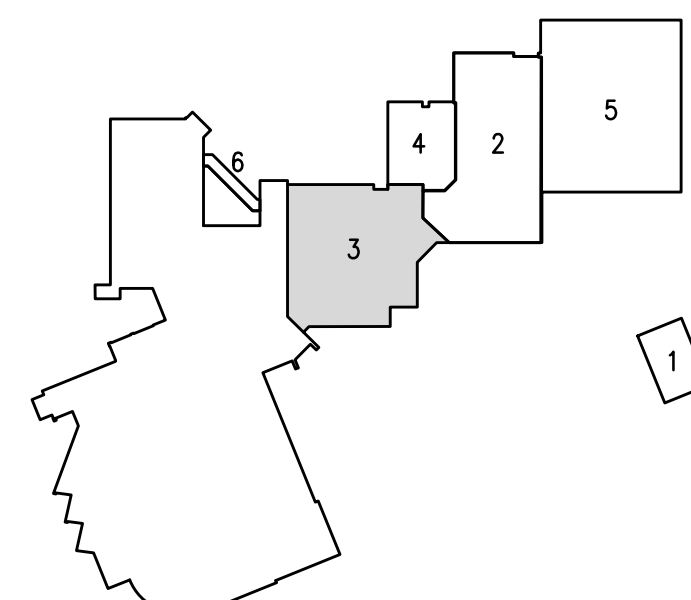


01 ENLARGED FLOOR PLAN
A2.3 SCALE: 3/8"=1'-0"

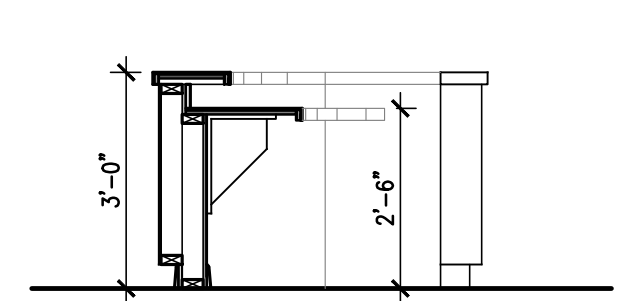


09 SECTION - RECEPTION DESK
A2.3 SCALE: 3/8"=1'-0"

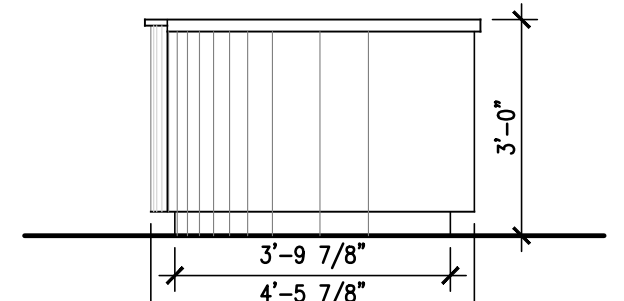


08 INT. ELEVATION - RECEPTION DESK
A2.3 SCALE: 3/8"=1'-0"

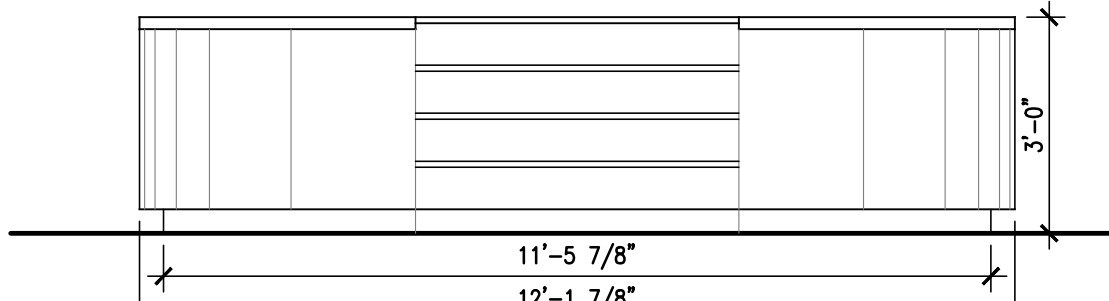


07 INT. ELEVATION - RECEPTION DESK
A2.3 SCALE: 3/8"=1'-0"

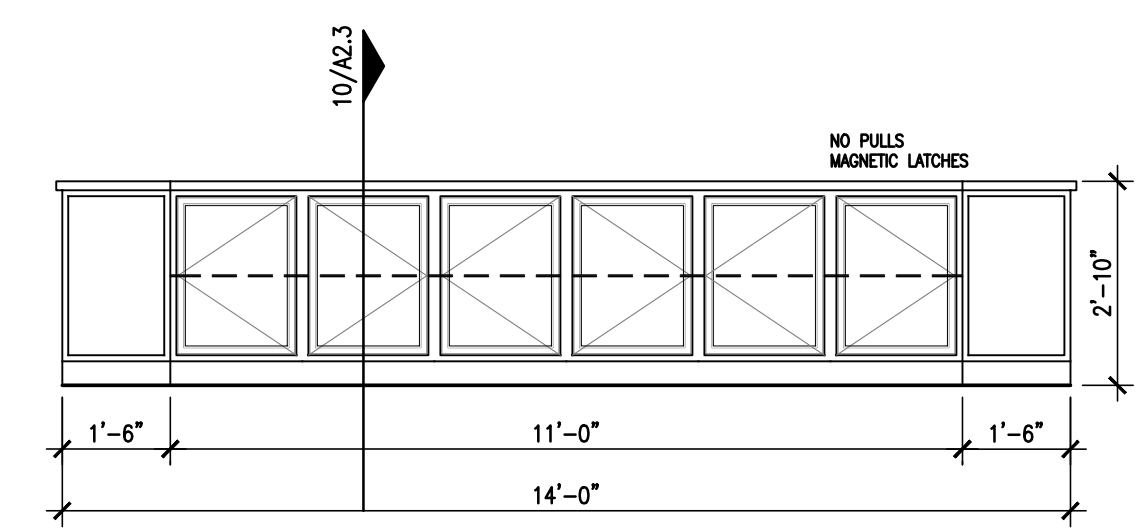


05 INT. ELEVATION - CABINETS
A2.3 SCALE: 3/8"=1'-0"

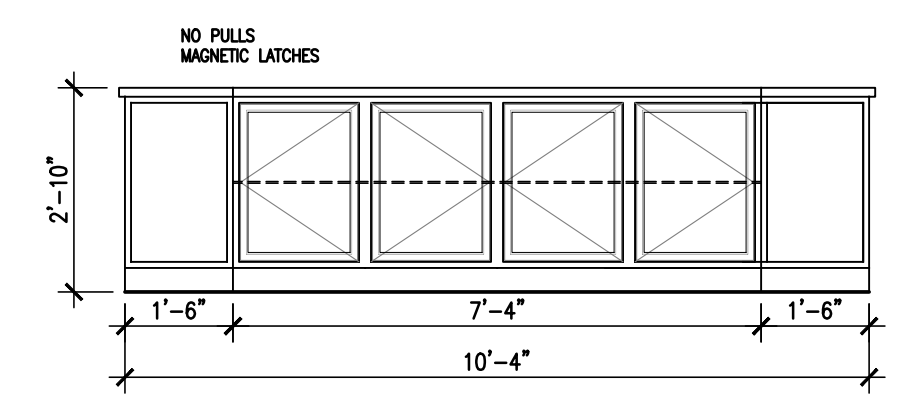


06 INT. ELEVATION - CABINETS
A2.3 SCALE: 3/8"=1'-0"

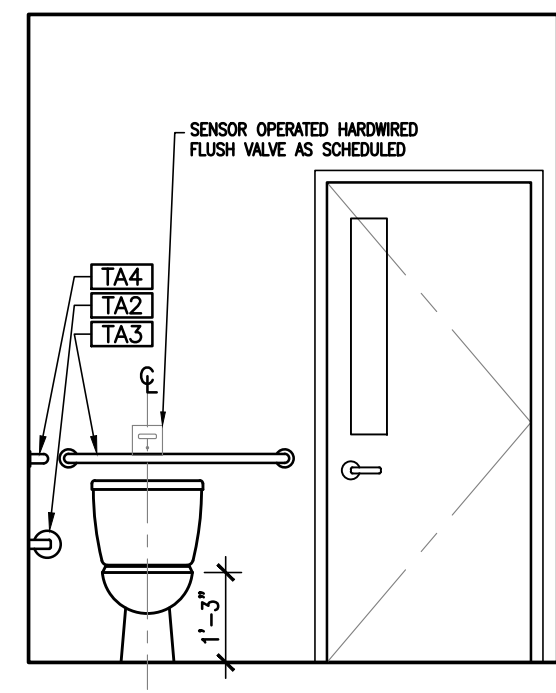


03 INT. ELEVATION - TOILET
A2.3 SCALE: 3/8"=1'-0"

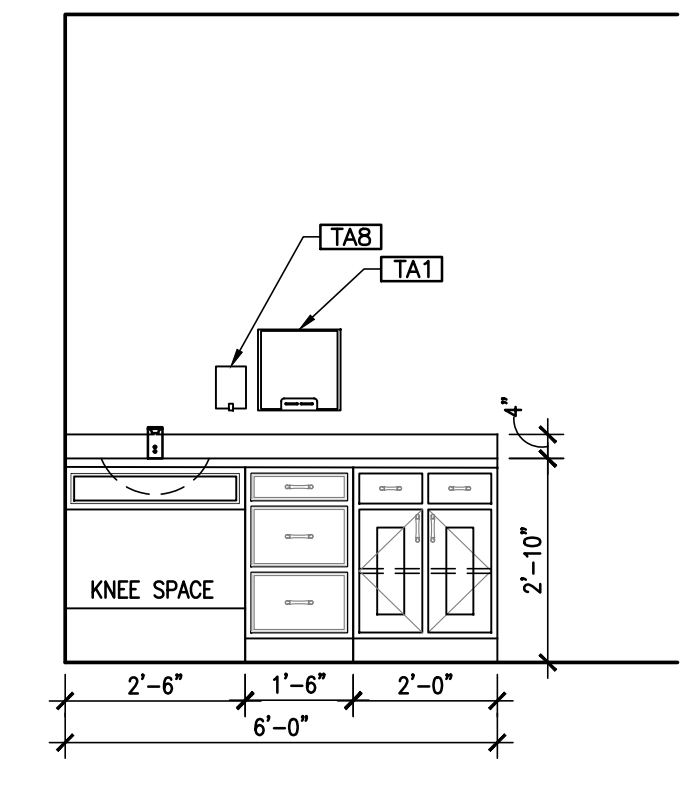


04 INT. ELEVATION
A2.3 SCALE: 3/8"=1'-0"

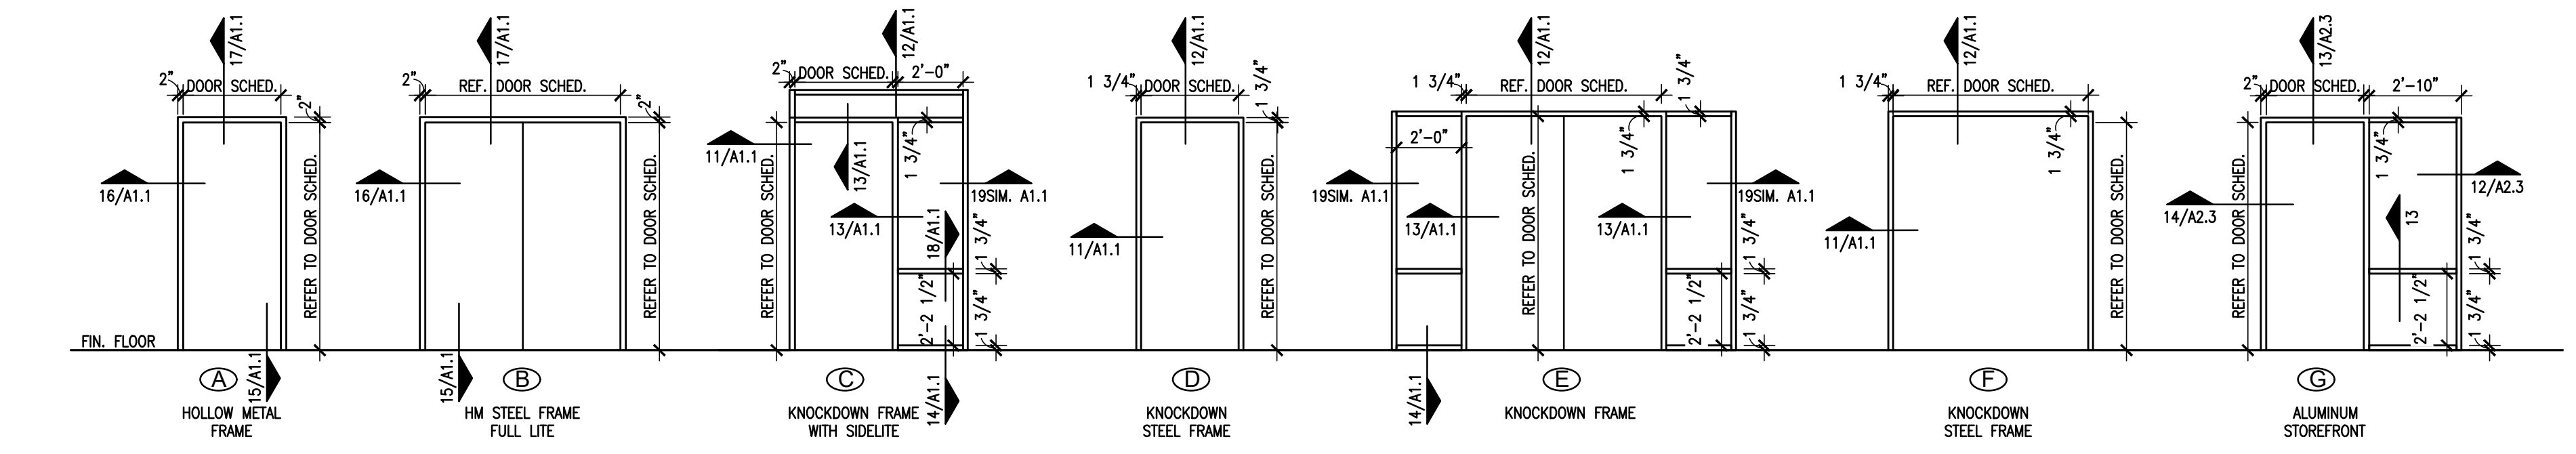


15 DOOR AND FRAME TYPES
A2.3 SCALE: 1/4"=1'-0"

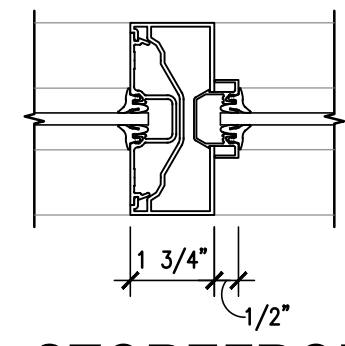


13 DETAIL - STOREFRONT JAMB IN SIDELITE
A2.3 SCALE: 3"=1'-0"

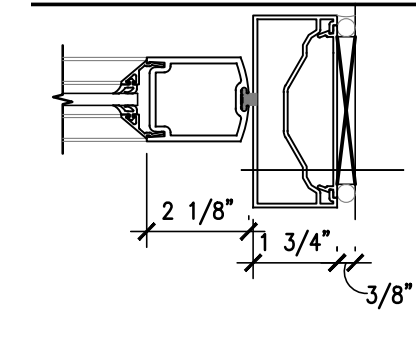

14 DETAIL - STOREFRONT JAMB
A2.3 SCALE: 3"=1'-0"

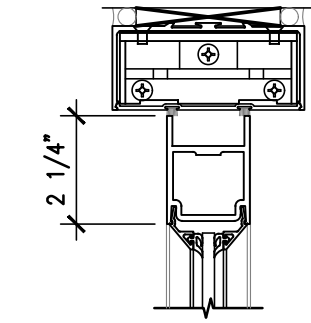


11 DETAIL - CENTER HUNG HEADER FOR CONCEALED CLOSER
A2.3 SCALE: 3"=1'-0"

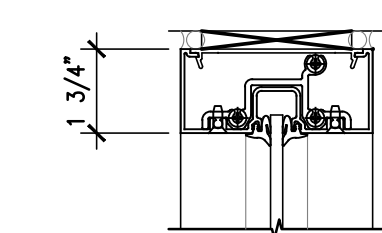

12 DETAIL - SIDELITE HEAD
A2.3 SCALE: 3"=1'-0"

TOILET ACCESSORIES	
TA1	ENMOTION PAPER TOWEL DISPENSER - WALL MOUNTED
TA2	TOILET TISSUE DISPENSER - DOUBLE ROLL
TA3	36" GRAB BAR
TA4	42" GRAB BAR
TA5	AUTOMATIC SOAP DISPENSER - DECK MOUNTED
TA6	SANITARY NAPKIN DISPOSAL UNIT
TA7	24" X 36" WALL MOUNTED MIRROR
TA8	SOAP DISPENSER - WALL MOUNTED
TA9	UNFRAMED MIRROR
SPECIFIC ACCESSORIES LISTED IN SECTION 10 28 13	

CLEAR FLOOR SPACE	
1	60" TURNING DIAMETER
2	30" x 48" CLEAR FLOOR SPACE
3	60" x 56" CLEAR FLOOR SPACE
4	48" x 60" CLEAR FLOOR SPACE
5	36" x 48" CLEAR FLOOR SPACE
6	36" x 60" CLEAR FLOOR SPACE
7	42" x 58" CLEAR FLOOR SPACE
8	54" x 60" CLEAR FLOOR SPACE
9	48" x 48" CLEAR FLOOR SPACE
10	58" x 42" CLEAR FLOOR SPACE

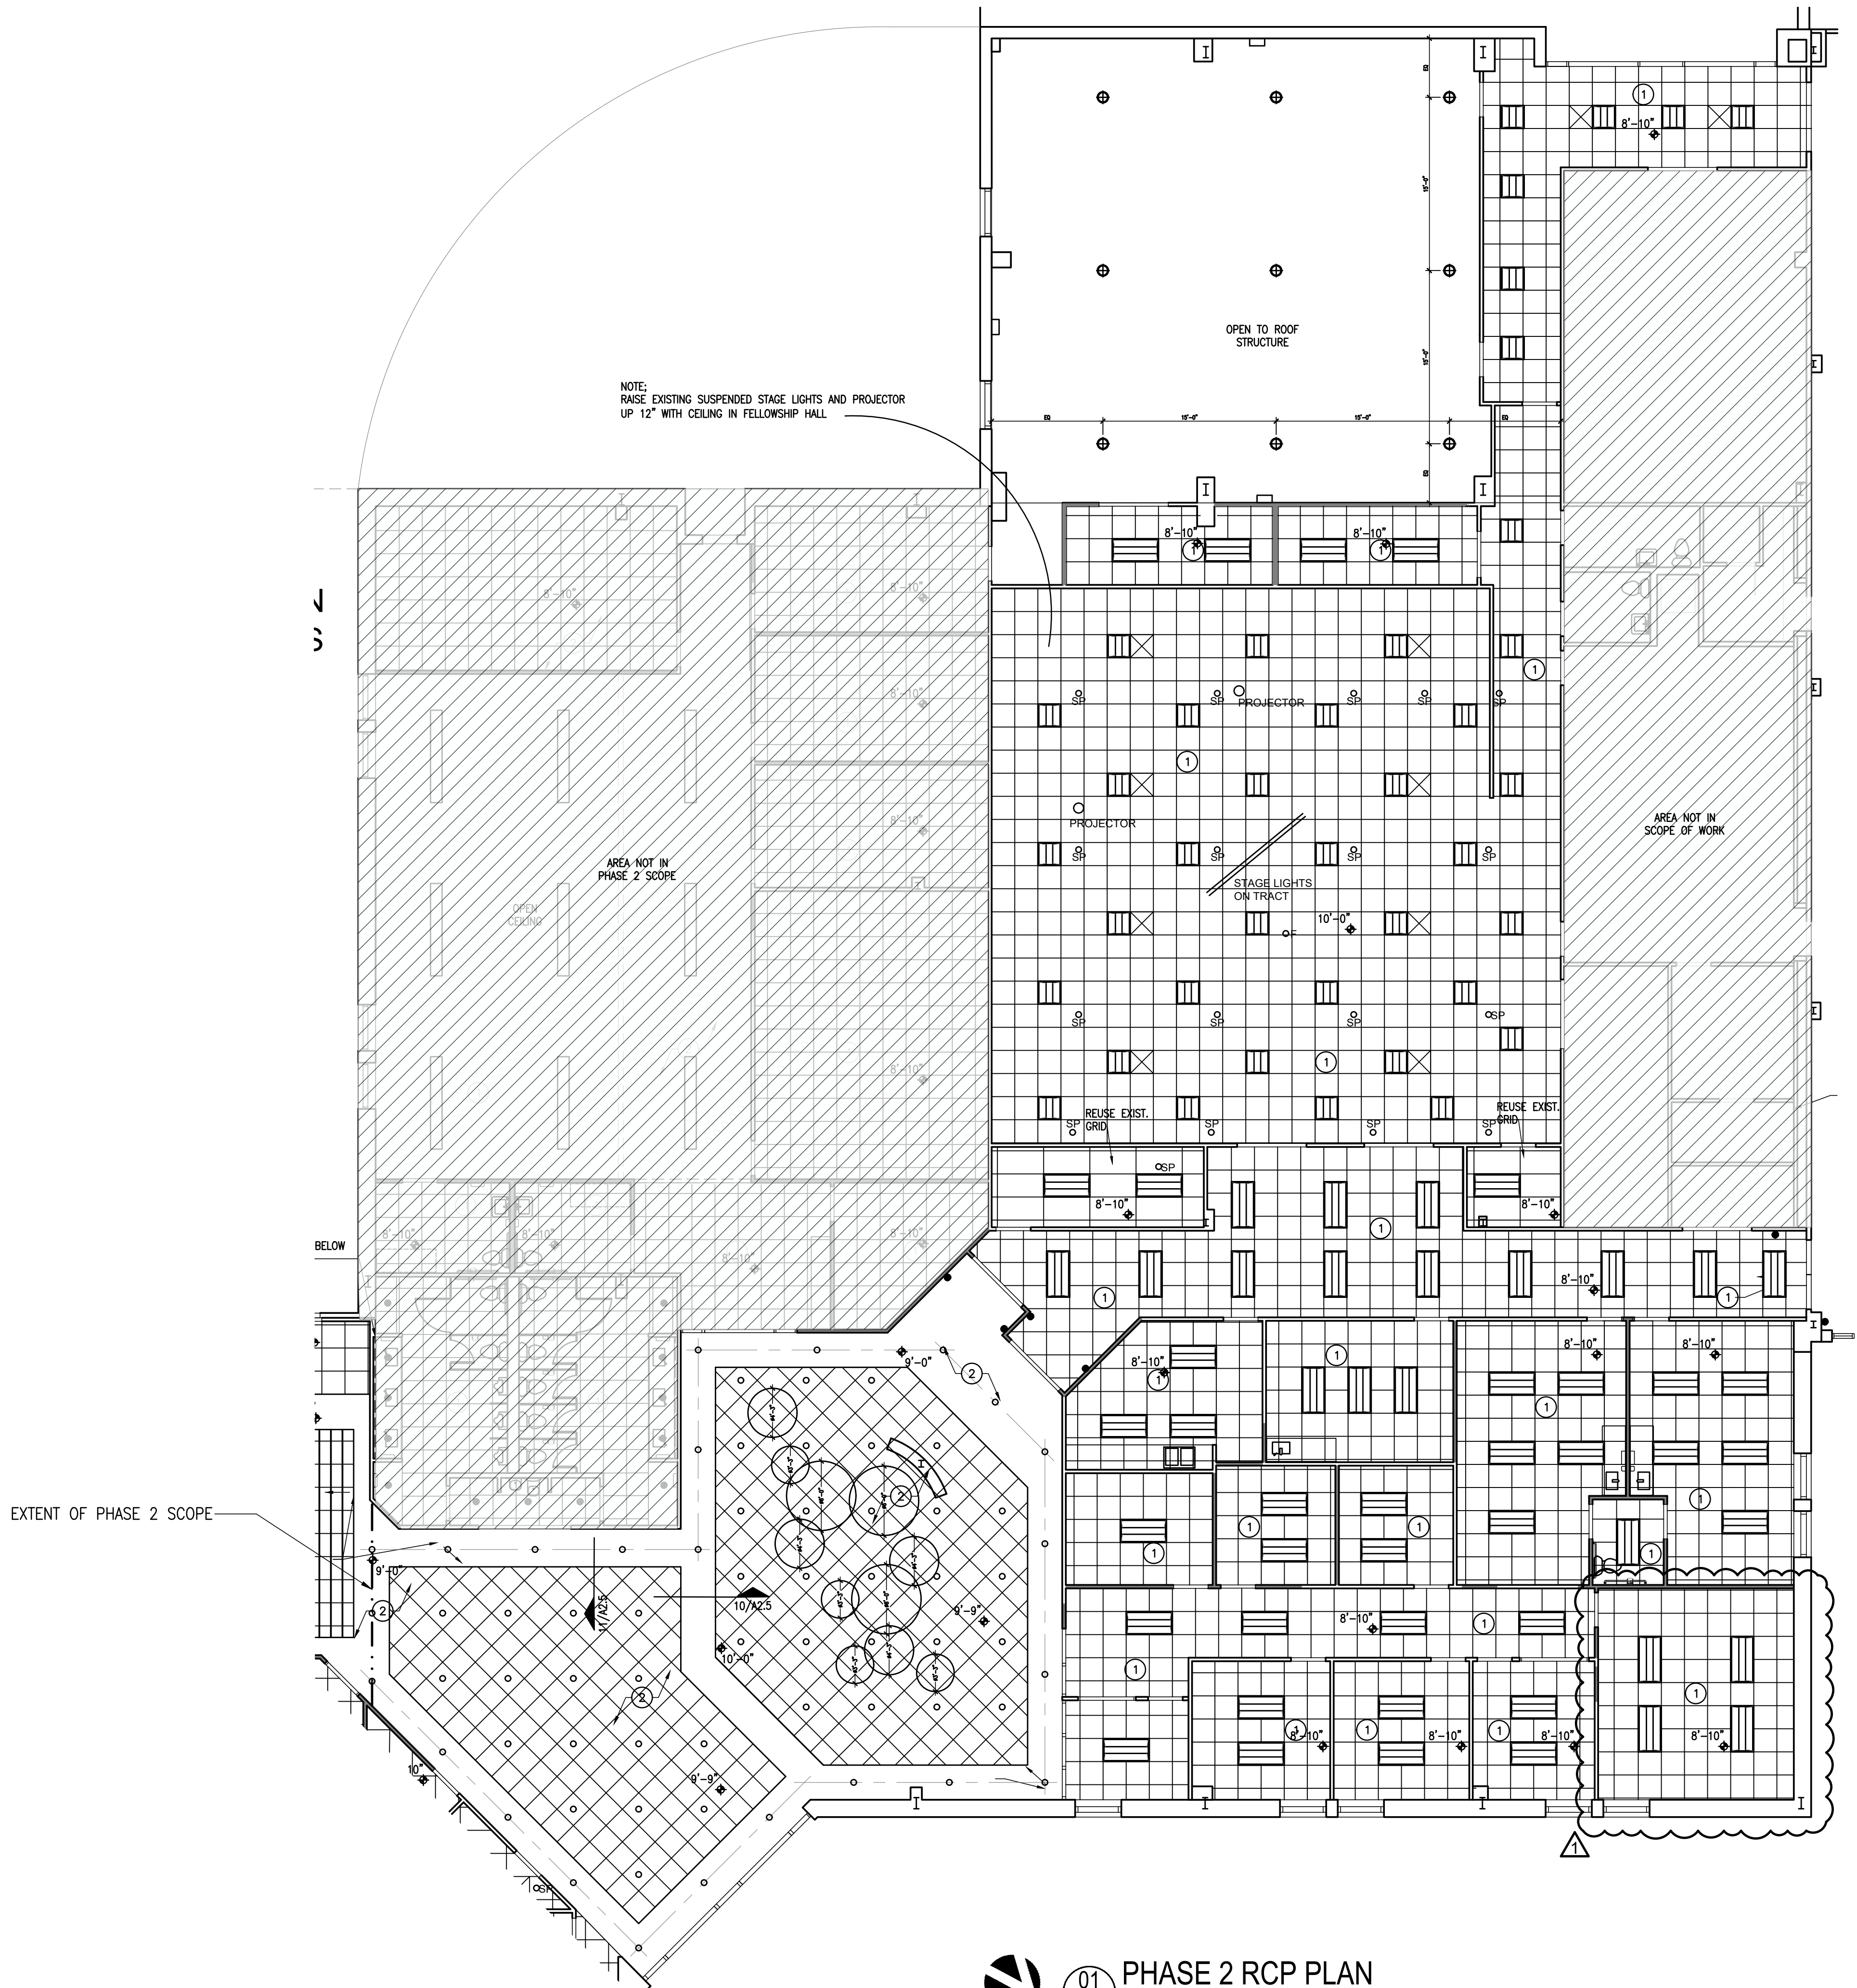

- GENERAL RCP NOTES
- A. ALL 1 HOUR PARTITION WALLS SHALL TERMINATE TO THE BOTTOM OF THE 1-HOUR ROOF/CEILING ASSEMBLY.

B. ALL PENETRATIONS THROUGH RATED WALLS SHALL BE FIRE-STOPPED AS REQUIRED TO MAINTAIN WALL RATING.

C. COORDINATE LIGHT FIXTURE LOCATIONS WITH DOORS, MECHANICAL EQUIPMENT AND FIRE SPRINKLERS. NOTIFY THE ARCHITECT IF THERE IS A DISCREPANCY.

D. RELOCATE EXISTING HVAC AIR DEVICES AS REQUIRED. EXTEND OR OTHERWISE MODIFY DUCTWORK TO MAINTAIN PROPER PERFORMANCE OF THE SYSTEM.

E. RELOCATE FIRE SUPPRESSION SPRINKLER HEADS AS REQUIRED. EXTEND OR MODIFY PIPING AS REQUIRED TO RESULT IN A CODE COMPLIANT SYSTEM. THE SPRINKLER CONTRACTOR SHALL PROVIDE ENGINEERED DESIGN AND SUBMIT TO THE CITY FOR APPROVAL.

- RCP LEGEND
- 2x4 LAY-IN TROFFER LED LIGHT FIXTURE

2x2 LAY-IN TROFFER LED LIGHT FIXTURE

SURFACE MOUNT LED LIGHT FIXTURE

WALL PACK

SCONCE WALL MOUNT FIXTURE

PENDANT WALL MOUNT FIXTURE

LED COVE STRIP LIGHT

WALL MOUNTED LIGHT FIXTURE

PENDANT LIGHT/ CHANDELIER

RECESSED DOWNLIGHT FIXTURE

EXIT LIGHT

SUSPENDED CEILING

AREA NOT AFFECTED DURING THIS PHASE

- RCP NOTES BY NUMBER (#)
1. 2x2 A.C.T SUSPENDED CEILING W/ 6" R-19 FIBERGLASS INSULATION OVER.

2. NEW 1-HR FIRE RATED GYPSUM BOARD CEILING, GA FILE NO. RG-2601. RE: RCP AND DETAILS.

3. EXISTING CEILING AND LIGHTING TO REMAIN.

4. REPLACE FABRIC ON EXISTING METAL AWNING STRUCTURE.

5. LIGHT COVE WITH LED COVE STRIP LIGHT.


6. CEILING OPEN TO DECK.

7. PENDANT LIGHTING SUSPENDED FROM ROOF STRUCTURE.

8. DECORATIVE RECESSED WOOD RAFTERS/BEAMS.


9. SUSPENDED LINEAR LIGHT FIXTURE.

10. EXISTING LIGHTING FIXTURE TO REMAIN.

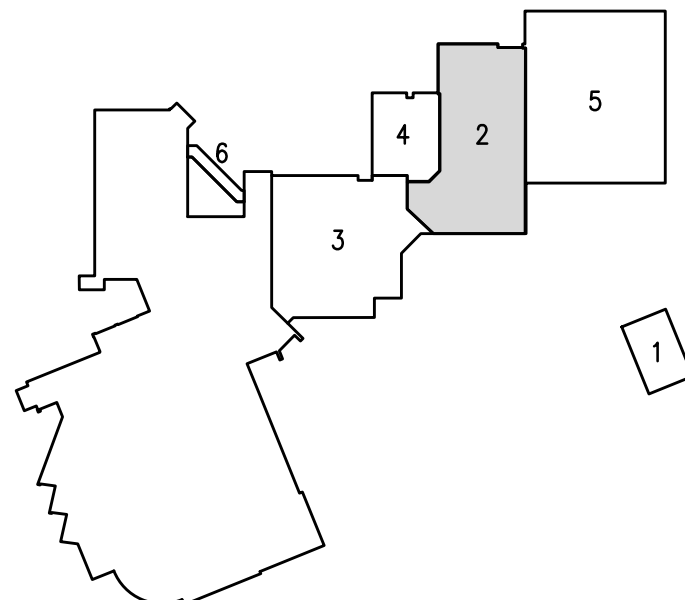

NORTH

PHASING/
KEY PLAN

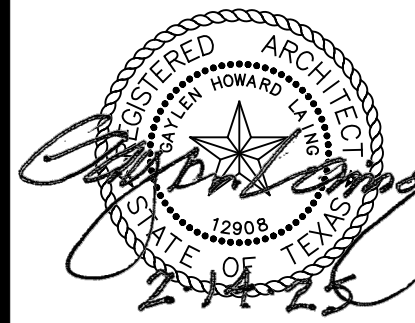

DATE: 08/14/24

ISSUE:
-
-

REVISION:
Δ REVISED 04-30-25
-
-

SHEET TITLE:

PHASE 2
REFLECTED
CEILING PLAN

A2.4

PROSTUD FULL COMPOSITE					
LIMITING HEIGHTS					
5/8" TYPE X GYPSUM					
WIDTH	STUD MEMBER	DESIGN THICKNESS (IN)	YIELD STRENGTH (KSL)	SPACING (IN)	LATORAL LOAD - 5 PSF
3-5/8"	PROSTUB 25 362PDS125-15	0.0158	50	12	17'-1"
				16	15'-6"
				24	13'-6"
	PROSTUD 20 362PDS125-18	0.0190	70	12	18'-2"
				16	16'-10"
				24	15'-1"
	PROSTUD 30 362PDS125-30	0.0312	33	12	20'-5"
				16	18'-6"
				24	16'-2"
	PROSTUD 33 362PDS125-33	0.0346	33	12	21'-2"
				16	19'-2"
				24	16'-9"

PROSTUD NON-COMPOSITE					
LIMITING HEIGHTS					
5/8" TYPE X GYPSUM					
WIDTH	STUD MEMBER	DESIGN THICKNESS (IN)	YIELD STRENGTH (KSL)	SPACING (IN)	LATORAL LOAD - 5 PSF
3-5/8"	PROSTUB 25 362PDS125-15	0.0158	50	12	12'-5"
				16	10'-9"
				24	8'-9"
	PROSTUD 20 362PDS125-18	0.0190	70	12	14'-6"
				16	13'-2"
				24	10'-9"
	PROSTUD 30 362PDS125-30	0.0312	33	12	17'-4"
				16	15'-9"
				24	13'-9"
	PROSTUD 33 362PDS125-33	0.0346	33	12	17'-11"
				16	16'-3"
				24	14'-3"

09 WALL SECTION
A2.5 SCALE: 1/2"=1'-0"

08 WALL SECTION
A2.5 SCALE: 1/2"=1'-0"

07 WALL SECTION
A2.5 SCALE: 1/2"=1'-0"

11 WALL SECTION
A2.5 SCALE: 1-1/2"=1'-0"

10 WALL SECTION
A2.5 SCALE: 1-1/2"=1'-0"

06 WALL SECTION
A2.5 SCALE: 1/2"=1'-0"


05 WALL SECTION
A2.5 SCALE: 1/2"=1'-0"

04 WALL SECTION
A2.5 SCALE: 1/2"=1'-0"

03 WALL SECTION
A2.5 SCALE: 1/2"=1'-0"

02 PHASE 2 BUILDING SECTION
A2.5 SCALE: 3/16"=1'-0"

01 PHASE 2 BUILDING SECTION
A2.5 SCALE: 3/16"=1'-0"

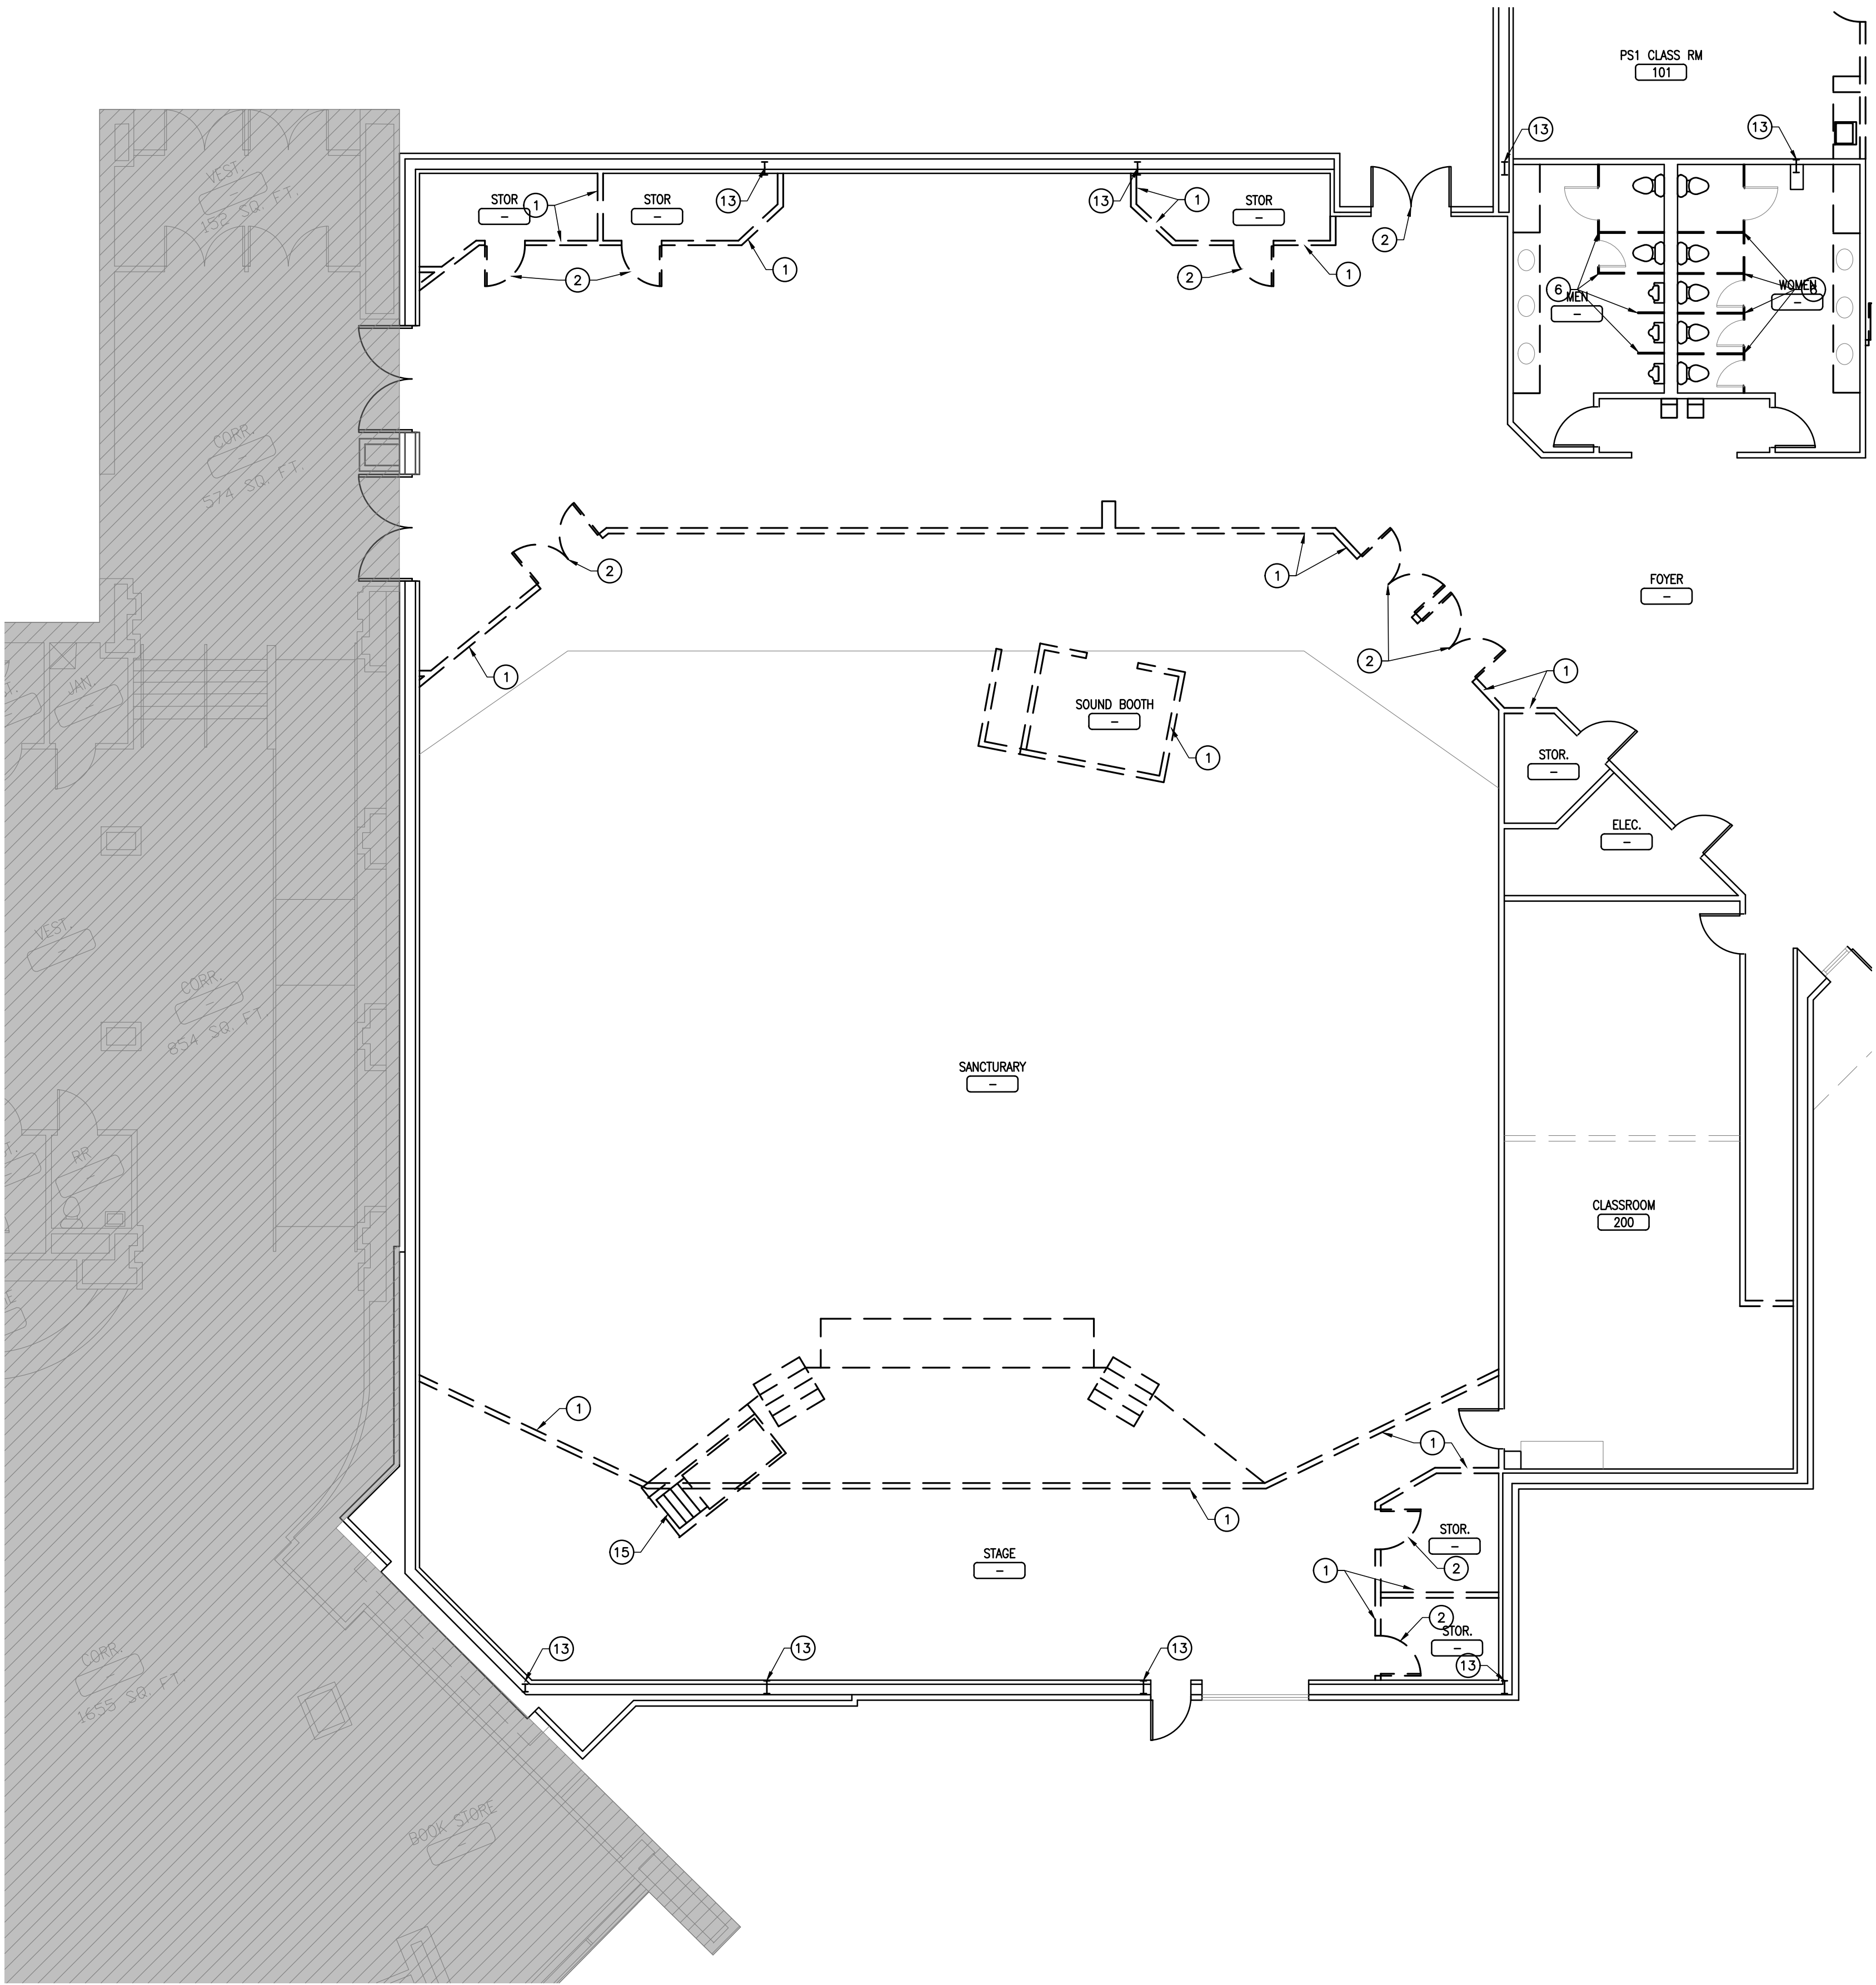

GENERAL DEMOLITION NOTES


1. REMOVE BUILDING ELEMENTS AS INDICATED AND TO THE EXTENT NECESSARY TO ACCOMPLISH THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. ELECTRICAL AND PLUMBING FIXTURES AND DEVICES REMOVED DURING DEMOLITION SHALL INCLUDE THE REMOVAL OF ALL ASSOCIATED WIRES, CONDUIT, AND LINES IN THEIR ENTIRETY BACK TO THE SOURCE OR TO UNDER A POINT OUT OF CONFLICT WITH THE NEW WORK AND OUT OF SIGHT.
2. ALL MATERIALS, FIXTURES, ETC. INDICATED TO BE REMOVED SHALL BE DISPOSED OF PROPERLY OFF SITE BY THE CONTRACTOR UNLESS NOTED OTHERWISE.
3. REMOVE BUILDING ELEMENTS IN SUCH A MANNER TO FACILITATE THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. PREPARE ALL SURFACES TO RECEIVE NEW FINISH AS SCHEDULED.
4. CONTRACTOR TO DETERMINE LOAD BEARING WALLS PRIOR TO DEMOLITION. RESHORE AS NECESSARY DURING ALL PHASES OF WORK.
5. COORDINATE WITH FACILITIES MANAGEMENT FOR REMOVAL, STORAGE, AND RELOCATION OF FACILITY FURNITURE, FIXTURES, AND EQUIPMENT DURING CONSTRUCTION.
6. PROTECT EXISTING CONSTRUCTION TO REMAIN FROM DEMOLITION PROCESS INCLUDING DUST AND DAMAGE CAUSED BY FOOT TRAFFIC.
7. PATCH AND REPAIR ALL EXISTING WALLS AND CEILINGS TO REMAIN WITH TEXTURE TO MATCH EXISTING. PREPARE SURFACES FOR NEW PAINT.
8. DOORS, FRAMES AND HARDWARE REMOVED DURING DEMOLITION SHALL BE SALVAGED FOR REUSE. COORDINATE WITH NEW DOOR SCHEDULE REQUIREMENTS, REFURBISH EXISTING DOORS AND FRAMES REUSED.
9. LIGHT FIXTURES AND CEILING MOUNTED DEVICES AND EQUIPMENT SHALL BE REMOVED OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY. REF. REFLECTED CEILING PLAN AND MEP FOR FULL SCOPE OF NEW CONSTRUCTION.
10. MECHANICAL AIR DIFFUSER/RETURN TO BE RELOCATED OR REMOVED TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY.
11. FIRE SPRINKLERS AND ALARMS SHALL BE MODIFIED AND/OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUTS. CONTRACTOR TO FIELD VERIFY.
12. REMOVE ALL FLOORING THROUGHOUT, U.O.N. FLOORING INCLUDES CARPET, WOOD FLOORING, VCT AND SHEET VINYL. WALL BASE INCLUDES WOOD BASE, VINYL BASE AND CARPET BASE.
13. PER STATE LAW, AN ASBESTOS SURVEY MUST BE PERFORMED AND ANY MATERIAL FOUND TO BE AFFECTED BY CONSTRUCTION THAT ASBESTOS MUST BE PROPERLY ABATED.
14. ITEMS TO BE REMOVED OR DEMOLISHED SHOWN DASHED AND BOLD.

DEMOLITION NOTES BY NUMBERS ○

1. REMOVE EXISTING WALL (DASHED).
2. REMOVE AND COORDINATE THE REUSE OF DOOR FRAME AND HARDWARE IN NEW LOCATION.
3. REMOVE EXISTING CABINETRY.
4. REMOVE EXISTING WINDOW.
5. REMOVE EXISTING LIGHT FIXTURE(S).
6. REMOVE EXISTING PLUMBING FIXTURE.
7. REMOVE EXISTING LAY-IN CEILING.
8. EXISTING CEILING AND LIGHTING TO REMAIN.
9. REMOVE EXISTING TOILET PARTITIONS.
10. REMOVE EXISTING CARPET AND/OR VINYL FLOORING.
11. REMOVE AND RELOCATE EXISTING PAPER TOWEL DISPENSER.
12. REMOVE AND COORDINATE THE REUSE OF 2x2 A.C.T. CEILING.
13. STRUCTURAL COLUMN, PROTECT DURING CONSTRUCTION.
14. REMOVE WALL TO CREATE OPENING FOR NEW EXTERIOR DOOR AND FRAME.
15. REMOVE BAPTISTERY.
16. REMOVE ROLLING COUNTER SHUTTER.
17. REMOVE PORTION OF CONCRETE SLAB FOR NEW PLUMBING.
18. DISMANTLE AND REMOVE PORTABLE DESK.
19. REMOVE EXISTING STEEL DOOR(S) AND FRAME.
20. EXISTING CONCRETE BASE TO BE REMOVED AND REPLACED
21. CONDENSING UNIT TO BE REMOVED AND RELOCATED.
22. REMOVE AND COORDINATE THE REUSE OF BABY TOILET BOWLS.
23. PROTECT AND PRESERVE WALL MURAL DURING DEMOLITION AND CONSTRUCTION.

DEMOLITION LEGEND

- | | |
|--|--|
| | EXISTING TO REMAIN |
| | TO BE DEMOLISHED/ REMOVED |
| | NO DEMOLITION SCOPE WITHIN THIS AREA IN THIS PHASE |

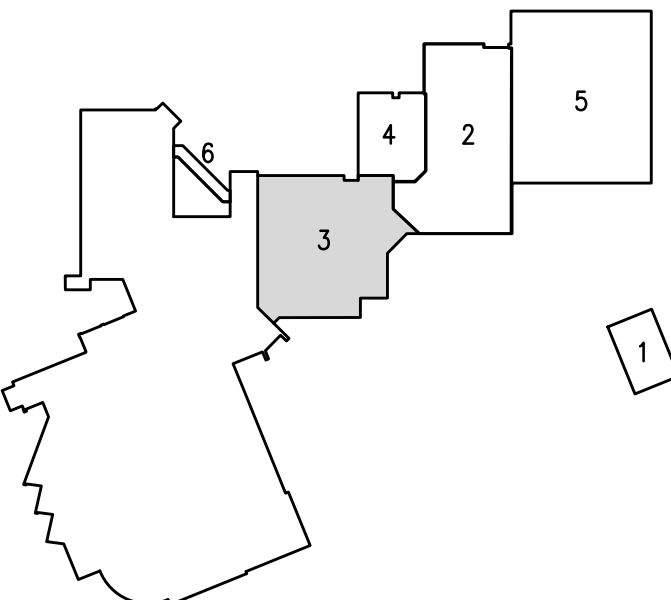


01 PHASE 3 DEMO FLOOR PLAN
A3.0 SCALE: 1/8"=1'-0"

ARCHITECTURE
PLANNING
INTERIOR DESIGN

GHILA

NORTHWOOD CHURCH
RENOVATIONS

1870 RUFE SNOW DR.
KELLER, TEXAS 76248

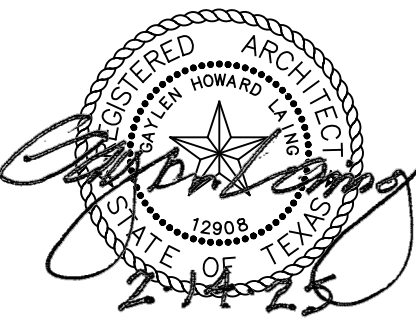

DATE: 08/14/24

ISSUE:

REVISION:


△ REVISED 04-30-25

SHEET TITLE:

PHASE 3 DEMO
FLOOR PLAN

A3.0

1300 WEST RANDOL MILL ROAD, ARLINGTON, TEXAS 76012
817.801.7200
www.ghila-inc.com

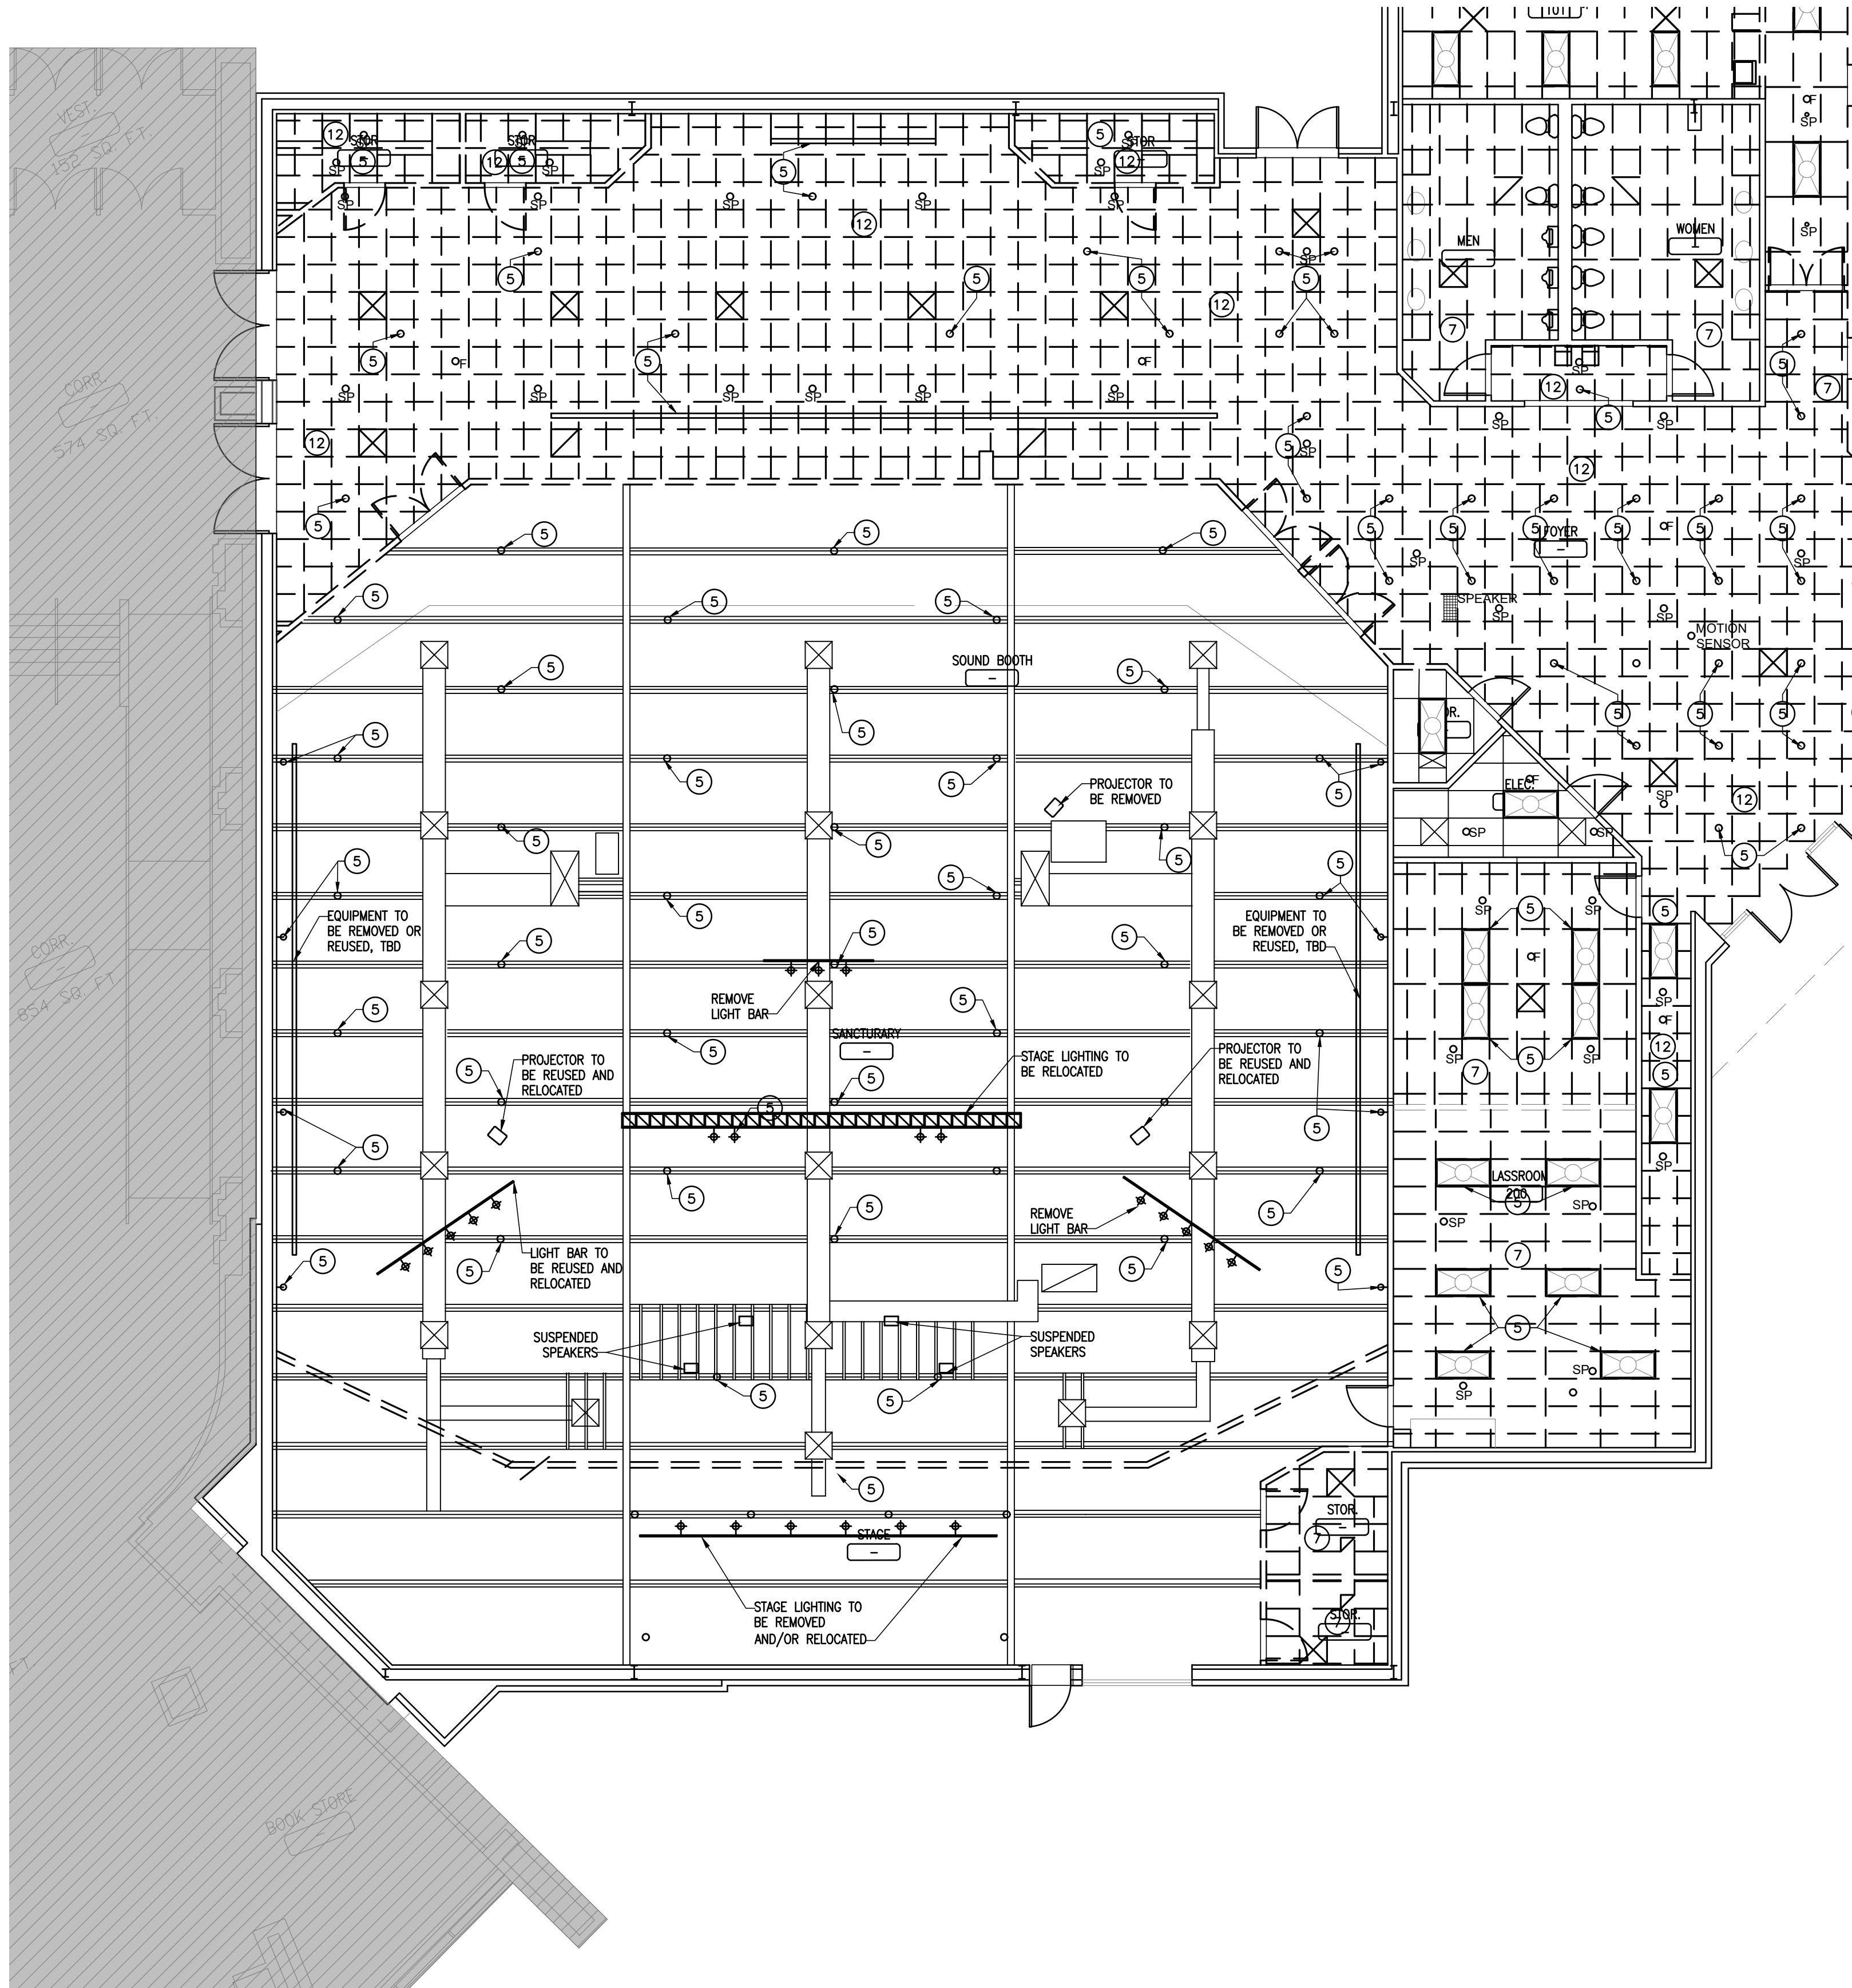

GENERAL DEMOLITION NOTES


1. REMOVE BUILDING ELEMENTS AS INDICATED AND TO THE EXTENT NECESSARY TO ACCOMPLISH THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. ELECTRICAL AND PLUMBING FIXTURES AND DEVICES REMOVED DURING DEMOLITION SHALL INCLUDE THE REMOVAL OF ALL ASSOCIATED WIRES, CONDUIT, AND LINES IN THEIR ENTIRETY BACK TO THE SOURCE OR TO UNDER A POINT OUT OF CONFLICT WITH THE NEW WORK AND OUT OF SIGHT.
2. ALL MATERIALS, FIXTURES, ETC. INDICATED TO BE REMOVED SHALL BE DISPOSED OF PROPERLY OFF SITE BY THE CONTRACTOR UNLESS NOTED OTHERWISE.
3. REMOVE BUILDING ELEMENTS IN SUCH A MANNER TO FACILITATE THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. PREPARE ALL SURFACES TO RECEIVE NEW FINISH AS SCHEDULED.
4. CONTRACTOR TO DETERMINE LOAD BEARING WALLS PRIOR TO DEMOLITION. RESHORE AS NECESSARY DURING ALL PHASES OF WORK.
5. COORDINATE WITH FACILITIES MANAGEMENT FOR REMOVAL, STORAGE, AND RELOCATION OF FACILITY FURNITURE, FIXTURES, AND EQUIPMENT DURING CONSTRUCTION.
6. PROTECT EXISTING CONSTRUCTION TO REMAIN FROM DEMOLITION PROCESS INCLUDING DUST AND DAMAGE CAUSED BY FOOT TRAFFIC.
7. PATCH AND REPAIR ALL EXISTING WALLS AND CEILINGS TO REMAIN WITH TEXTURE TO MATCH EXISTING. PREPARE SURFACES FOR NEW PAINT.
8. DOORS, FRAMES AND HARDWARE REMOVED DURING DEMOLITION SHALL BE SALVAGED FOR REUSE. COORDINATE WITH NEW DOOR SCHEDULE REQUIREMENTS, REFURBISH EXISTING DOORS AND FRAMES REUSED.
9. LIGHT FIXTURES AND CEILING MOUNTED DEVICES AND EQUIPMENT SHALL BE REMOVED OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY. REF. REFLECTED CEILING PLAN AND MEP FOR FULL SCOPE OF NEW CONSTRUCTION.
10. MECHANICAL AIR DIFFUSER/RETURN TO BE RELOCATED OR REMOVED TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY.
11. FIRE SPRINKLERS AND ALARMS SHALL BE MODIFIED AND/OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUTS. CONTRACTOR TO FIELD VERIFY.
12. REMOVE ALL FLOORING THROUGHOUT, U.O.N. FLOORING INCLUDES CARPET, WOOD FLOORING, VCT AND SHEET VINYL. WALL BASE INCLUDES WOOD BASE, VINYL BASE AND CARPET BASE.
13. PER STATE LAW, AN ASBESTOS SURVEY MUST BE PERFORMED AND ANY MATERIAL FOUND TO BE AFFECTED BY CONSTRUCTION THAT ASBESTOS MUST BE PROPERLY ABATED.
14. ITEMS TO BE REMOVED OR DEMOLISHED SHOWN DASHED AND BOLD.

DEMOLITION NOTES BY NUMBERS ○

1. REMOVE EXISTING WALL (DASHED).
2. REMOVE AND COORDINATE THE REUSE OF DOOR FRAME AND HARDWARE IN NEW LOCATION.
3. REMOVE EXISTING CABINETRY.
4. REMOVE EXISTING WINDOW.
5. REMOVE EXISTING LIGHT FIXTURE(S).
6. REMOVE EXISTING PLUMBING FIXTURE.
7. REMOVE EXISTING LAY-IN CEILING.
8. EXISTING CEILING AND LIGHTING TO REMAIN.
9. REMOVE EXISTING TOILET PARTITIONS.
10. REMOVE EXISTING CARPET AND/OR VINYL FLOORING.
11. REMOVE AND RELOCATE EXISTING PAPER TOWEL DISPENSER.
12. REMOVE AND COORDINATE THE REUSE OF 2x2 A.C.T. CEILING.
13. STRUCTURAL COLUMN, PROTECT DURING CONSTRUCTION.
14. REMOVE WALL TO CREATE OPENING FOR NEW EXTERIOR DOOR AND FRAME.
15. REMOVE BAPTISTERY.
16. REMOVE ROLLING COUNTER SHUTTER.
17. REMOVE PORTION OF CONCRETE SLAB FOR NEW PLUMBING.
18. DISMANTLE AND REMOVE PORTABLE DESK.
19. REMOVE EXISTING STEEL DOOR(S) AND FRAME.
20. EXISTING CONCRETE BASE TO BE REMOVED AND REPLACED.
21. CONDENSING UNIT TO BE REMOVED AND RELOCATED.
22. REMOVE AND COORDINATE THE REUSE OF BABY TOILET BOWLS.
23. PROTECT AND PRESERVE WALL MURAL DURING DEMOLITION AND CONSTRUCTION.

DEMOLITION LEGEND

- EXISTING TO REMAIN
- TO BE DEMOLISHED/ REMOVED
- NO DEMOLITION SCOPE WITHIN THIS AREA IN THIS PHASE

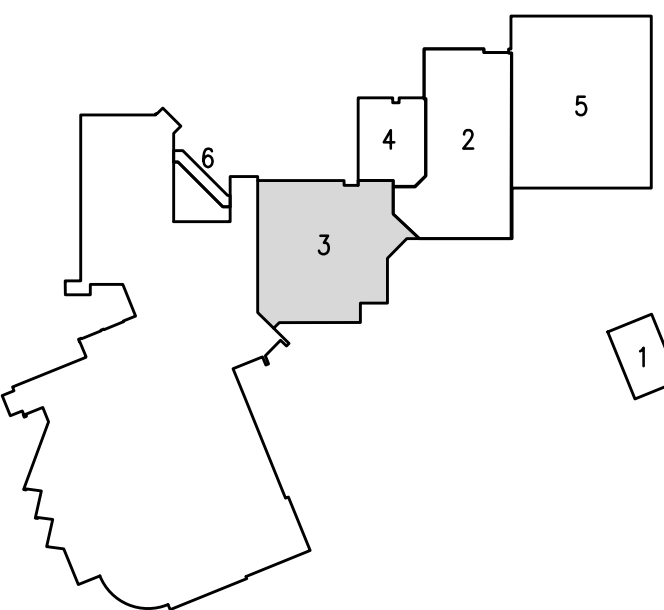

KEY PLAN
NORTH



01
A3.1

PHASE 3 DEMO RCP


SCALE: 1/8"=1'-0"

ARCHITECTURE
PLANNING
INTERIOR DESIGN

GHILA

NORTHWOOD CHURCH
RENOVATIONS

1870 RUFE SNOW DR.
KELLER, TEXAS 76248

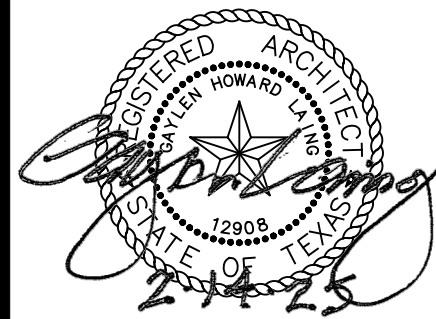

DATE: 08/14/24

ISSUE:



REVISION:

REVISD 04-30-25

SHEET TITLE:

PHASE 3
DEMO REFLECTED
CEILING PLAN

A3.1

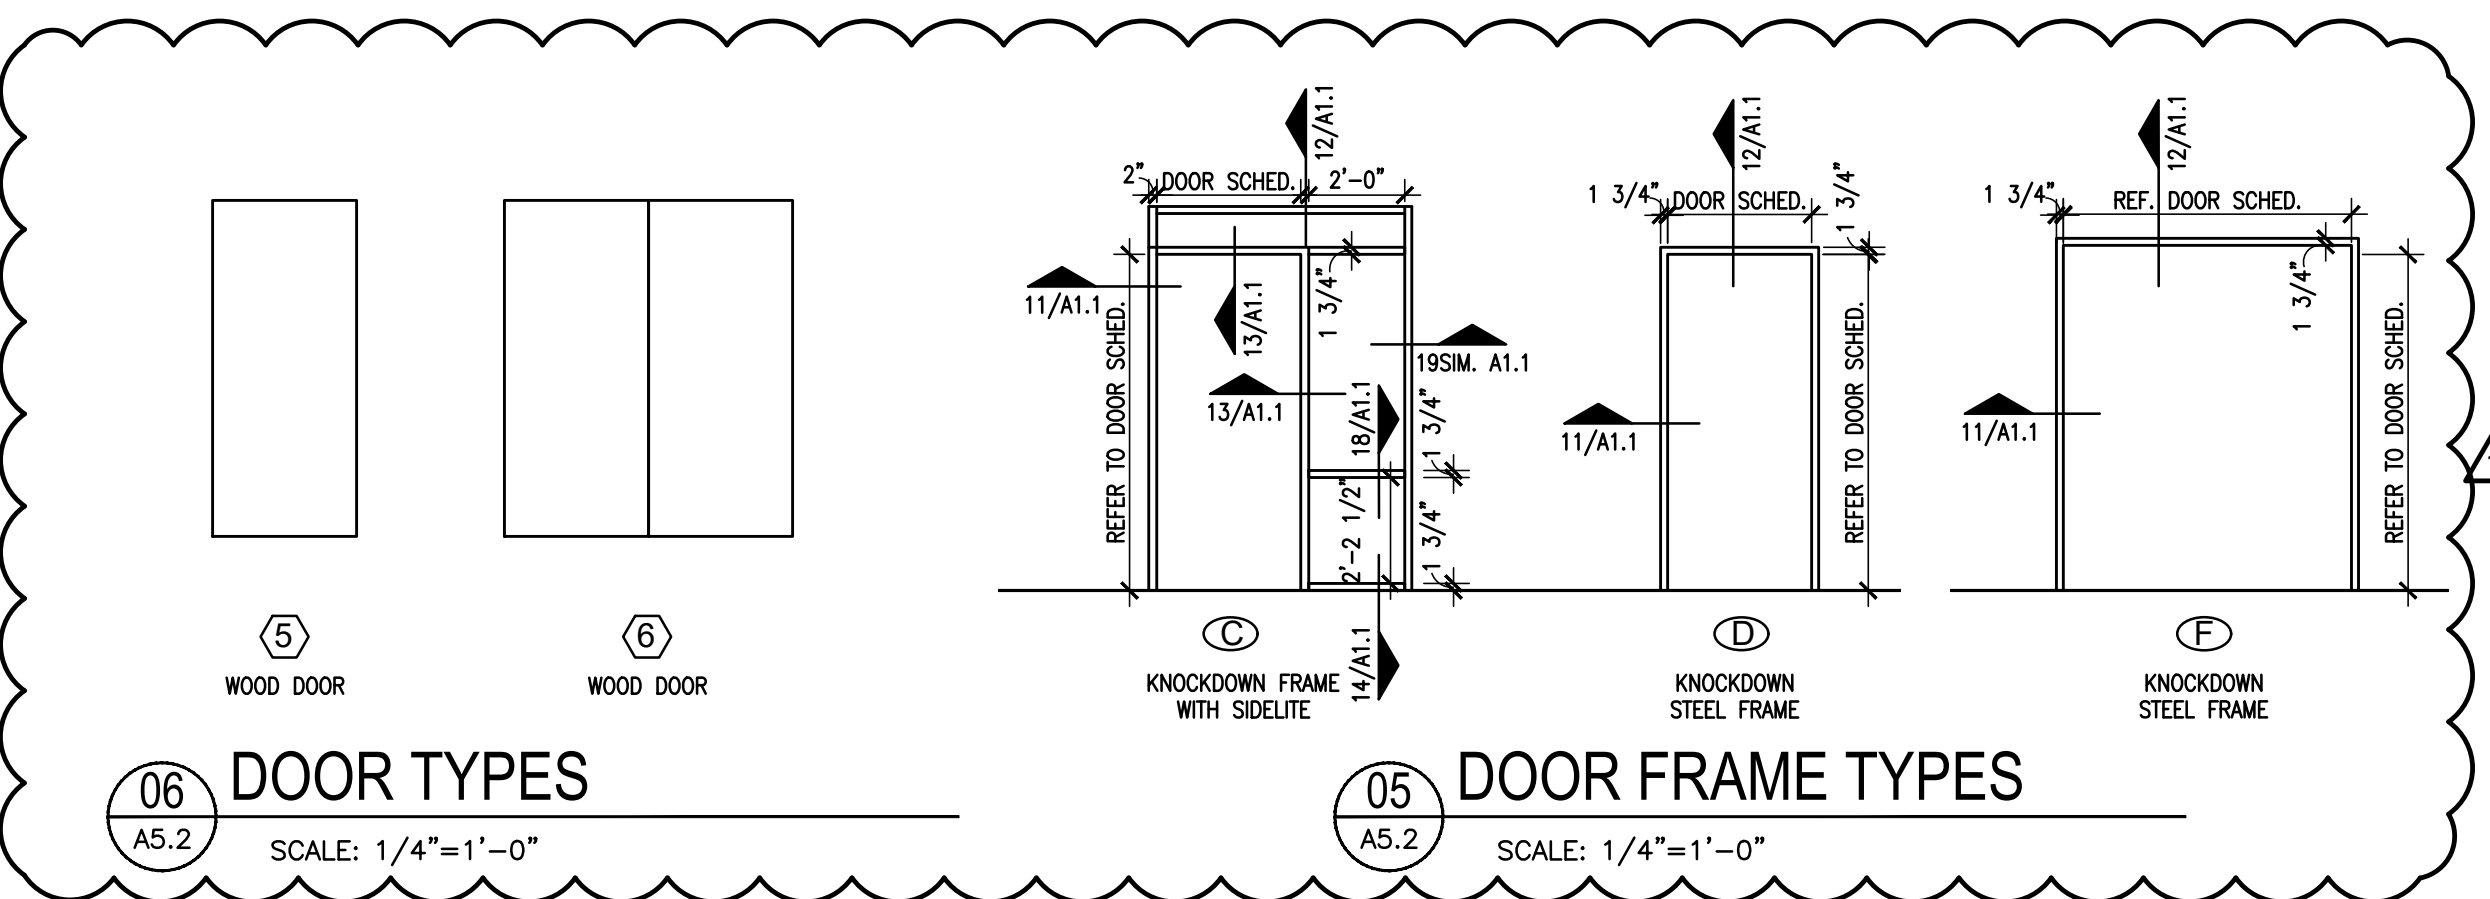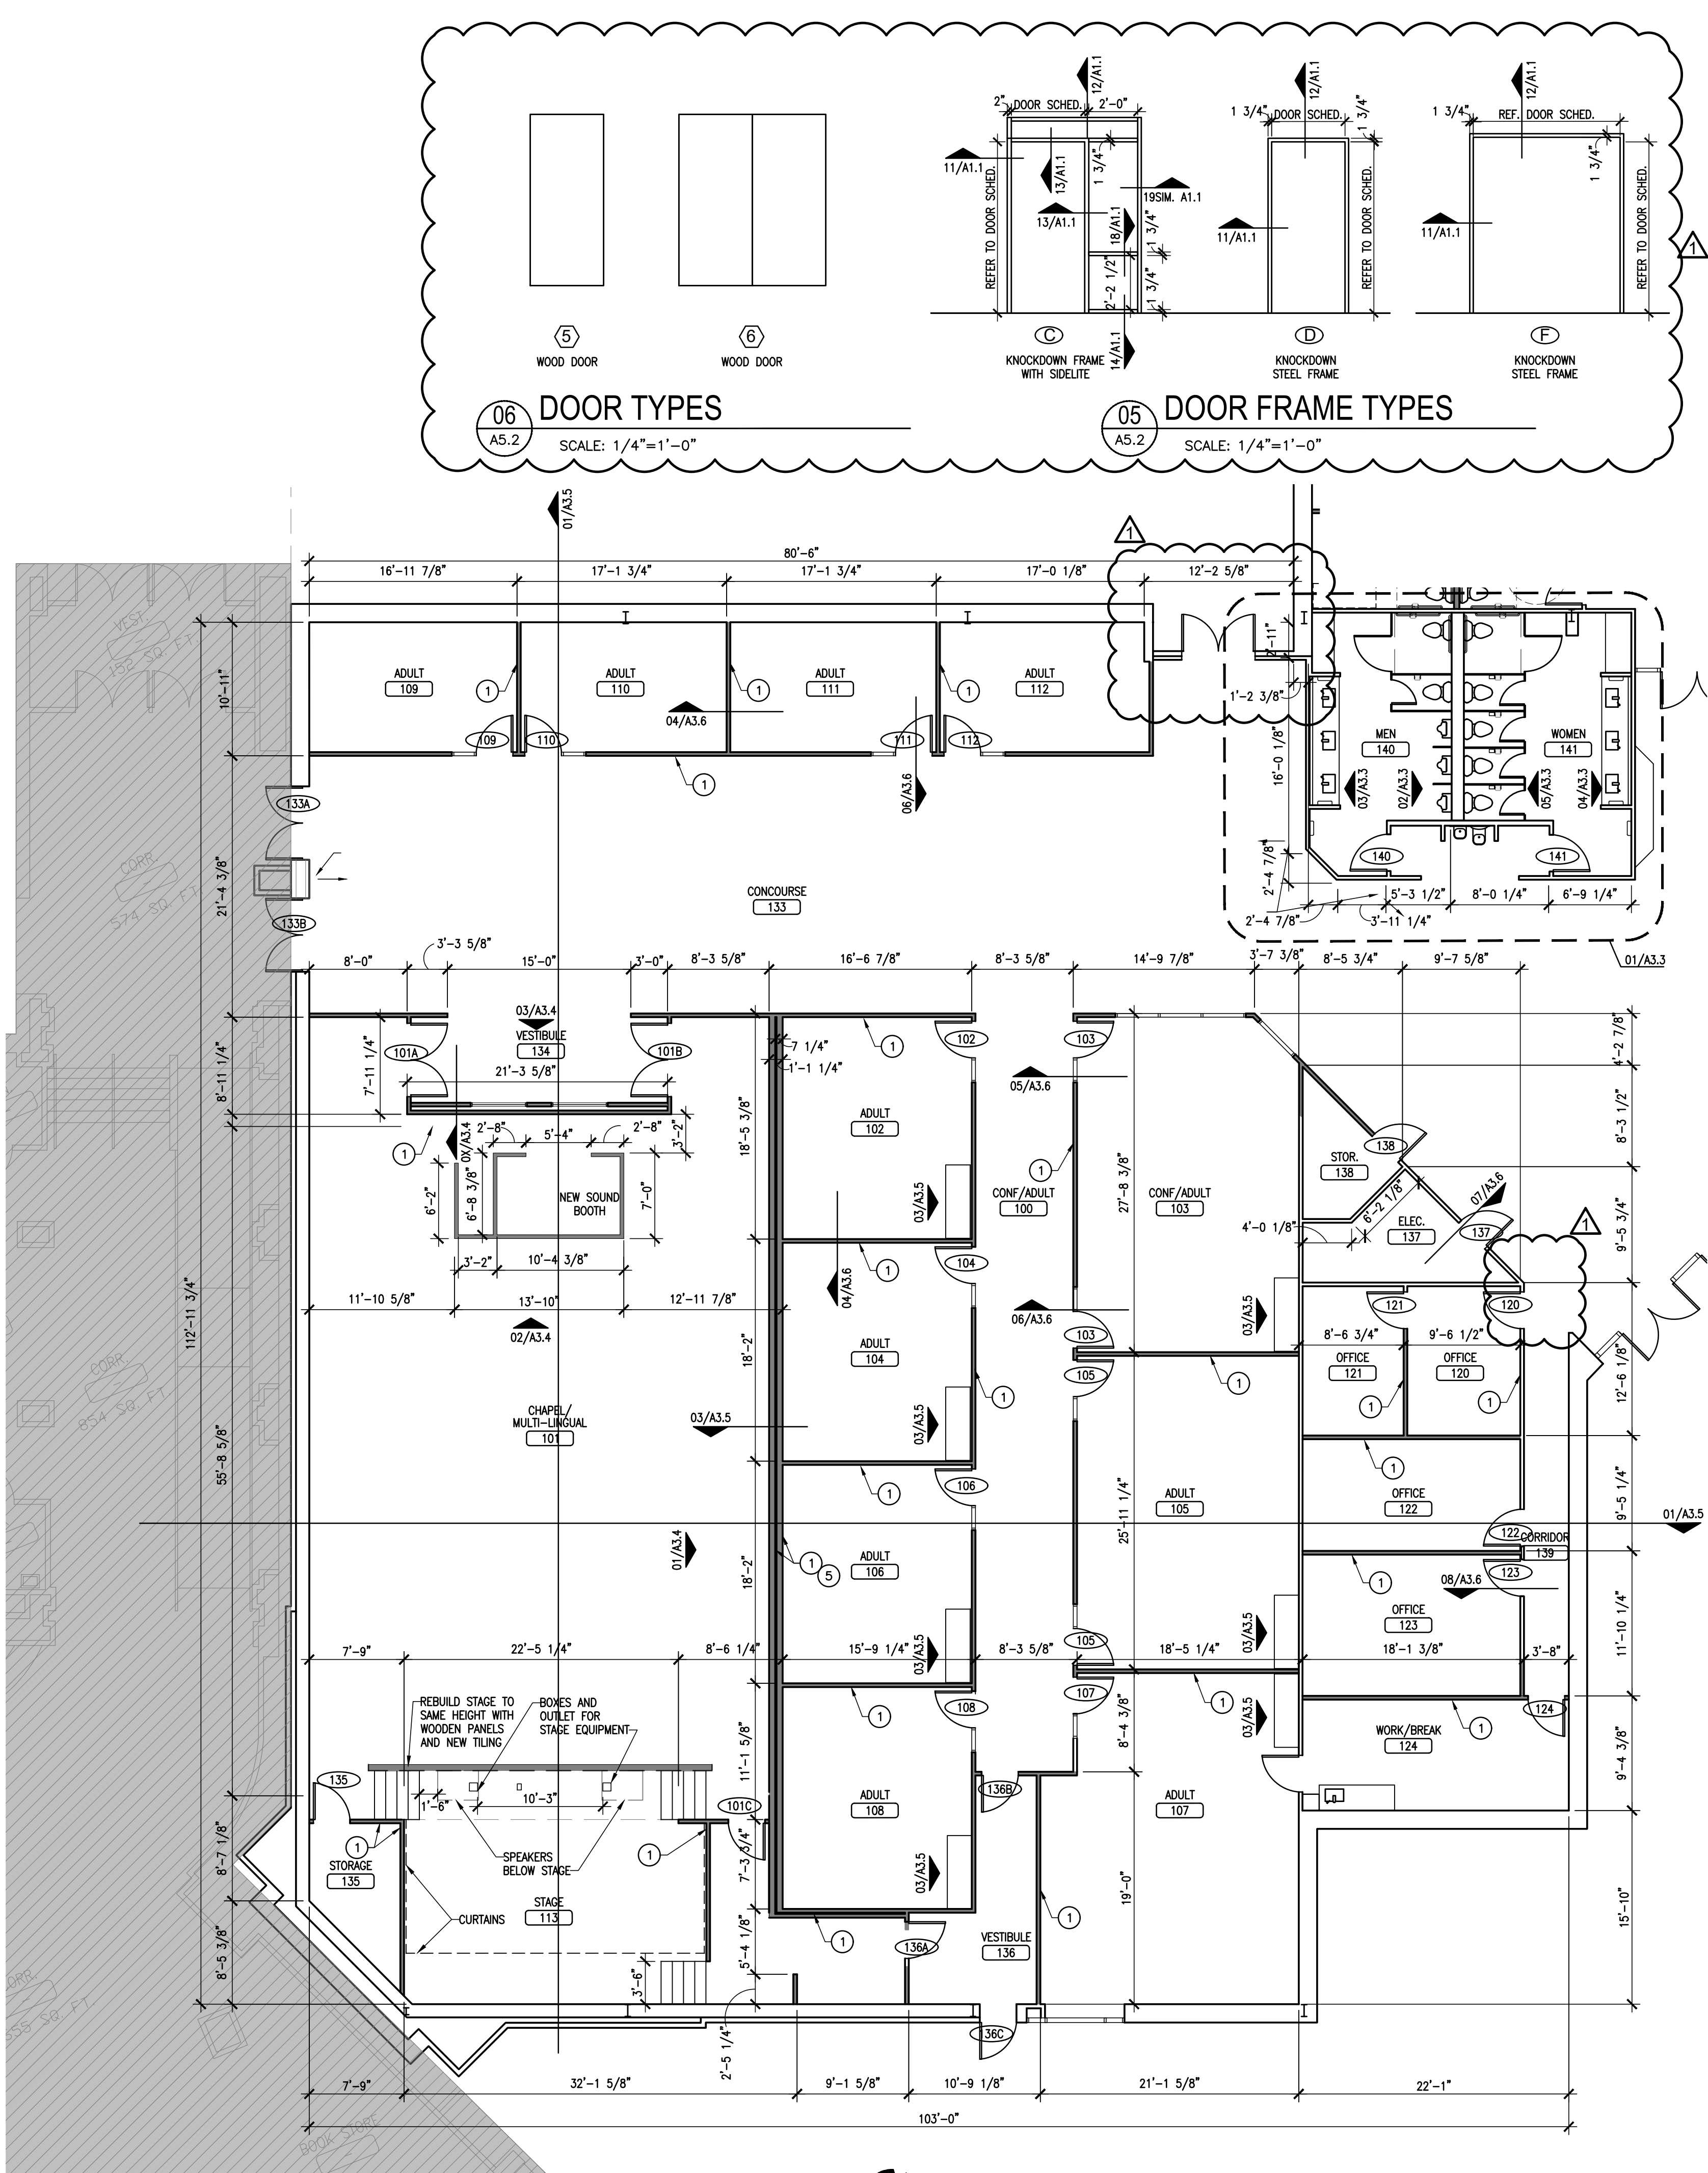

P3 ROOM FINISH SCHEDULE						
ROOM NO.	ROOM NAME	FLOOR	BASE	WALLS	CEILING	NOTES
101	CHAPEL/ MULTI-LINGUAL	CPT	VB	P	OPEN	
102	ADULT CLASSROOM	CPT	VB	P	ACT	
103	CONF/ADULT	CPT	VB	P	ACT	
104	ADULT CLASSROOM	CPT	VB	P	ACT	
105	ADULT CLASSROOM	CPT	VB	P	ACT	
106	ADULT CLASSROOM	CPT	VB	P	ACT	
107	ADULT CLASSROOM	CPT	VB	P	ACT	
108	ADULT CLASSROOM	CPT	VB	P	ACT	
109	ADULT CLASSROOM	CPT	VB	P	ACT	
110	ADULT CLASSROOM	CPT	VB	P	ACT	
111	ADULT CLASSROOM	CPT	VB	P	ACT	
112	ADULT CLASSROOM	CPT	VB	P	ACT	
113	STAGE	LVT	VB	P	ACT	
120	OFFICE	CPT	VB	P	ACT	
121	OFFICE	CPT	VB	P	ACT	
122	OFFICE	CPT	VB	P	ACT	
123	OFFICE	CPT	VB	P	ACT	
124	WORK/BREAK	LVP	VB	P	ACT	
133	CONCOURSE	CPT	CPT	P	ACT	
134	VESTIBULE	LVP	VB	P	ACT	
135	STORAGE	LVP	VB	P	ACT	
136	VESTIBULE	LVP	VB	P	ACT	
137	ELEC.	-	VB	P	ACT	
138	STORAGE	LVP	VB	P	ACT	
139	CORRIDOR	LVP	VB	P	ACT	
140	MENS	PT	PT	PT/P	ACT	
141	WOMENS	PT	PT	PT/P	ACT	

FLOORING:
CPT CARPET TILE
LVP LUXURY VINYL PLANK
ETR EXISTING TO REMAIN
PT PORCELAIN TILE
SC SEALED CONCRETE

BASE:
VB VINYL BASE

WALLS:
P PAINT AND TEXTURE ON GYP. BD.
CT PORCELAIN TILE
EPX EPOXY PAINT COATING

CEILING:
P PAINT AND TEXTURE ON GYP. BD.
ACT LAY-IN ACOUSTICAL TILE

GENERAL NOTES:
1. REFER TO INTERIOR ELEVATIONS FOR ADDITIONAL INFO.
2. BASE IN BATHROOMS SHALL BE 4" TALL.

CLEAR FLOOR SPACE	
1	60" TURNING DIAMETER
2	30" x 48" CLEAR FLOOR SPACE
3	60" x 50" CLEAR FLOOR SPACE
4	48" x 60" CLEAR FLOOR SPACE
5	36" x 48" CLEAR FLOOR SPACE
6	36" x 60" CLEAR FLOOR SPACE
7	42" x 58" CLEAR FLOOR SPACE
8	54" x 60" CLEAR FLOOR SPACE
9	48" x 48" CLEAR FLOOR SPACE
10	58" x 42" CLEAR FLOOR SPACE


TOILET ACCESSORIES	
TA1	ENMOTION PAPER TOWEL DISPENSER - WALL MOUNTED
TA2	TOILET TISSUE DISPENSER - DOUBLE ROLL
TA3	36" GRAB BAR
TA4	42" GRAB BAR
TA5	AUTOMATIC SOAP DISPENSER - DECK MOUNTED
TA6	SANITARY NAPKIN DISPOSAL UNIT
TA7	24" X 36" WALL MOUNTED MIRROR
TA8	SOAP DISPENSER - WALL MOUNTED
TA9	UNFRAMED MIRROR
SPECIFIC ACCESSORIES LISTED IN SECTION 10 28 13	

P3 DOOR SCHEDULE									
DOOR NO.	TYPE	SIZE	MATL	FRAME TYPE	MATL	FIRE	HW		
101A	6	(2)3'-0" X 7'-0"	WD	F	STL		13		
101B	6	(2)3'-0" X 7'-0"	WD	F	STL		13		
101C	5	3'-0" X 7'-0"	WD	D	STL		12		
102	5	3'-0" X 7'-0"	WD	C	STL		1		
103A	5	3'-0" X 7'-0"	WD	C	STL		1		
103B	5	3'-0" X 7'-0"	WD	C	STL		1		
104	5	3'-0" X 7'-0"	WD	C	STL		1		
105A	5	3'-0" X 7'-0"	WD	C	STL		1		
105B	5	3'-0" X 7'-0"	WD	C	STL		1		
106	5	3'-0" X 7'-0"	WD	C	STL		1		
107A	5	3'-0" X 7'-0"	WD	C	STL		1		
107B	5	3'-0" X 7'-0"	WD	C	STL		1		
108	5	3'-0" X 7'-0"	WD	C	STL		1		
109	5	3'-0" X 7'-0"	WD	C	STL		1		
110	5	3'-0" X 7'-0"	WD	C	STL		1		
111	5	3'-0" X 7'-0"	WD	C	STL		1		
112	5	3'-0" X 7'-0"	WD	C	STL		1		
120	5	3'-0" X 7'-0"	WD	D	STL		1		
121	5	3'-0" X 7'-0"	WD	D	STL		1		
122	5	3'-0" X 7'-0"	WD	D	STL		1		
123	5	3'-0" X 7'-0"	WD	D	STL		1		
124	5	3'-0" X 7'-0"	WD	D	STL		1		
133A	-	3'-0" X 7'-0"	ALUM	-	-	EXIST.			
133B	-	3'-0" X 7'-0"	WD	-	-	EXIST.			
133C	-	3'-0" X 7'-0"	WD	-	-	EXIST.			
135	5	3'-0" X 7'-0"	WD	D	STL		3		
136A	5	3'-0" X 7'-0"	WD	D	STL		12		
136B	5	3'-0" X 7'-0"	WD	D	STL		12		
136C	-	3'-0" X 7'-0"	WD	-	-	EXIST.			
137	-	3'-0" X 7'-0"	WD	-	-	EXIST.			
139	-	3'-0" X 7'-0"	WD	-	-	EXIST.			
140	5	3'-0" X 7'-0"	WD	D	STL		6		
141	-	3'-0" X 7'-0"	-	D	STL		6		

GENERAL NOTES:
1. ALL DOORS TO BE 1 3/4" U.N.O.
2. EXIT DEVICES SHALL COME WITH LOCKING LOCKSET ON OPPOSITE SIDE OF DOOR
3. DOOR SURFACES WITHIN 10" OF THE FINISH FLOOR OR GROUND MEASURED VERTICALLY SHALL HAVE A SMOOTH SURFACE ON THE PUSH SIDE EXTENDING THE FULL WIDTH OF THE DOOR.
4. ALL DOORS ARE TO BE PAINTED EXCEPT FOR DOORS IN PHASE 1.
5. NO VISION PANELS ON TOILET ENTRY DOORS.
DOOR/FRAME MATERIAL
PLAM PLASTIC LAMINATE CLAD
HOLLOW/PRESSED METAL
ALUM. ALUMINUM STOREFRONT
MTL METAL
RELOCATE EXIST. EXTERIOR DOORS


GENERAL FLOOR PLAN NOTES	
1.	REFER TO MEP DRAWINGS FOR MORE INFORMATION.
2.	ALL DIMENSIONS ARE TO FACE OF STUD OR TO FACE OF MASONRY UNLESS NOTED OTHERWISE. MASONRY DIMENSIONS ARE NOMINAL UNLESS NOTED OTHERWISE.
3.	CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND INFORM THE OWNER AND ARCHITECT OF ANY CONFLICT PRIOR TO THE COMMENCEMENT OF WORK.
4.	PROVIDE WOOD BLOCKING FOR ALL ITEMS OR EQUIPMENT FASTENING INTO DRYWALL PARTITIONS. TYPICAL: FOR TV LOCATIONS, PROVIDE 12" HIGH X 16" WIDE BLOCKING W/ CENTER AT 60" A.F.F. FOR BESIDE TV'S PROVIDE BLOCKING AS RECOMMENDED BY MANUFACTURER.
5.	ALL PUBLIC USE DOORS SHALL HAVE HC ACCESSIBLE CLEAR FLOOR SPACE. NOTIFY ARCHITECT OF ANY CONFLICT TO COMPLIANCE.
6.	REFER TO SHEET G2.1 & G2.2 FOR ACCESSIBILITY REQUIREMENT INCLUDING CLEAR FLOOR SPACE, MOUNTING HEIGHTS, CABINET CLEARANCES, ETC., THAT MUST BE MAINTAINED.
7.	SEAL ALL PENETRATIONS IN RATED ASSEMBLIES TO MAINTAIN THE REQUIRED RATING.
8.	WHERE WALLS AND PARTITIONS ARE REQUIRED TO HAVE A 1 HOUR FIRE RATED ASSEMBLY, STEEL ELECTRICAL BOXES ON OPPOSITE SIDES OF THE WALL SHALL BE SEPARATED BY THE FOLLOWING: A. BY HORIZONTAL DISTANCE OF NOT LESS THAN 24 INCHES. B. BY SOLID FIRE BLOCKING IN ACCORDANCE WITH SECTION 717.2.1 OF 2018 INTERNATIONAL BUILDING CODE, WHICH STATES THAT FIRE BLOCKING MATERIALS SHALL CONSIST OF 2-INCH NOMINAL LUMBER. C. BY PROTECTING BOTH OUTLET BOXES WITH LISTED PUTTY PADS.
9.	WHERE OCCUPIED SPACES ARE OPEN TO DECK, EXPOSED STRUCTURE, PIPE, DUCTWORK, AND DRYWALL SHALL BE PREPARED FOR PAINT.
10.	FLOORING TRANSITIONS BETWEEN ROOMS SHALL OCCUR BENEATH DOORS IN THE CLOSED POSITIONS, TYP.

FLOOR PLAN NOTES BY NUMBER	
1.	NEW METAL FRAMED WALL. SEE WALL SECTIONS FOR ADDITIONAL INFORMATION.
2.	NEW ALUMINUM FRAME AND GLASS PARTITION WALLS
3.	NEW EXTERIOR INFILL WALL TO MATCH EXISTING.
4.	RELOCATE EXISTING STOREFRONT DOOR & WINDOW UNITS.
5.	EXTEND NEW & EXISTING WALLS FULL HEIGHT TO DECK.
6.	REMOVE DOOR AND FRAME AND RE-INSTALL IN NEW WALL CONFIGURATION.
7.	BABY TOILET BOWLS TO BE REUSED/ADDED TO TOILET ROOMS 309, 310, 311, & 312.

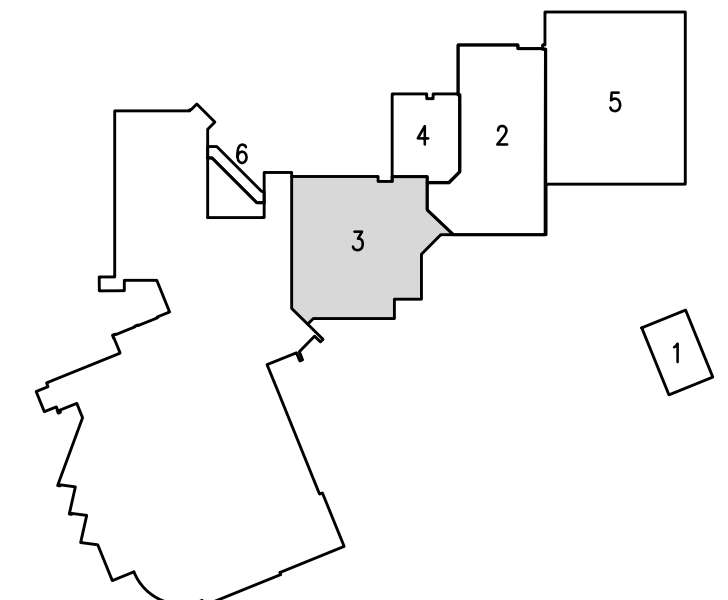

PHASE 3 FLOOR PLAN
SCALE: 1/8"=1'-0"


PHASING/
KEY PLAN

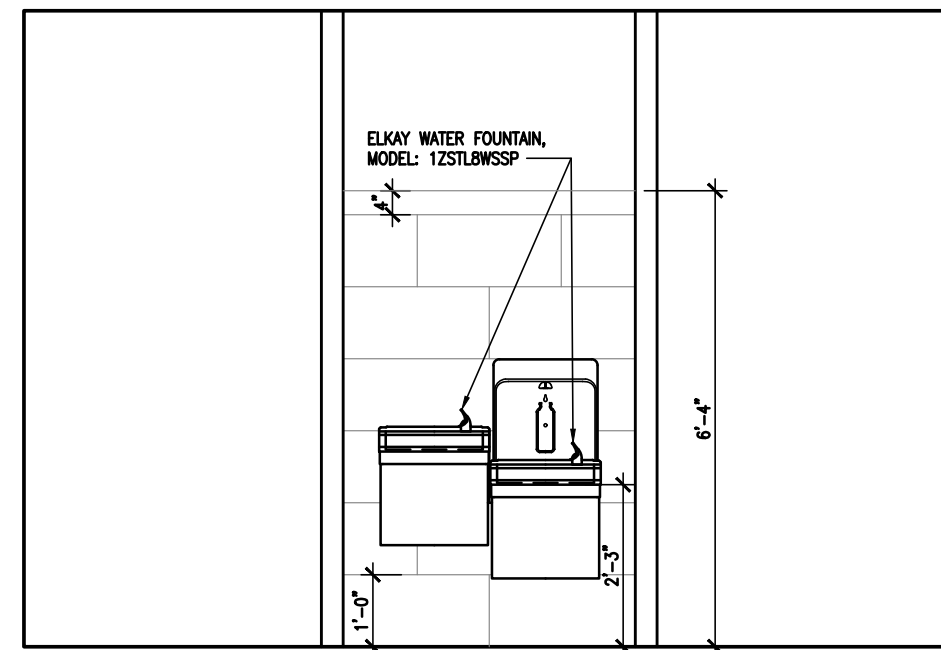


07
A3.3

INT. ELEVATION
WATER FOUNTAINS


SCALE: 3/8"=1'-0"

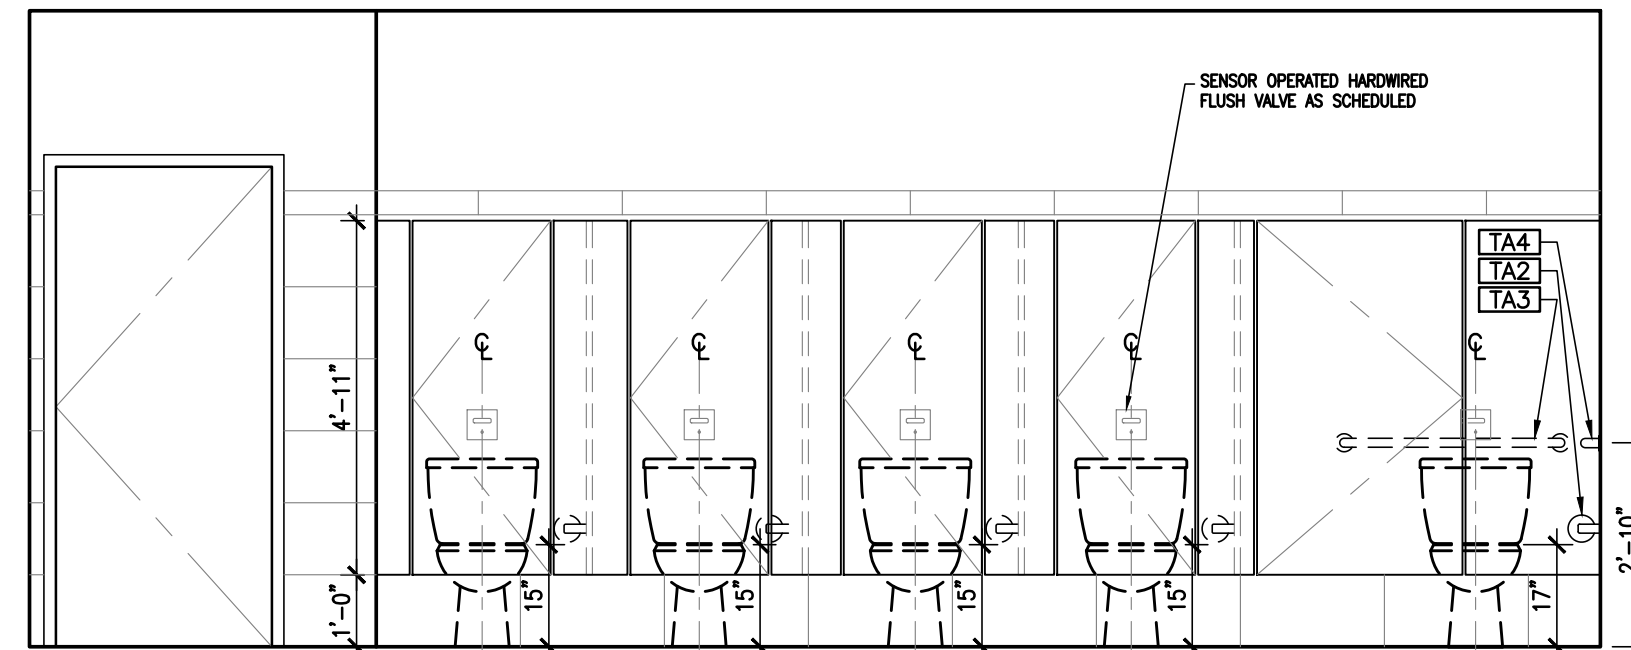


06 INT. ELEVATION - WOMEN
A3.3 SCALE: 3/8"=1'-0"

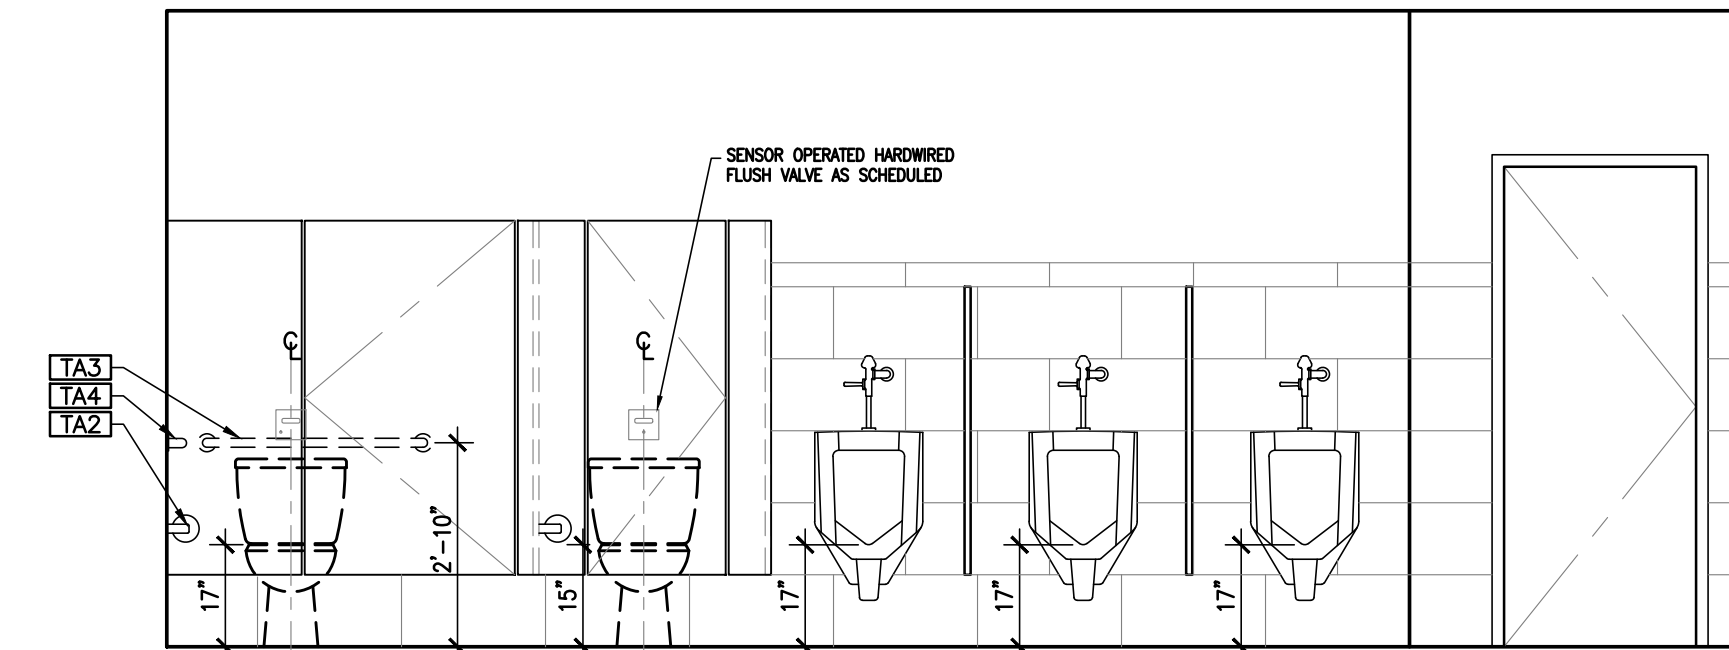


04 INT. ELEVATION - MEN
A3.3 SCALE: 3/8"=1'-0"

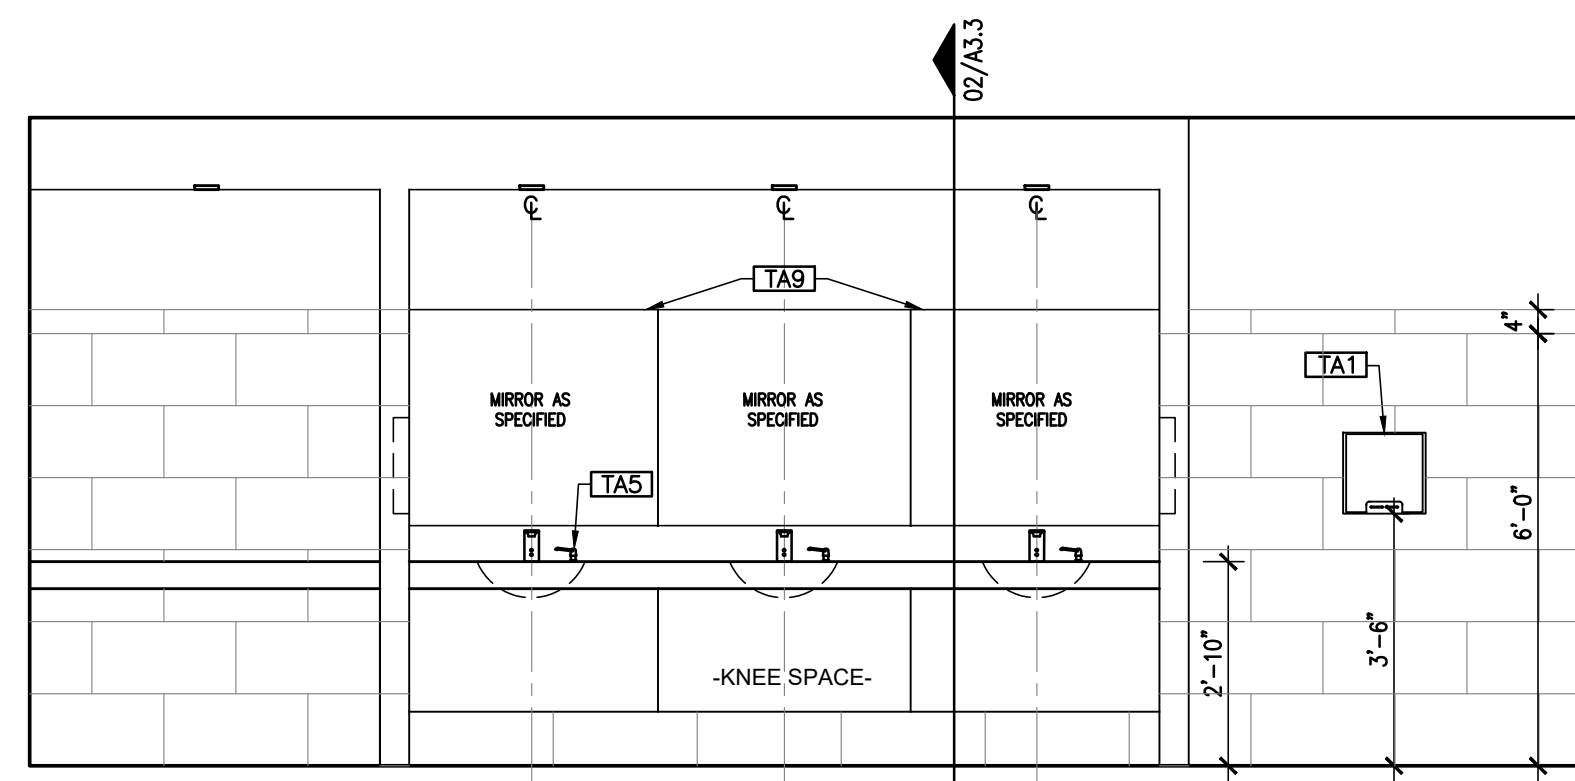


05 INT. ELEVATION - WOMEN
A3.3 SCALE: 3/8"=1'-0"

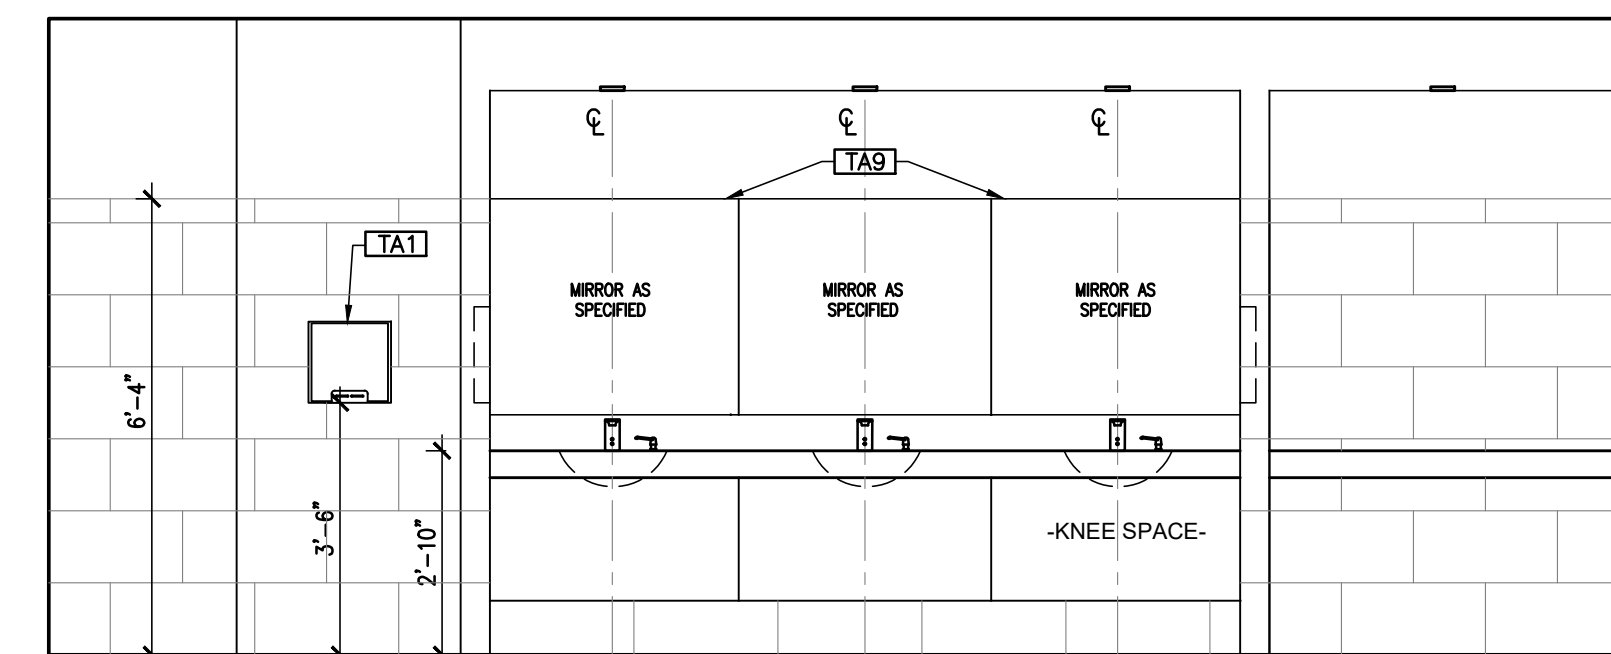

03 INT. ELEVATION - MEN
A3.3 SCALE: 3/8"=1'-0"

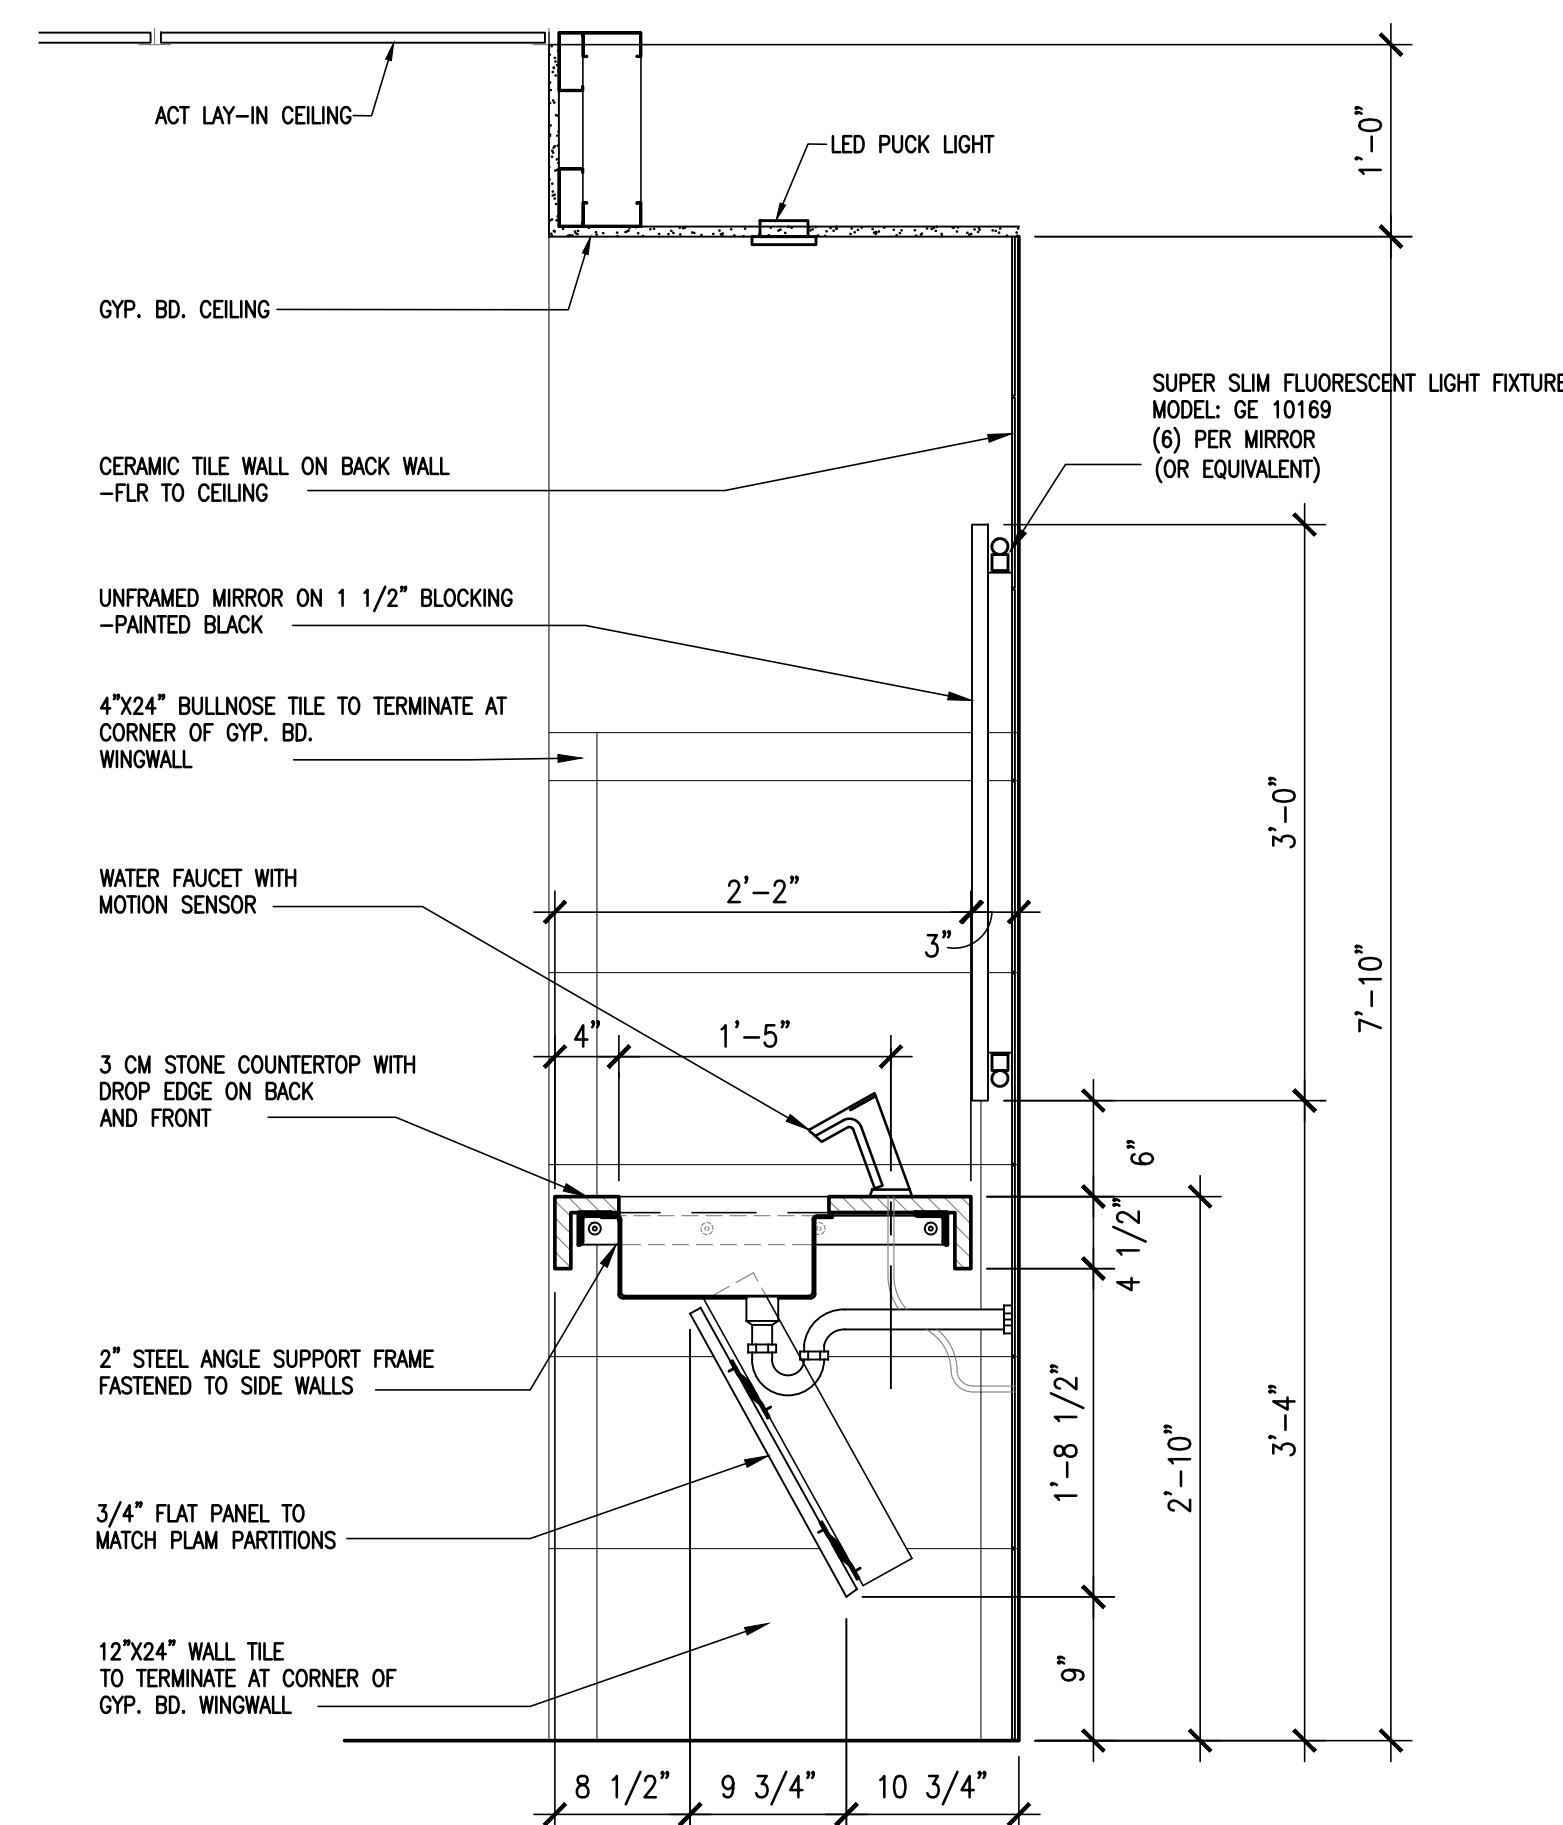

02 LAVATORY DETAIL
A3.3 SCALE: 1"=1'-0"

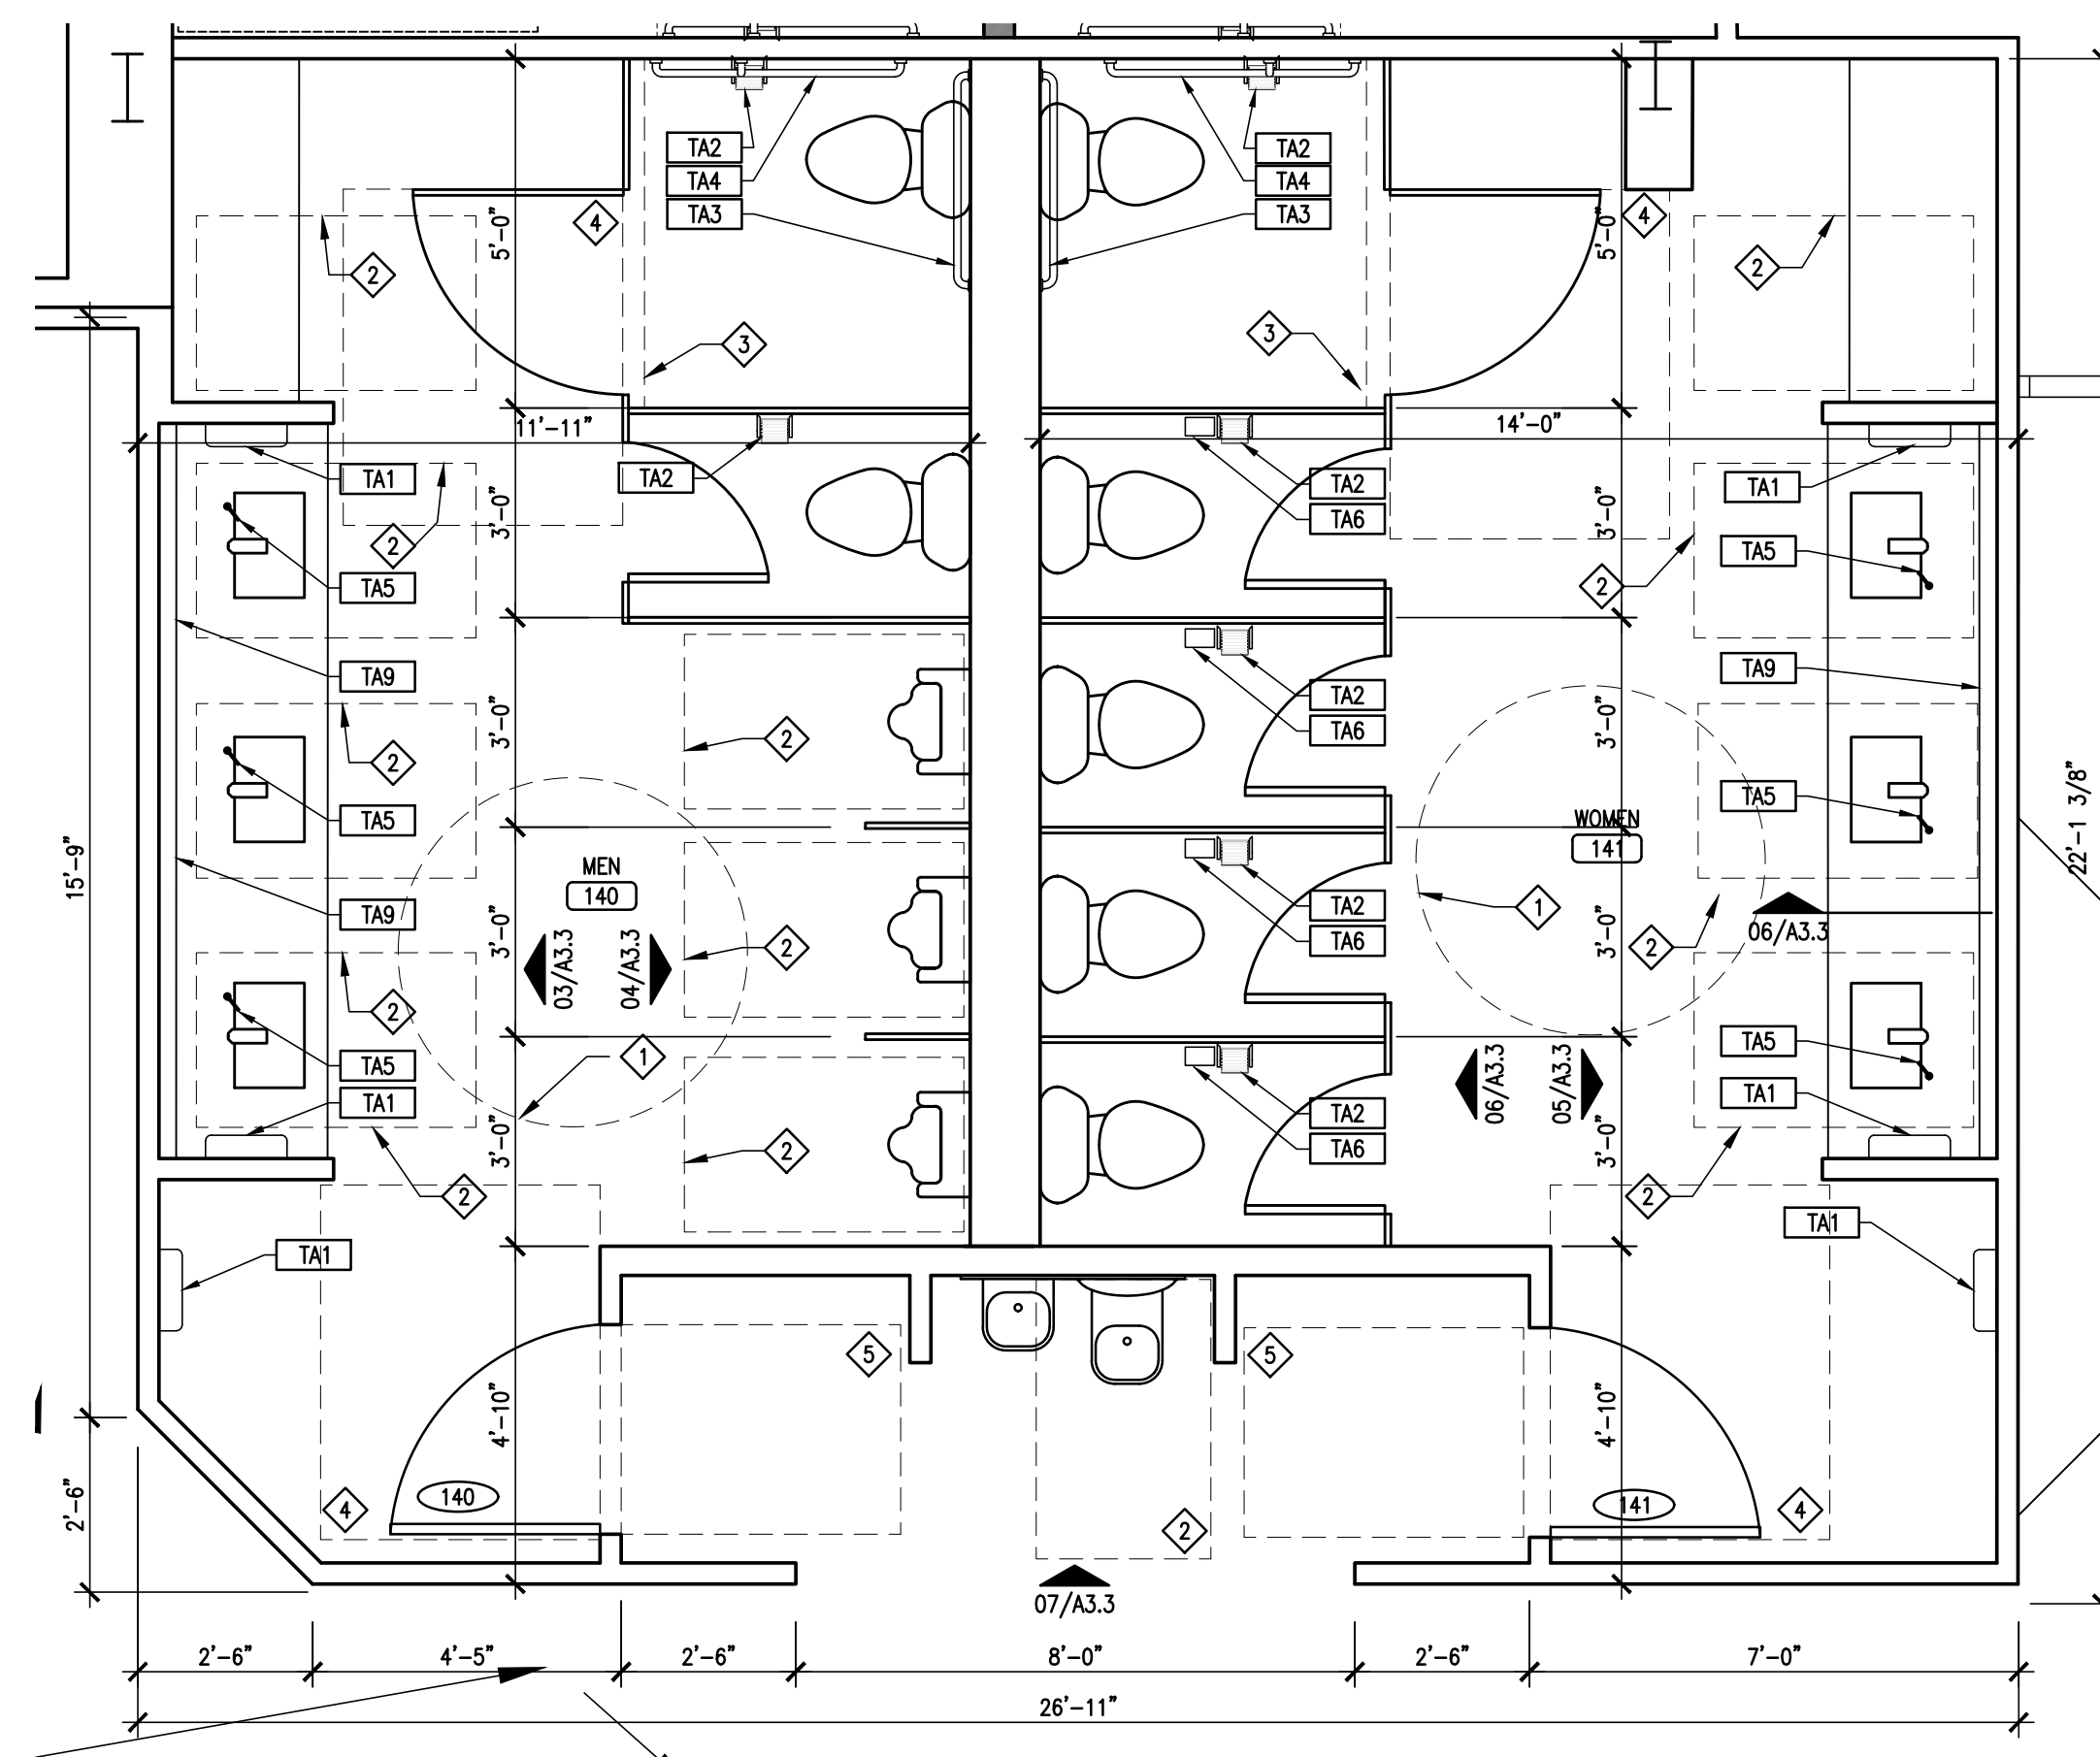



01 ENLARGED RESTROOM PLAN
A3.3 SCALE: 3/8"=1'-0"

TOILET ACCESSORIES	
TA1	ENMOTION PAPER TOWEL DISPENSER - WALL MOUNTED
TA2	TOILET TISSUE DISPENSER - DOUBLE ROLL
TA3	36" GRAB BAR
TA4	42" GRAB BAR
TA5	AUTOMATIC SOAP DISPENSER - DECK MOUNTED
TA6	SANITARY NAPKIN DISPOSAL UNIT
TA7	24" X 36" WALL MOUNTED MIRROR
TA8	SOAP DISPENSER - WALL MOUNTED
TA9	UNFRAMED MIRROR
SPECIFIC ACCESSORIES LISTED IN SECTION 10 28 13	


CLEAR FLOOR SPACE

- 1 60" TURNING DIAMETER
- 2 30" x 48" CLEAR FLOOR SPACE
- 3 60" x 56" CLEAR FLOOR SPACE
- 4 48" x 60" CLEAR FLOOR SPACE
- 5 36" x 48" CLEAR FLOOR SPACE
- 6 36" x 60" CLEAR FLOOR SPACE
- 7 42" x 58" CLEAR FLOOR SPACE
- 8 54" x 60" CLEAR FLOOR SPACE
- 9 48" x 48" CLEAR FLOOR SPACE
- 10 58" x 42" CLEAR FLOOR SPACE

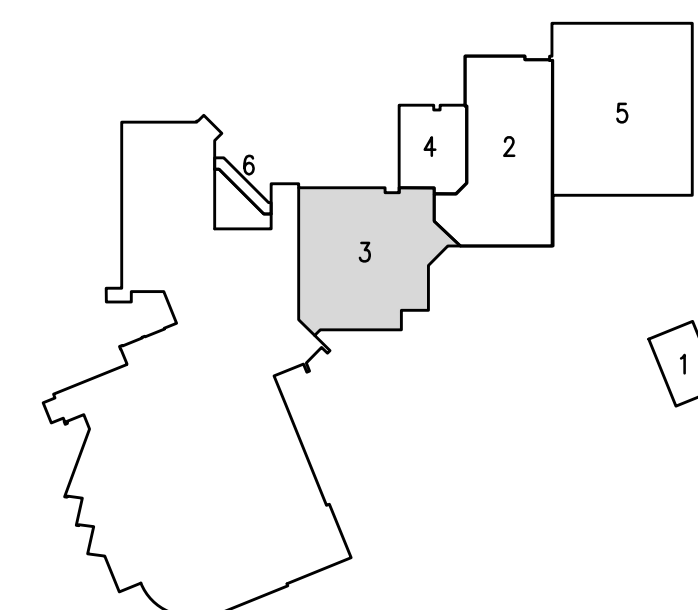


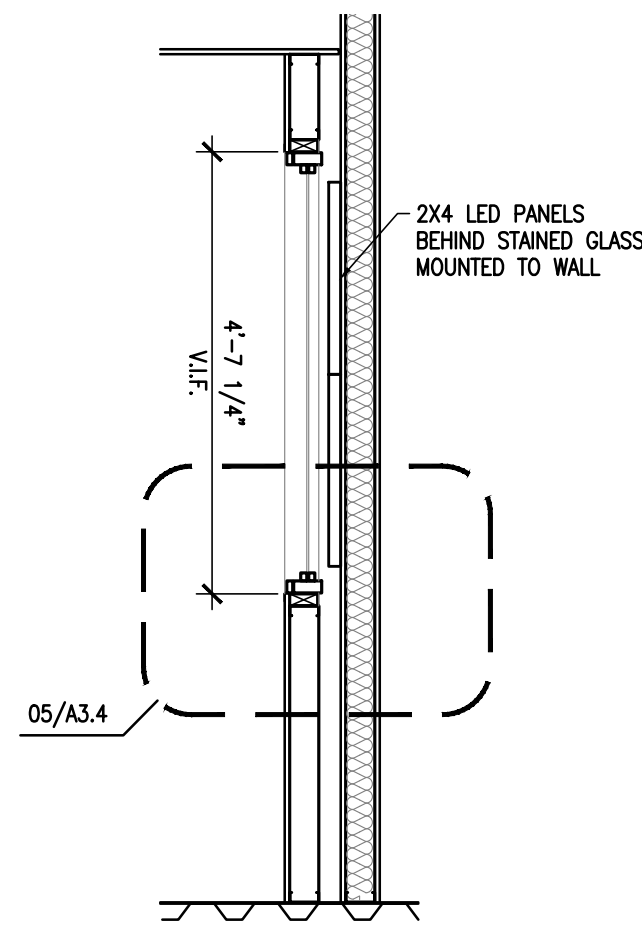


06
A3.4
PHASE 3 -STAINED
WALL SECTION
SCALE: 1/2"=1'-0"

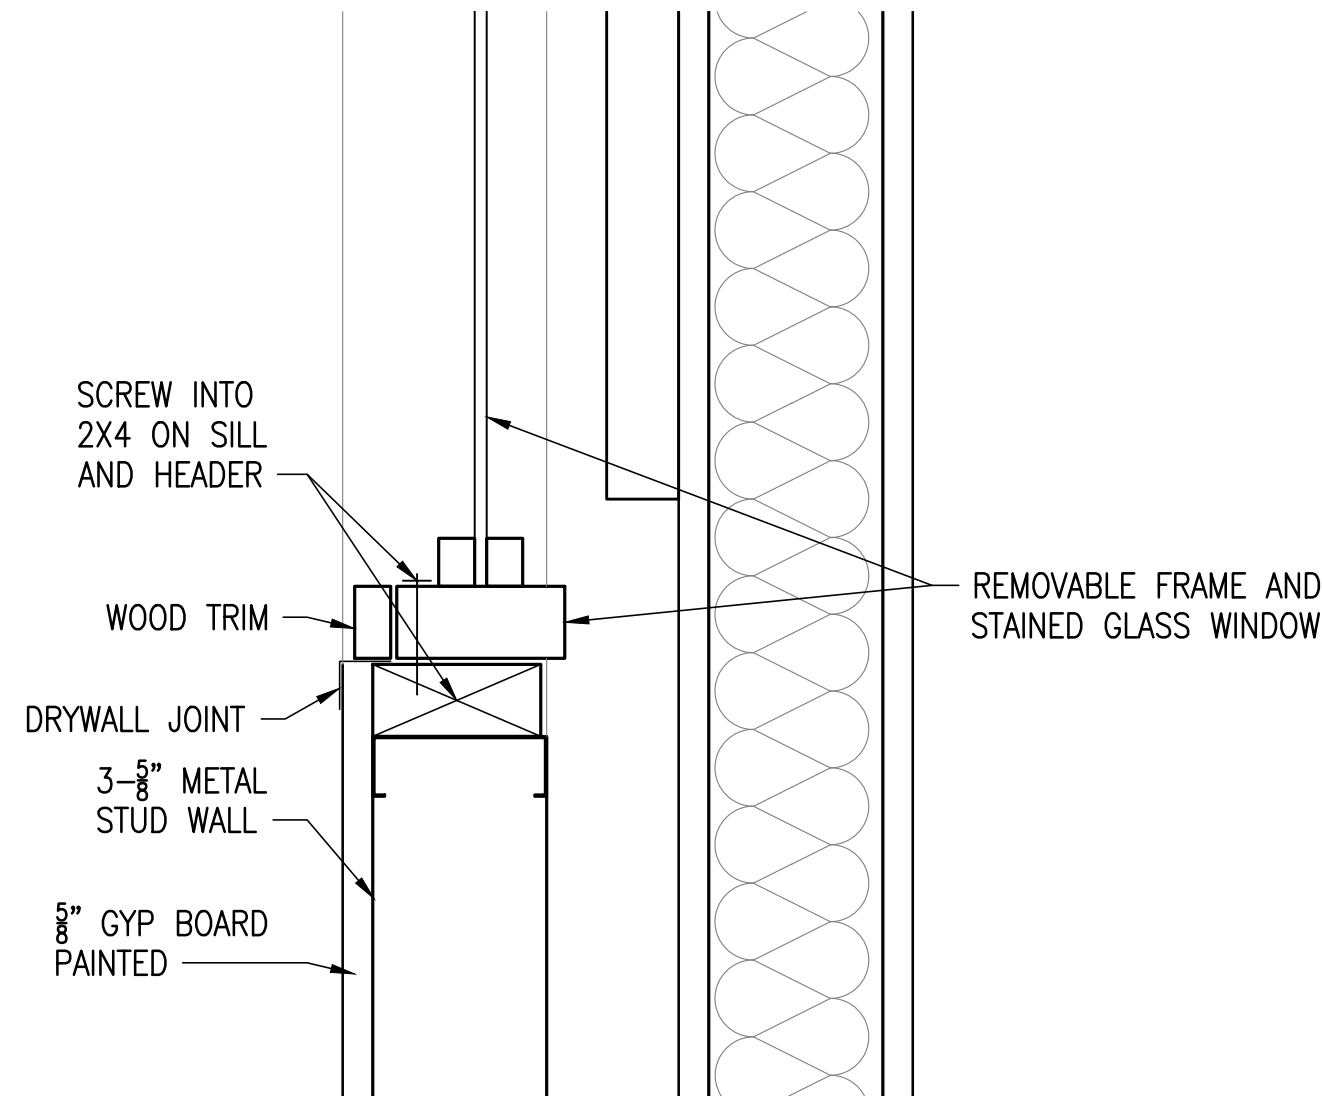


05
A3.4
PHASE 3 -STAINED
WALL SECTION DETAIL
SCALE: 3"=1'-0"

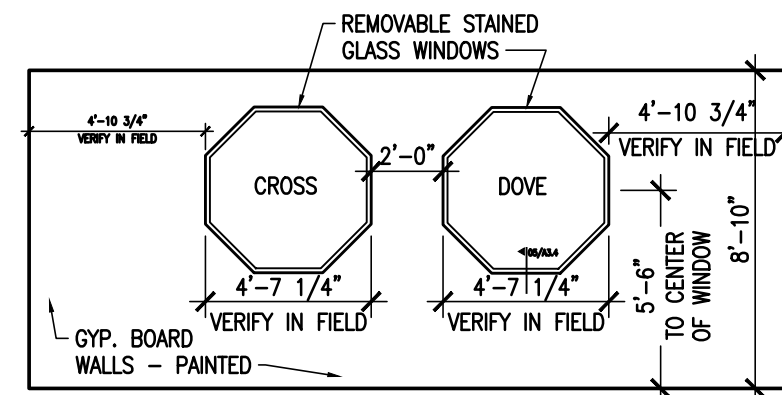


03
A3.4
PHASE 3
STAINED GLASS ELEVATION
SCALE: 3/16"=1'-0"

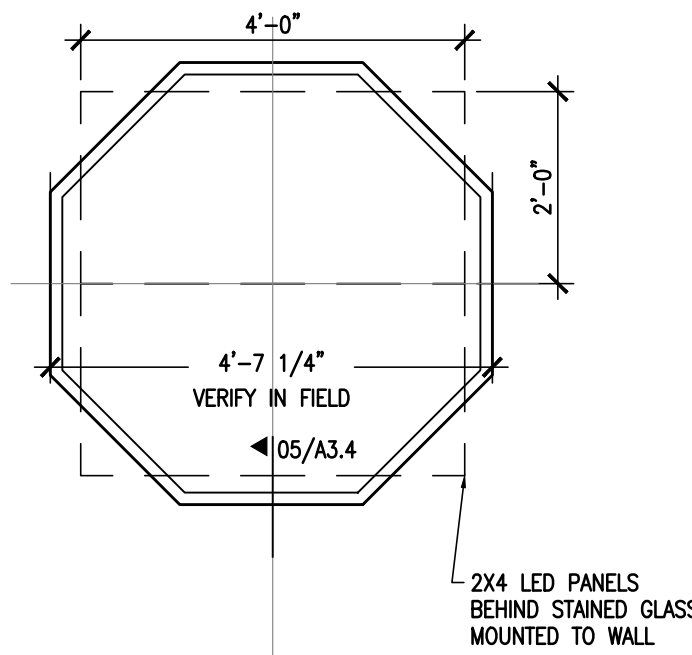


04
A3.4
PHASE 3
STAINED GLASS DETAIL
SCALE: 1/2"=1'-0"

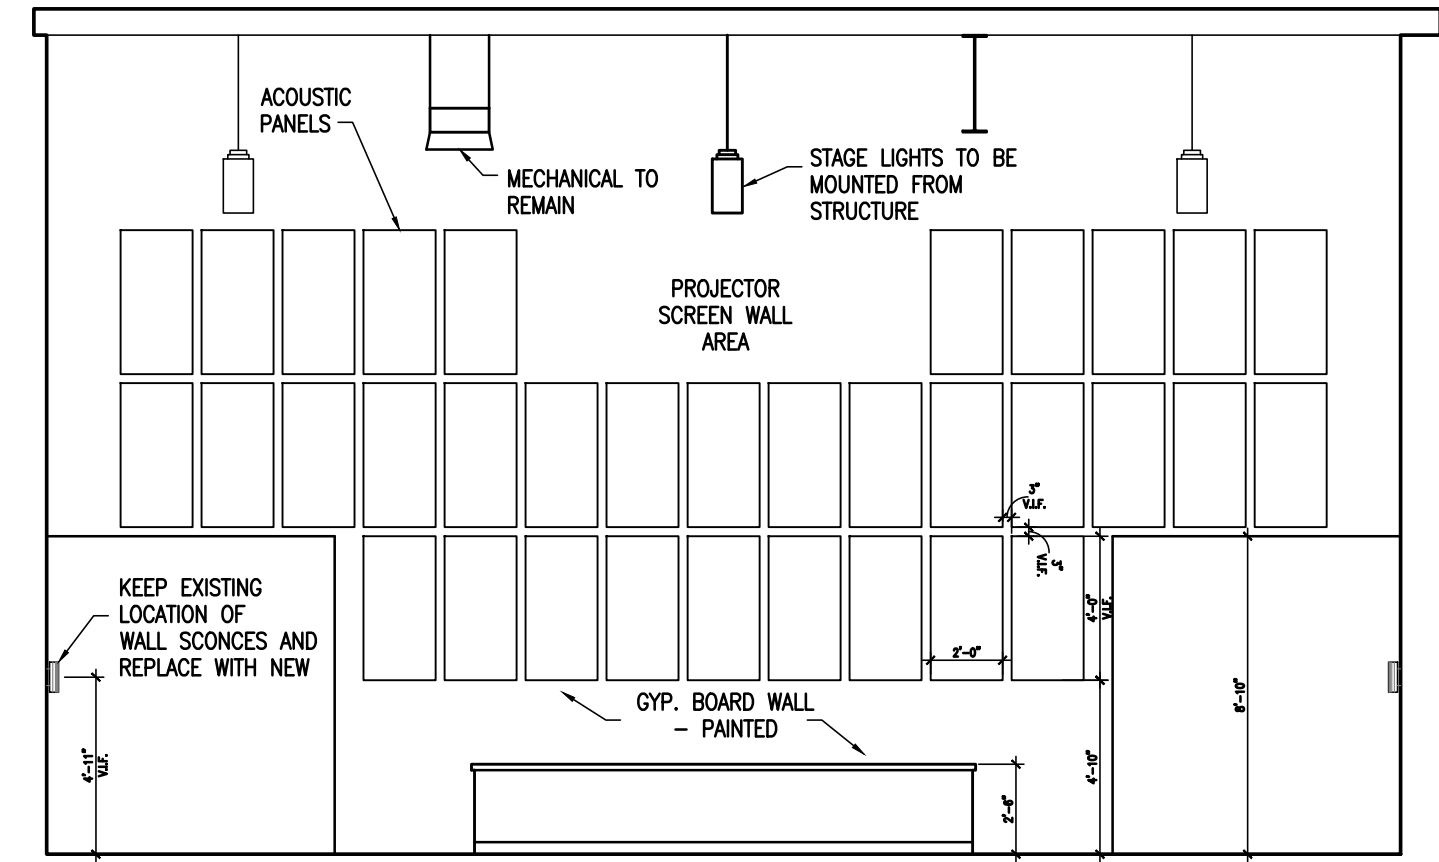

02
A3.4
PHASE 3
INTERIOR ELEVATION
SCALE: 3/16"=1'-0"

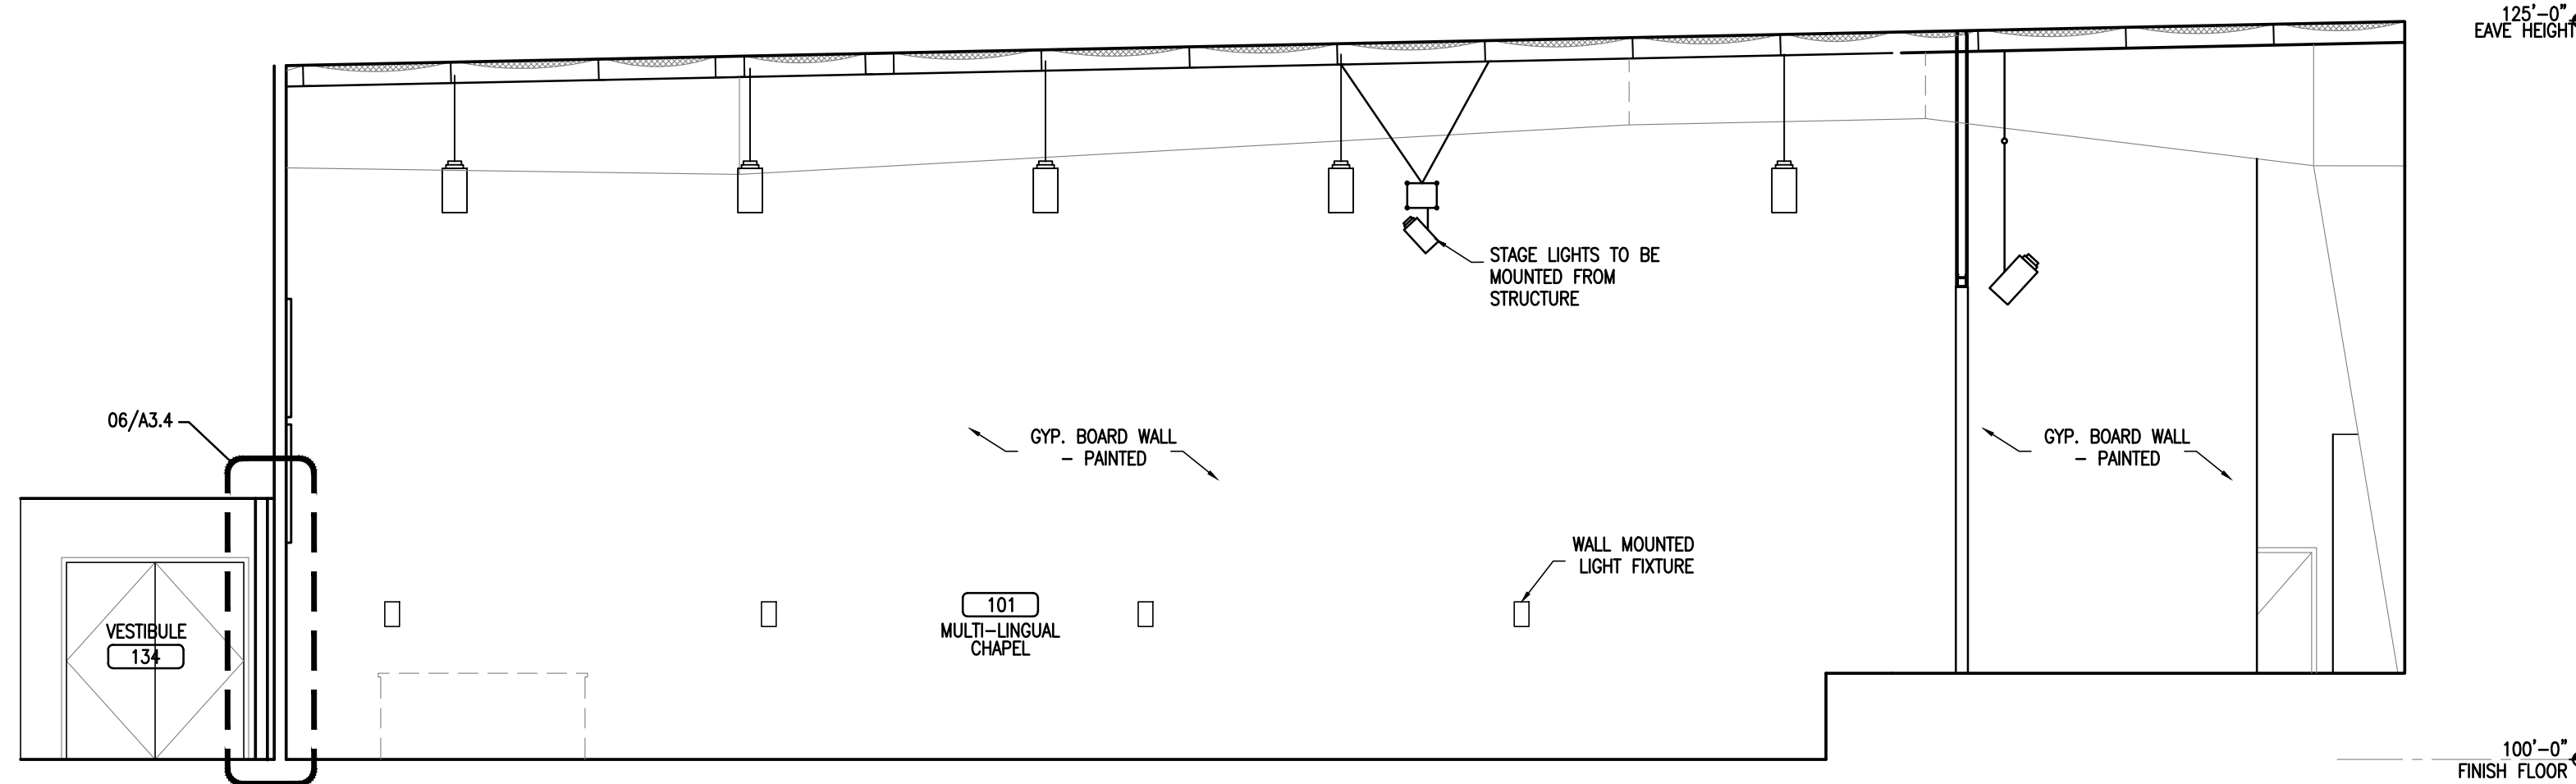

01
A3.4
PHASE 3
INTERIOR ELEVATION
SCALE: 3/16"=1'-0"

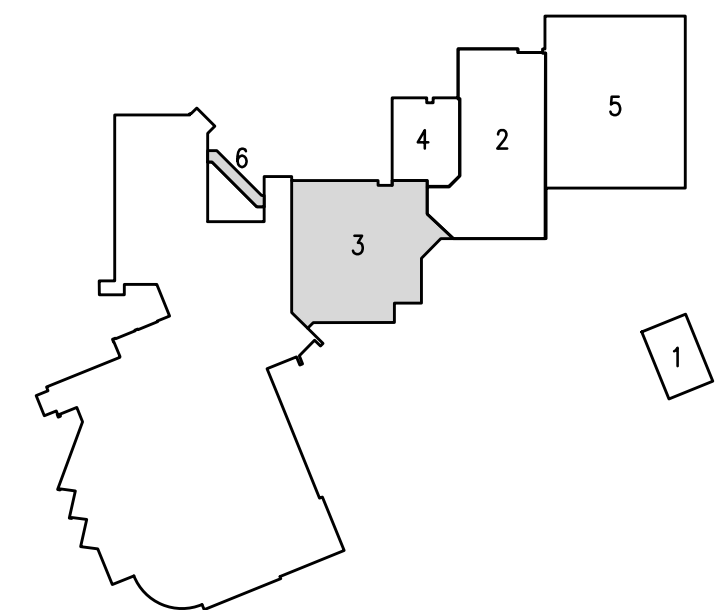

KEY PLAN
NORTH




01
A3.5

PHASE 3 RCP

SCALE: 1/8"=1'-0"



PHASING/
KEY PLAN

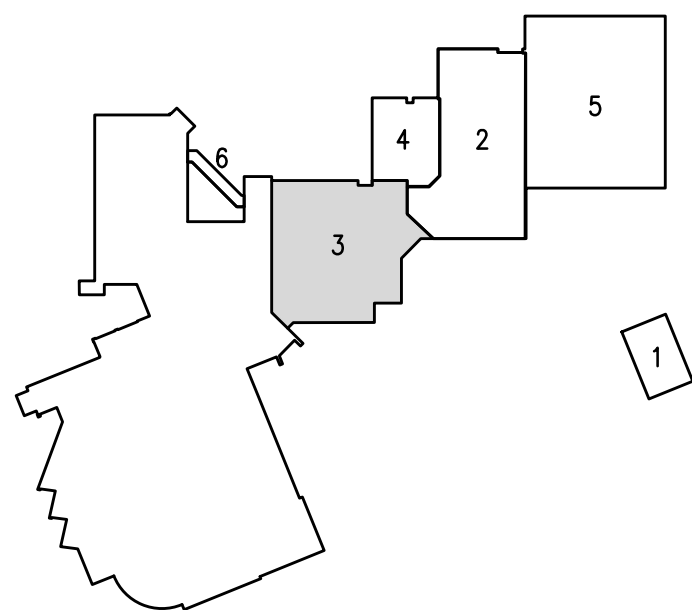

GENERAL RCP NOTES


- ALL 1 HOUR PARTITION WALLS SHALL TERMINATE TO THE BOTTOM OF THE 1-HOUR ROOF/CEILING ASSEMBLY.
- ALL PENETRATIONS THROUGH RATED WALLS SHALL BE FIRE-STOPPED AS REQUIRED TO MAINTAIN WALL RATING.
- COORDINATE LIGHT FIXTURE LOCATIONS WITH DOORS, MECHANICAL EQUIPMENT AND FIRE SPRINKLERS. NOTIFY THE ARCHITECT IF THERE IS A DISCREPANCY.
- RELOCATE EXISTING HVAC AIR DEVICES AS REQUIRED. EXTEND OR OTHERWISE MODIFY DUCTWORK TO MAINTAIN PROPER PERFORMANCE OF THE SYSTEM.
- RELOCATE FIRE SUPPRESSION SPRINKLER HEADS AS REQUIRED. EXTEND OR MODIFY PIPING AS REQUIRED TO RESULT IN A CODE COMPLIANT SYSTEM. THE SPRINKLER CONTRACTOR SHALL PROVIDE ENGINEERED DESIGN AND SUBMIT TO THE CITY FOR APPROVAL.

RCP LEGEND

- 2x4 LAY-IN TROFFER LED LIGHT FIXTURE
- 2x2 LAY-IN TROFFER LED LIGHT FIXTURE
- SURFACE MOUNT LED LIGHT FIXTURE
- WALL PACK
- SCONCE WALL MOUNT FIXTURE
- PENDANT WALL MOUNT FIXTURE
- LED COVE STRIP LIGHT
- WALL MOUNTED LIGHT FIXTURE
- PENDANT LIGHT/ CHANDELIER
- RECESSED DOWNLIGHT FIXTURE
- EXIT LIGHT
- SUSPENDED CEILING
- AREA NOT AFFECTED DURING THIS PHASE

RCP NOTES BY NUMBER (#)

- 2x2 A.C.T SUSPENDED CEILING W/ 6" R-19 FIBERGLASS INSULATION OVER.
- NEW 1-HR FIRE RATED GYPSUM BOARD CEILING, GA FILE NO. RC-2601. RE: RCP AND DETAILS.
- EXISTING CEILING AND LIGHTING TO REMAIN.
- REPLACE FABRIC ON EXISTING METAL AWNING STRUCTURE.
- LIGHT COVE WITH LED COVE STRIP LIGHT.
- CEILING OPEN TO DECK.
- PENDANT LIGHTING SUSPENDED FROM ROOF STRUCTURE.
- DECORATIVE RECESSED WOOD RAFTERS/BEAMS.
- SUSPENDED LINEAR LIGHT FIXTURE.
- EXISTING LIGHTING FIXTURE TO REMAIN.

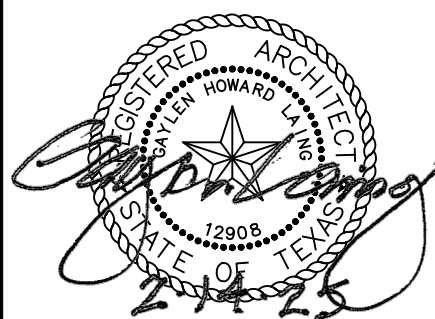

DATE: 08/14/24

ISSUE:

REVISION:

REVISED 04-30-25


SHEET TITLE:

PHASE 3
REFLECTED
CEILING PLAN


A3.5

PROSTUD FULL COMPOSITE					
LIMITING HEIGHTS					
5/8" TYPE X GYPSUM					
WIDTH	STUD MEMBER	DESIGN THICKNESS (IN)	YIELD STRENGTH (KSL)	SPACING (IN)	LATORAL LOAD - 5 PSF
3-5/8"	PROSTUD 25 362PDS125-15	0.0158	50	12	17'-1"
				16	15'-6"
				24	13'-6"
	PROSTUD 20 362PDS125-18	0.0190	70	12	18'-2"
				16	16'-10"
				24	15'-1"
	PROSTUD 30 362PDS125-30	0.0312	33	12	20'-5"
				16	18'-6"
				24	16'-2"
	PROSTUD 33 362PDS125-33	0.0346	33	12	21'-2"
				16	19'-2"
				24	16'-9"


PROSTUD NON-COMPOSITE					
LIMITING HEIGHTS					
5/8" TYPE X GYPSUM					
WIDTH	STUD MEMBER	DESIGN THICKNESS (IN)	YIELD STRENGTH (KSL)	SPACING (IN)	LATORAL LOAD - 5 PSF
3-5/8"	PROSTUD 25 362PDS125-15	0.0158	50	12	12'-5"
				16	10'-9"
				24	8'-9"
	PROSTUD 20 362PDS125-18	0.0190	70	12	14'-8"
				16	13'-2"
				24	10'-9"
	PROSTUD 30 362PDS125-30	0.0312	33	12	17'-4"
				16	15'-9"
				24	13'-9"
	PROSTUD 33 362PDS125-33	0.0346	33	12	17'-11"
				16	16'-3"
				24	14'-3"

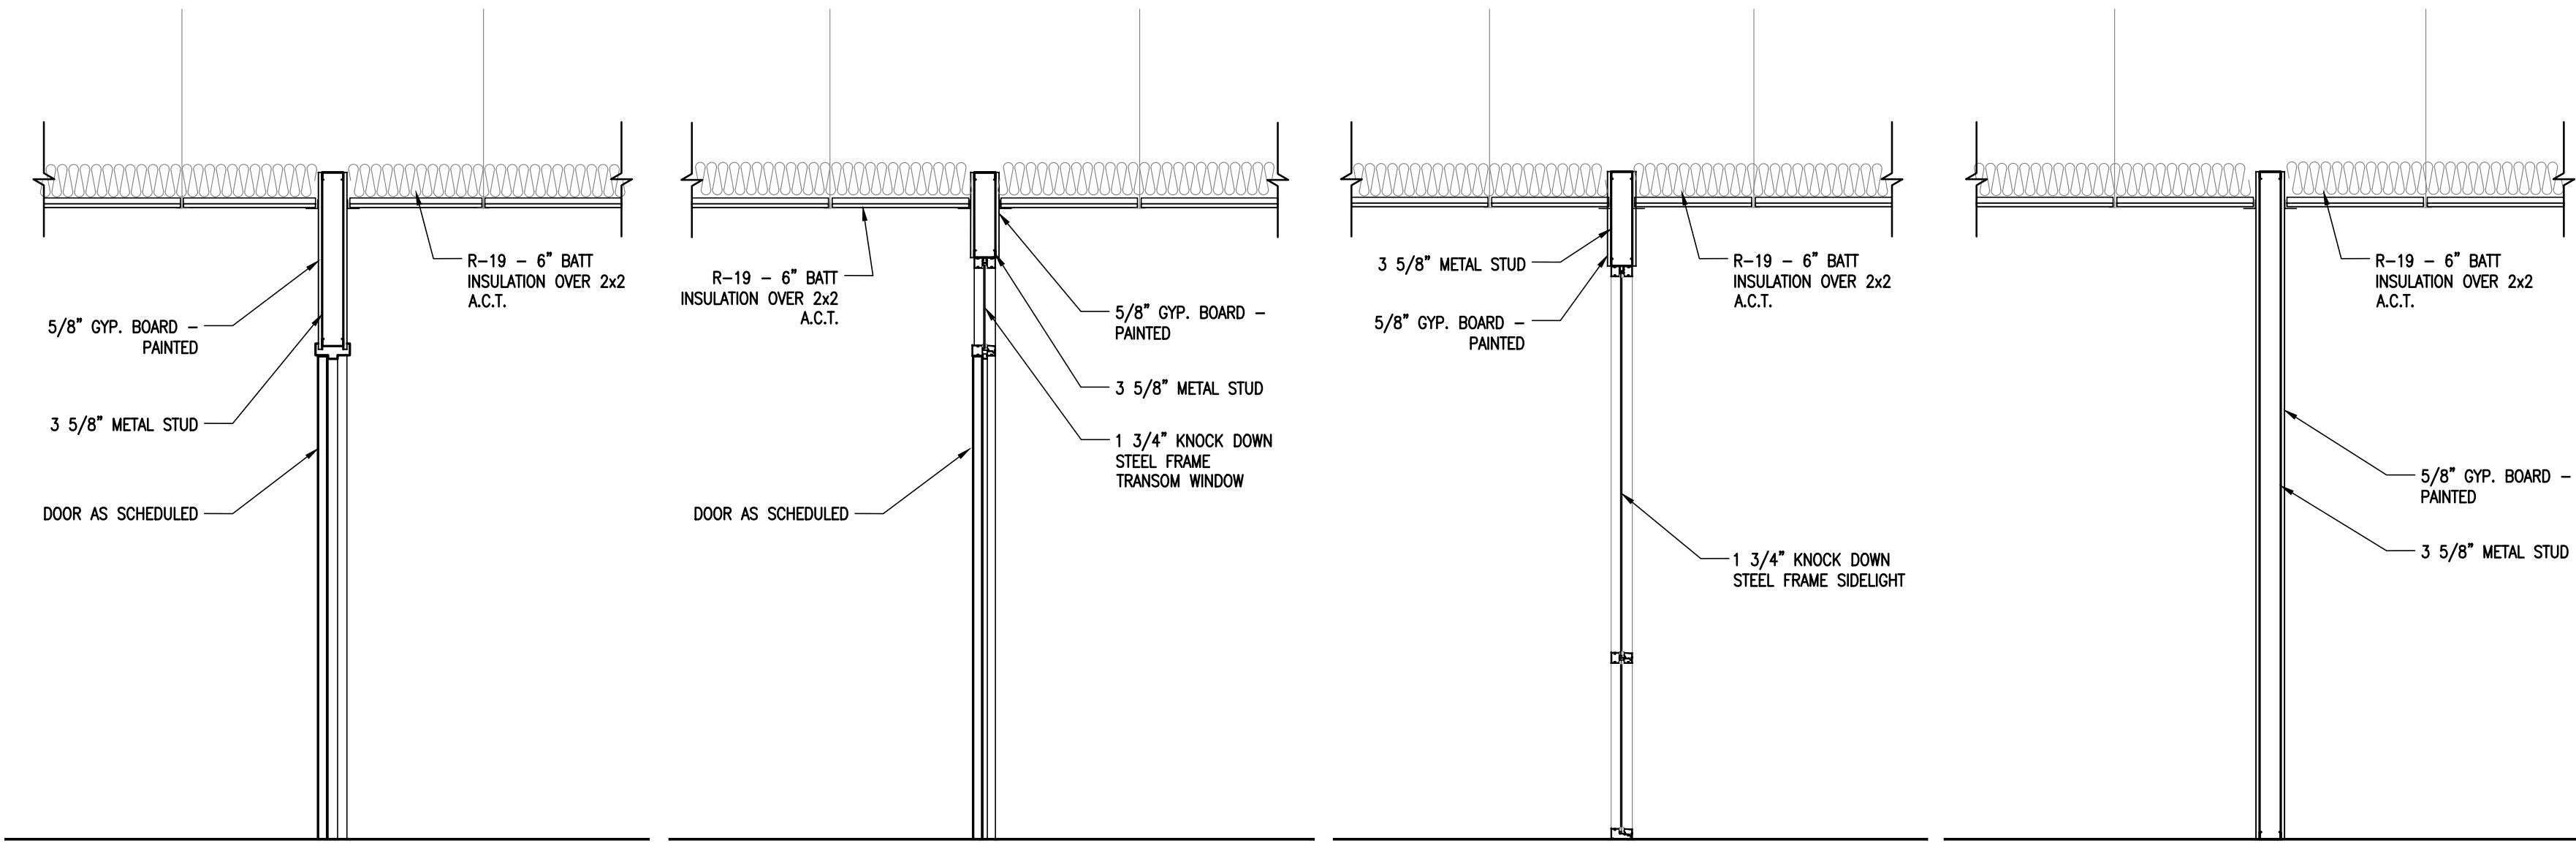


07 WALL SECTION SCALE: 1/2"=1'-0"
06 WALL SECTION SCALE: 1/2"=1'-0"
05 WALL SECTION SCALE: 1/2"=1'-0"
04 WALL SECTION SCALE: 1/2"=1'-0"

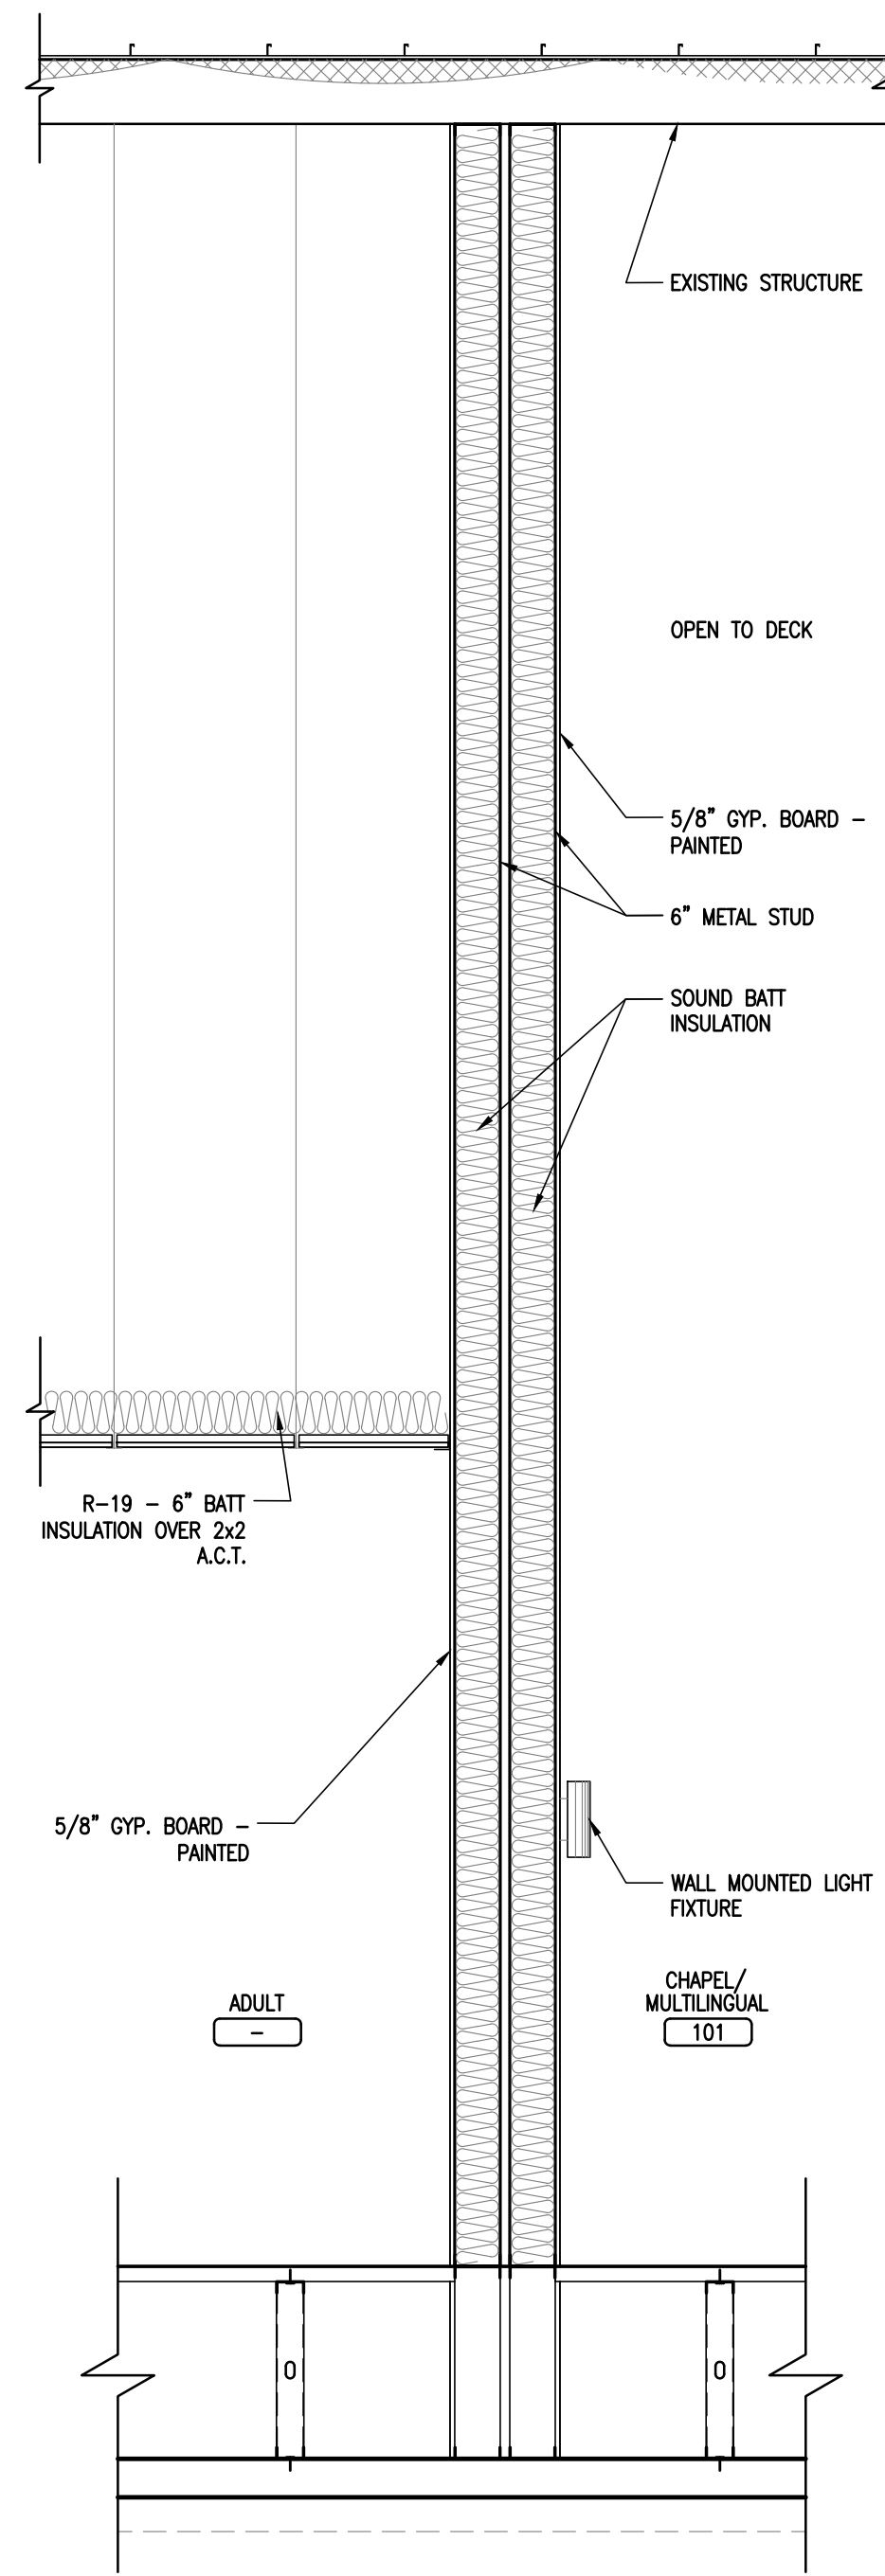


03 WALL SECTION SCALE: 1/2"=1'-0"

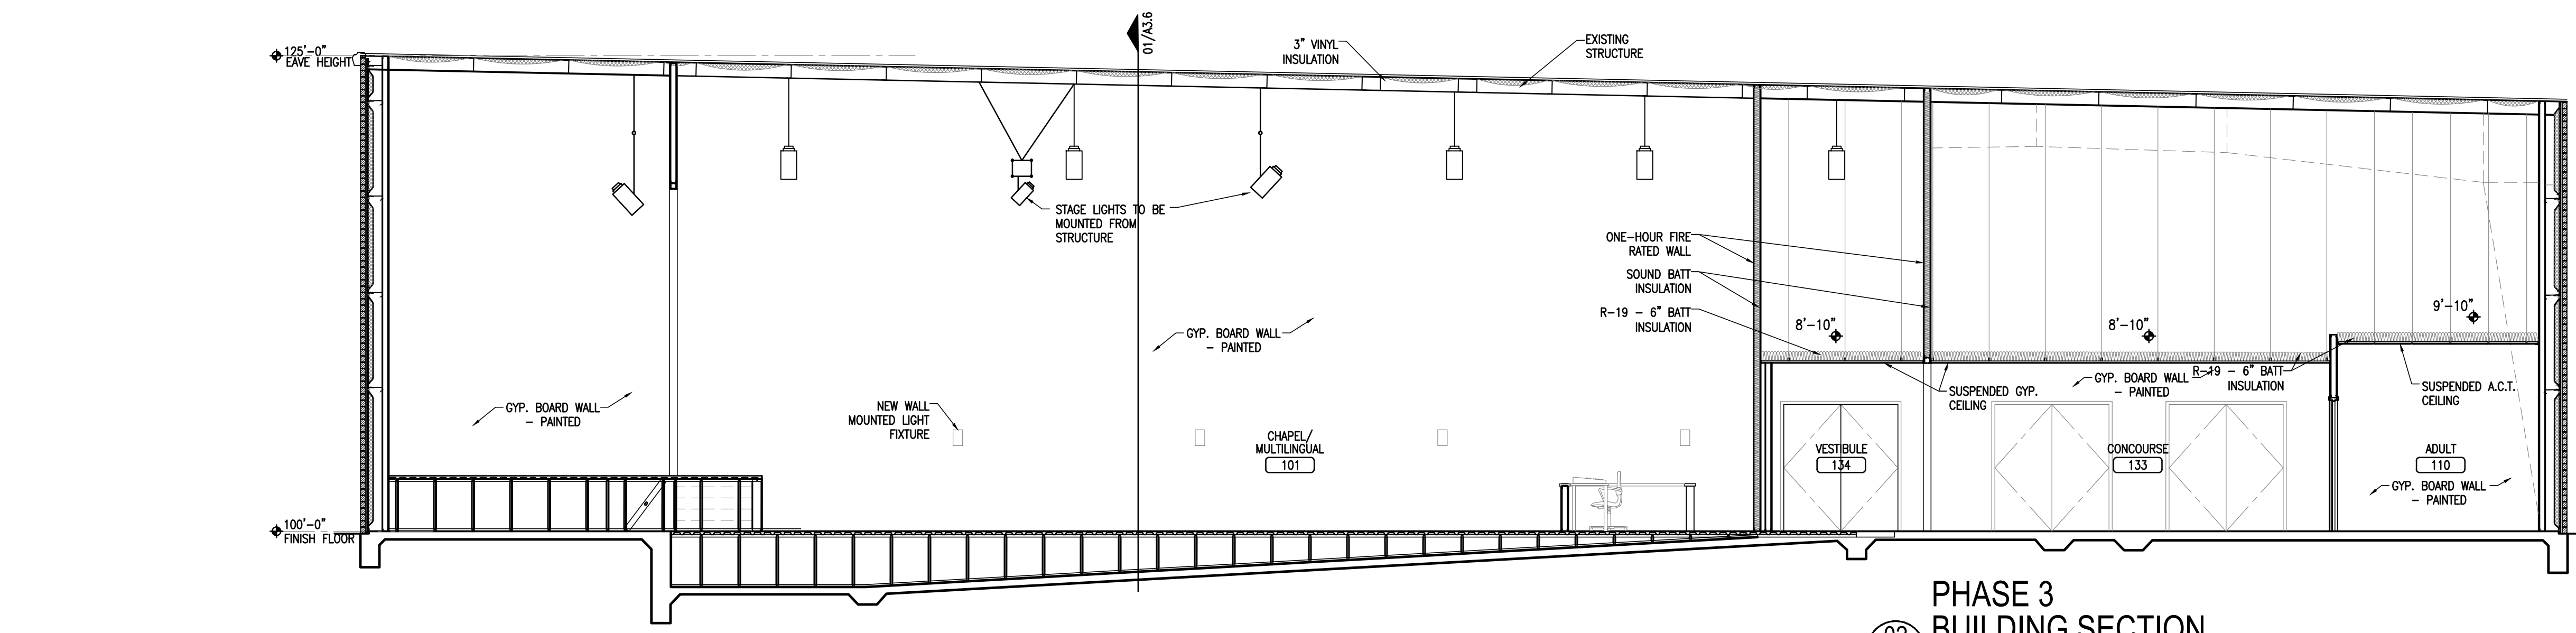


02 PHASE 3 BUILDING SECTION SCALE: 3/16"=1'-0"

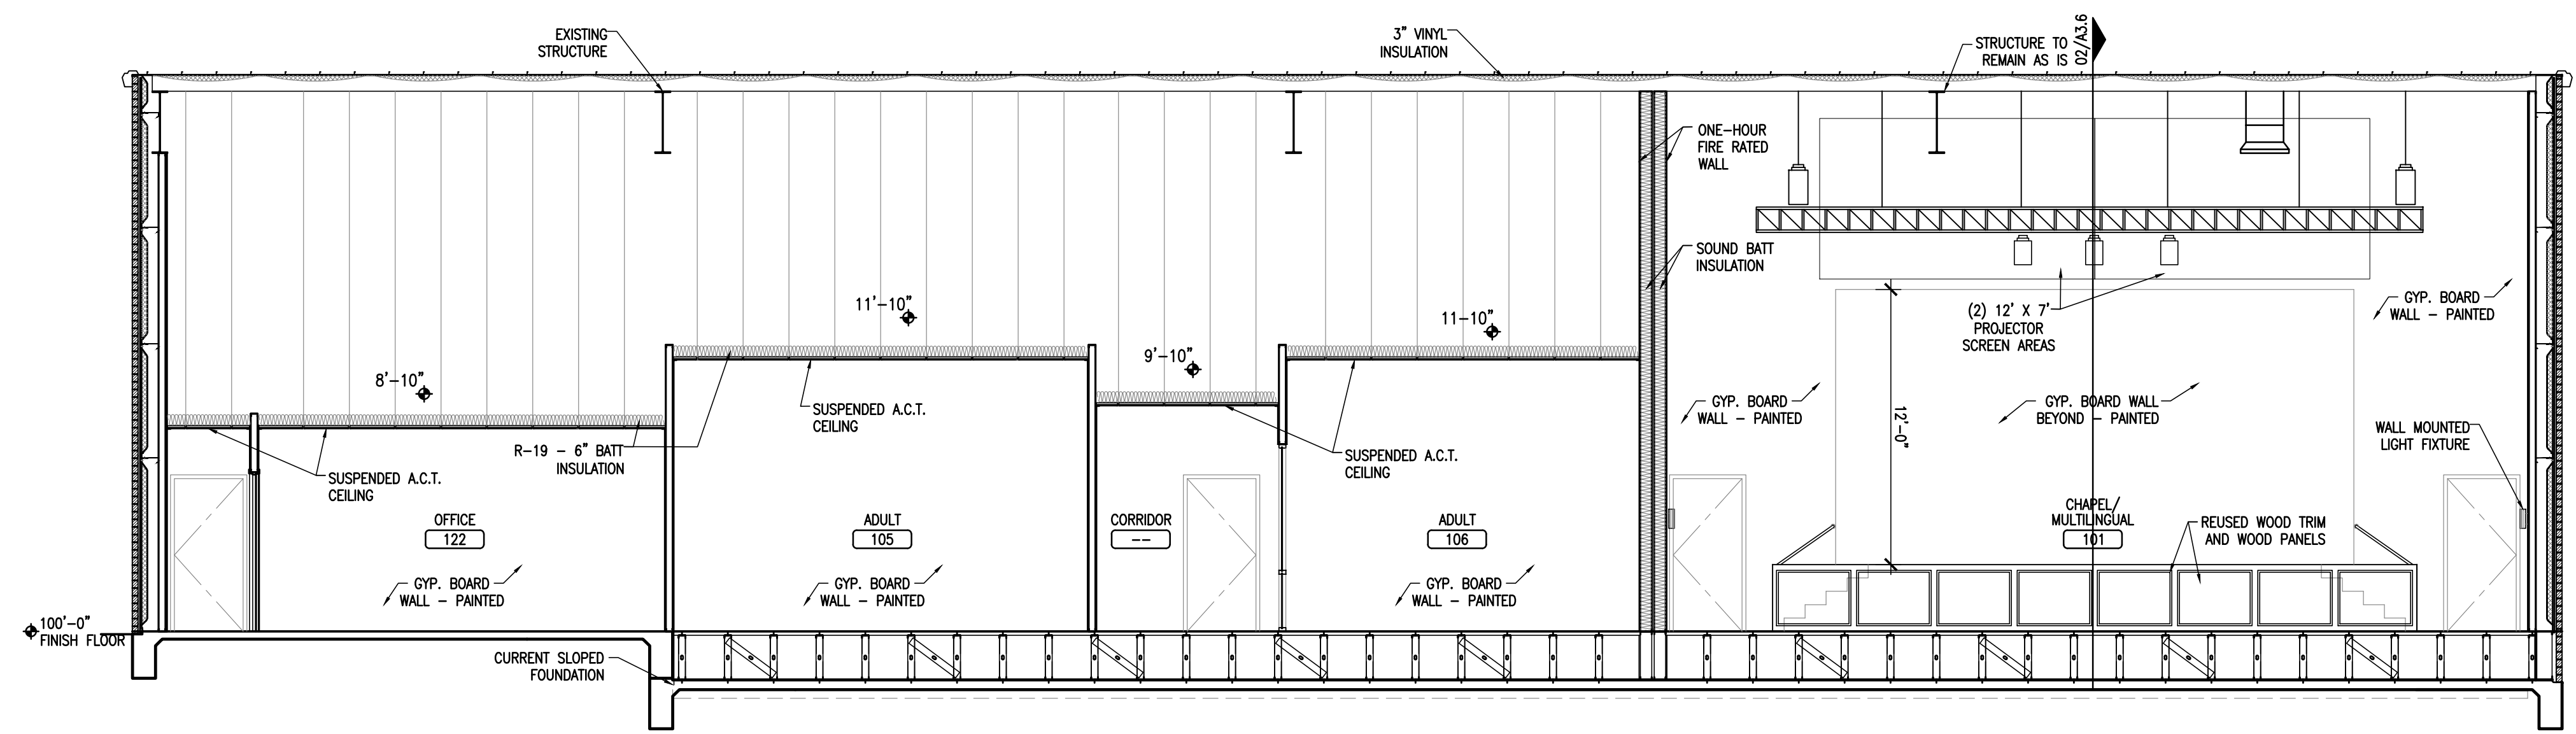

01 PHASE 3 BUILDING SECTION SCALE: 3/16"=1'-0"

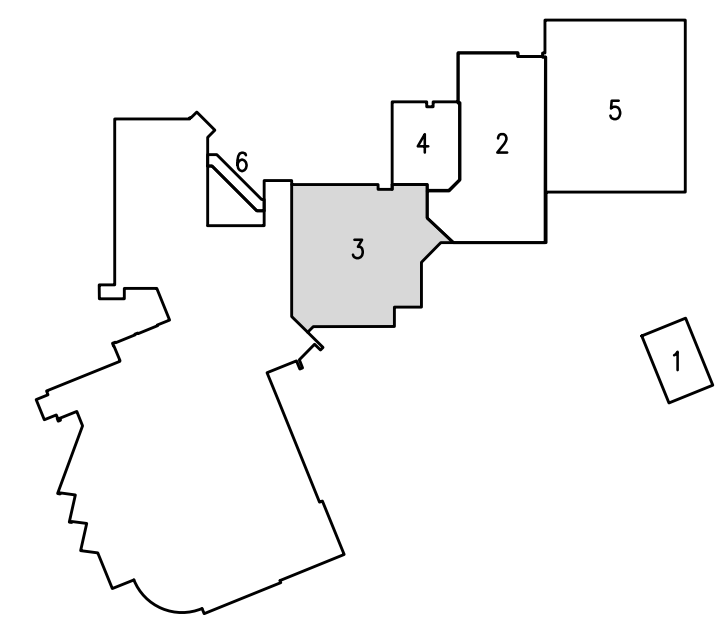



PHASING/ KEY PLAN

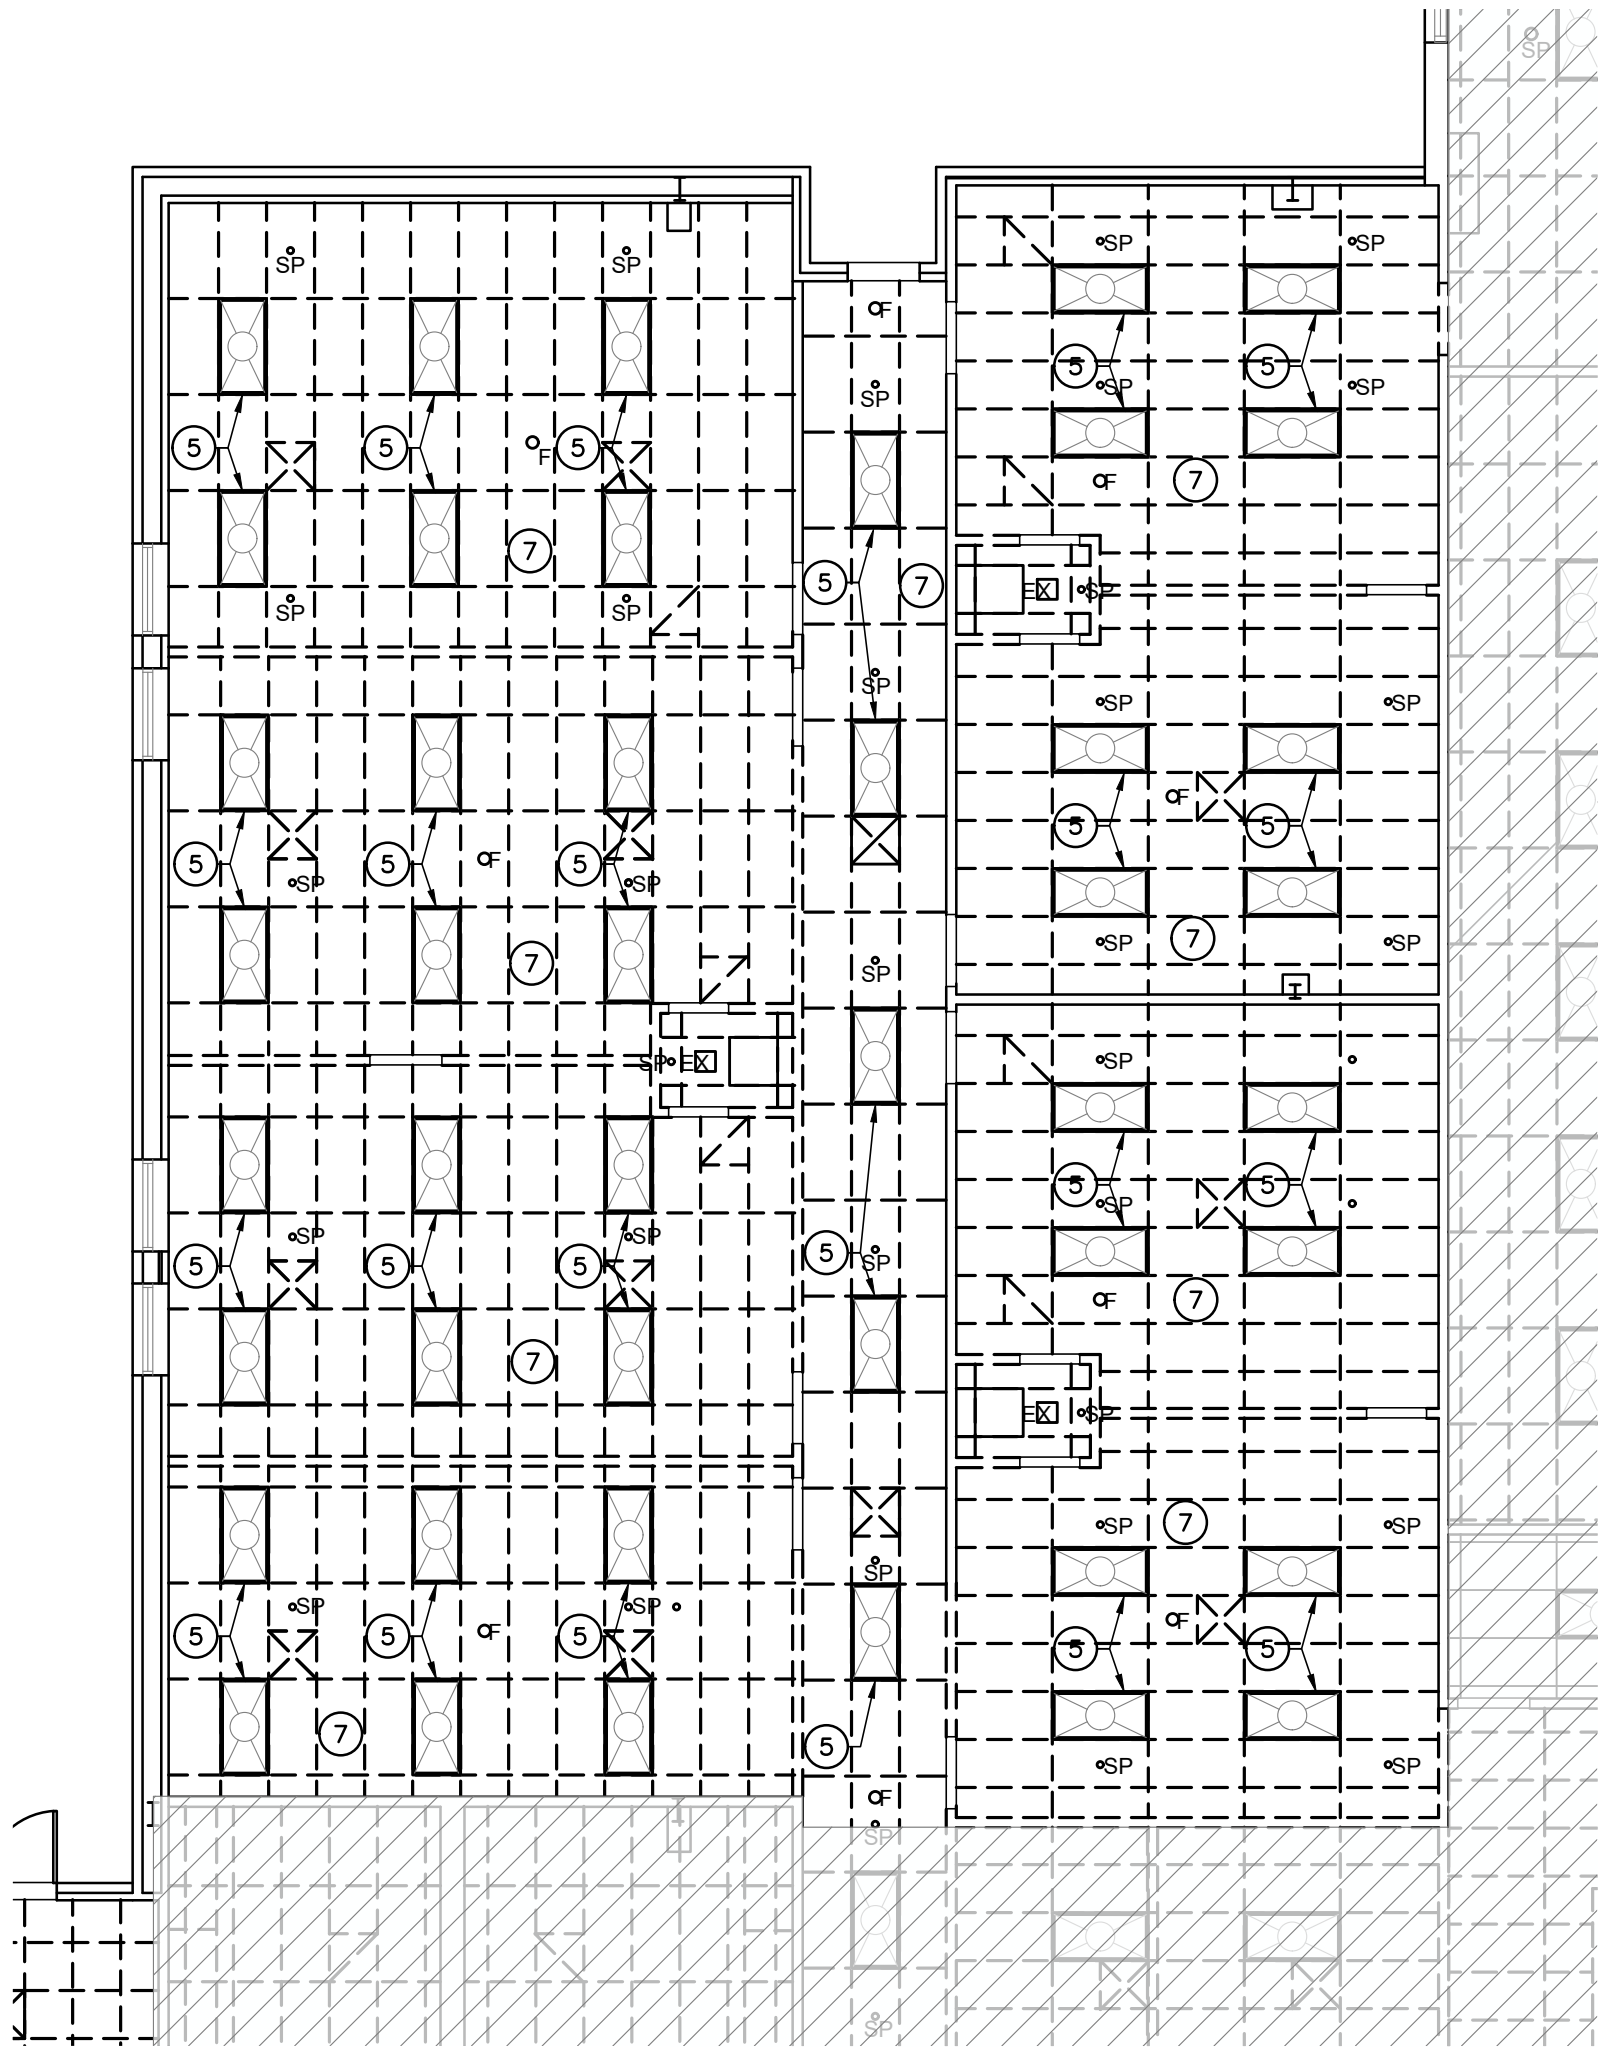

 NORTH

02 PHASE 4 DEMO RCP
A4.0 SCALE: 1/8"=1'-0"

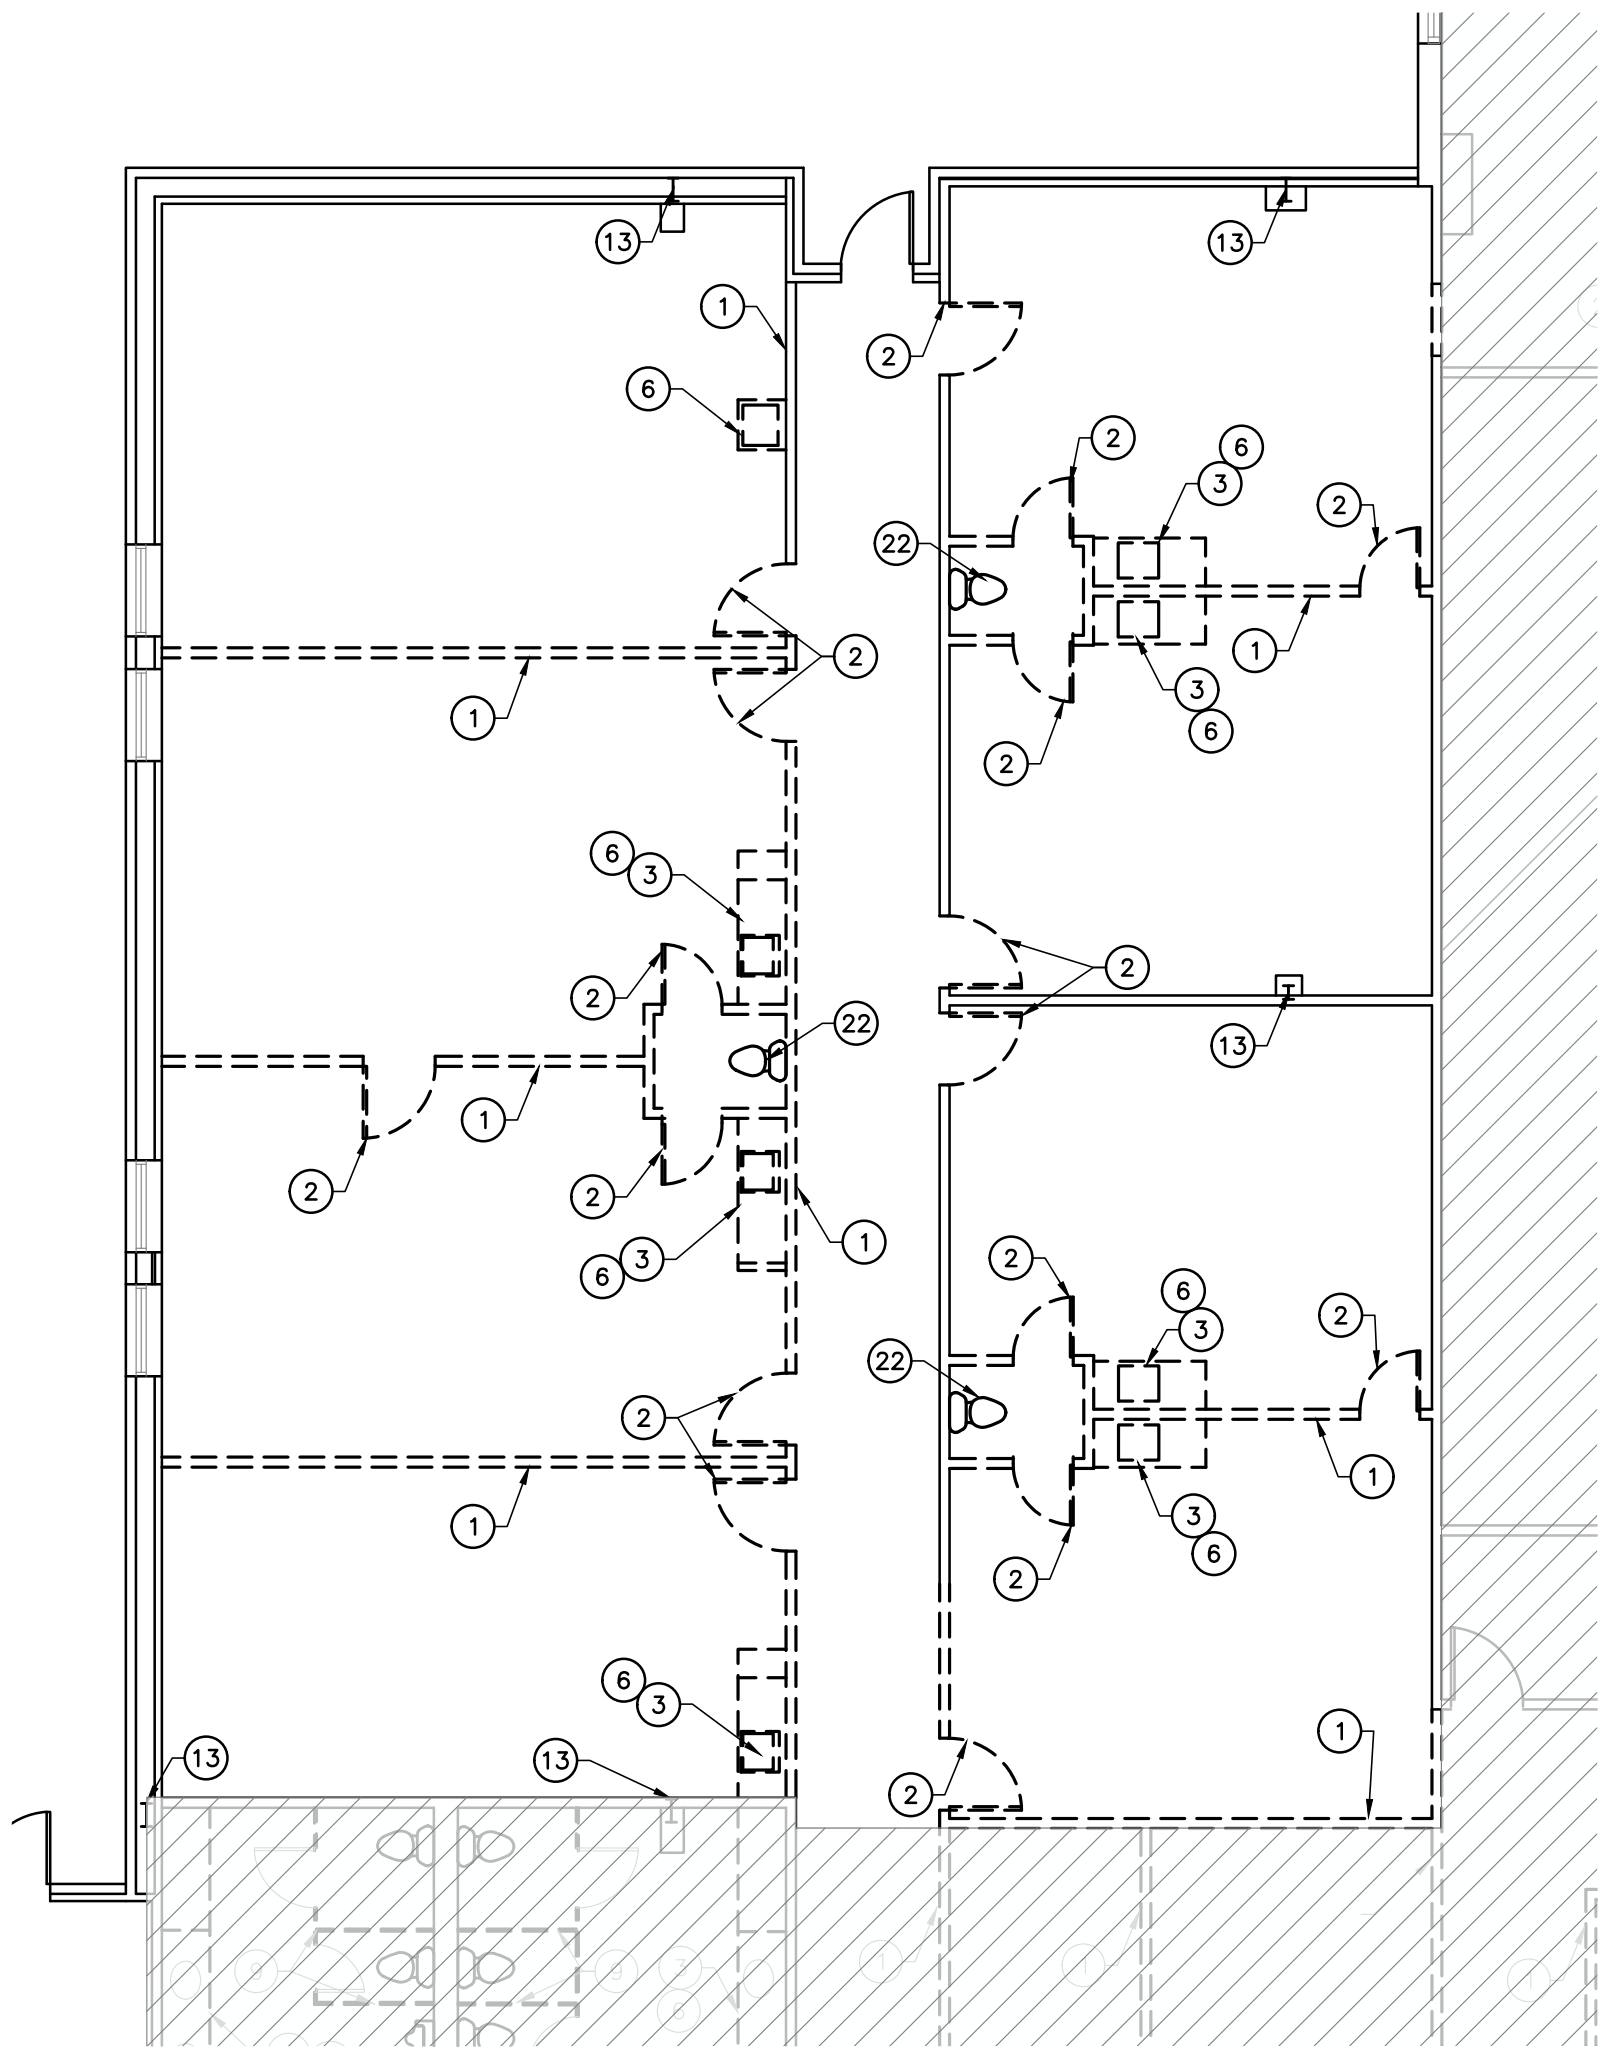




 NORTH

01 PHASE 4 DEMO PLAN
A4.0 SCALE: 1/8"=1'-0"


- ### GENERAL DEMOLITION NOTES
1. REMOVE BUILDING ELEMENTS AS INDICATED AND TO THE EXTENT NECESSARY TO ACCOMPLISH THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. ELECTRICAL AND PLUMBING FIXTURES AND DEVICES REMOVED DURING DEMOLITION SHALL INCLUDE THE REMOVAL OF ALL ASSOCIATED WIRES, CONDUIT, AND LINES IN THEIR ENTIRETY BACK TO THE SOURCE OR TO UNDER A POINT OUT OF CONFLICT WITH THE NEW WORK AND OUT OF SIGHT.
 2. ALL MATERIALS, FIXTURES, ETC. INDICATED TO BE REMOVED SHALL BE DISPOSED OF PROPERLY OFF SITE BY THE CONTRACTOR UNLESS NOTED OTHERWISE.
 3. REMOVE BUILDING ELEMENTS IN SUCH A MANNER TO FACILITATE THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. PREPARE ALL SURFACES TO RECEIVE NEW FINISH AS SCHEDULED.
 4. CONTRACTOR TO DETERMINE LOAD BEARING WALLS PRIOR TO DEMOLITION. RESHORE AS NECESSARY DURING ALL PHASES OF WORK.
 5. COORDINATE WITH FACILITIES MANAGEMENT FOR REMOVAL, STORAGE, AND RELOCATION OF FACILITY FURNITURE, FIXTURES, AND EQUIPMENT DURING CONSTRUCTION.
 6. PROTECT EXISTING CONSTRUCTION TO REMAIN FROM DEMOLITION PROCESS INCLUDING DUST AND DAMAGE CAUSED BY FOOT TRAFFIC.
 7. PATCH AND REPAIR ALL EXISTING WALLS AND CEILINGS TO REMAIN WITH TEXTURE TO MATCH EXISTING. PREPARE SURFACES FOR NEW PAINT.
 8. DOORS, FRAMES AND HARDWARE REMOVED DURING DEMOLITION SHALL BE SALVAGED FOR REUSE. COORDINATE WITH NEW DOOR SCHEDULE REQUIREMENTS. REFURBISH EXISTING DOORS AND FRAMES REUSED.
 9. LIGHT FIXTURES AND CEILING MOUNTED DEVICES AND EQUIPMENT SHALL BE REMOVED OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY. REF. REFLECTED CEILING PLAN AND MEP FOR FULL SCOPE OF NEW CONSTRUCTION.
 10. MECHANICAL AIR DIFFUSER/RETURN TO BE RELOCATED OR REMOVED TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY.
 11. FIRE SPRINKLERS AND ALARMS SHALL BE MODIFIED AND/OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUTS. CONTRACTOR TO FIELD VERIFY.
 12. REMOVE ALL FLOORING THROUGHOUT, U.O.N. FLOORING INCLUDES CARPET, WOOD FLOORING, VCT AND SHEET VINYL. WALL BASE INCLUDES WOOD BASE, VINYL BASE AND CARPET BASE.
 13. PER STATE LAW, AN ASBESTOS SURVEY MUST BE PERFORMED AND ANY MATERIAL FOUND TO BE AFFECTED BY CONSTRUCTION THAT ASBESTOS MUST BE PROPERLY ABATED.
 14. ITEMS TO BE REMOVED OR DEMOLISHED SHOWN DASHED AND BOLD.

- ### DEMOLITION NOTES BY NUMBERS
1. REMOVE EXISTING WALL (DASHED).
 2. REMOVE AND COORDINATE THE REUSE OF DOOR FRAME AND HARDWARE IN NEW LOCATION.
 3. REMOVE EXISTING CABINETRY.
 4. REMOVE EXISTING WINDOW.
 5. REMOVE EXISTING LIGHT FIXTURE(S).
 6. REMOVE EXISTING PLUMBING FIXTURE.
 7. REMOVE EXISTING LAY-IN CEILING.
 8. EXISTING CEILING AND LIGHTING TO REMAIN.
 9. REMOVE EXISTING TOILET PARTITIONS.
 10. REMOVE EXISTING CARPET AND/OR VINYL FLOORING.
 11. REMOVE AND RELOCATE EXISTING PAPER TOWEL DISPENSER.
 12. REMOVE AND COORDINATE THE REUSE OF 2x2 A.C.T. CEILING.
 13. STRUCTURAL COLUMN, PROTECT DURING CONSTRUCTION.
 14. REMOVE WALL TO CREATE OPENING FOR NEW EXTERIOR DOOR AND FRAME.
 15. REMOVE BAPTISTERY.
 16. REMOVE ROLLING COUNTER SHUTTER.
 17. REMOVE PORTION OF CONCRETE SLAB FOR NEW PLUMBING.
 18. DISMANTLE AND REMOVE PORTABLE DESK.
 19. REMOVE EXISTING STEEL DOOR(S) AND FRAME.
 20. EXISTING CONCRETE BASE TO BE REMOVED AND REPLACED.
 21. CONDENSING UNIT TO BE REMOVED AND RELOCATED.
 22. REMOVE AND COORDINATE THE REUSE OF BABY TOILET BOWLS.
 23. PROTECT AND PRESERVE WALL MURAL DURING DEMOLITION AND CONSTRUCTION.

DEMOLITION LEGEND

	EXISTING TO REMAIN
	TO BE DEMOLISHED/ REMOVED
	NO DEMOLITION SCOPE WITHIN THIS AREA IN THIS PHASE

AREA PER PHASE	
PHASE 4	4,430 SQ. FT.

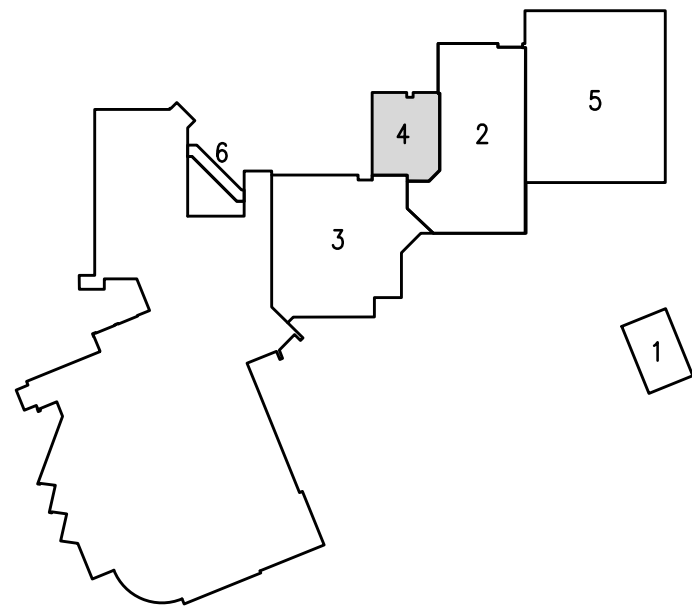

 NORTH

KEY PLAN

NORTHWOOD CHURCH RENOVATIONS

1870 RUFE SNOW DR.
KELLER, TEXAS 76248



DATE: 08/14/24

ISSUE:

-

REVISION:

△ REVISED 04-30-25

-

-

-

SHEET TITLE:

PHASE 4 DEMO
FLOOR PLAN

A4.0

ARCHITECTURE
PLANNING
INTERIOR DESIGN

GHILA

1300 WEST RANDOL MILL ROAD, ARLINGTON, TEXAS 76012
817.801.7200
www.ghila-inc.com

GENERAL FLOOR PLAN NOTES

- REFER TO MEP DRAWINGS FOR MORE INFORMATION.
- ALL DIMENSIONS ARE TO FACE OF STUD OR TO FACE OF MASONRY UNLESS NOTED OTHERWISE. MASONRY DIMENSIONS ARE NOMINAL UNLESS NOTED OTHERWISE.
- CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND INFORM THE OWNER AND ARCHITECT OF ANY CONFLICT PRIOR TO THE COMMENCEMENT OF WORK.
- PROVIDE WOOD BLOCKING FOR ALL ITEMS OR EQUIPMENT FASTENING INTO DRYWALL PARTITIONS, TYPICAL. FOR TV LOCATIONS, PROVIDE 12" HIGH X 16" WIDE BLOCKING W/ CENTER AT 60" A.F.F. FOR BEDSIDE TV'S PROVIDE BLOCKING AS RECOMMENDED BY MANUFACTURER.
- ALL PUBLIC USE DOORS SHALL HAVE HC ACCESSIBLE CLEAR FLOOR SPACE. NOTIFY ARCHITECT OF ANY CONFLICT TO COMPLIANCE.
- REFER TO SHEET G2.1 & G2.2 FOR ACCESSIBILITY REQUIREMENT INCLUDING CLEAR FLOOR SPACE, MOUNTING HEIGHTS, CABINET CLEARANCES, ETC., THAT MUST BE MAINTAINED.
- SEAL ALL PENETRATIONS IN RATED ASSEMBLIES TO MAINTAIN THE REQUIRED RATING.
- WHERE WALLS AND PARTITIONS ARE REQUIRED TO HAVE A 1 HOUR FIRE RATED ASSEMBLY, STEEL ELECTRICAL BOXES ON OPPOSITE SIDES OF THE WALL SHALL BE SEPARATED BY THE FOLLOWING:
 - BY HORIZONTAL DISTANCE OF NOT LESS THAN 24 INCHES.
 - BY SOLID FIRE BLOCKING IN ACCORDANCE WITH SECTION 717.2.1 OF 2018 INTERNATIONAL BUILDING CODE, WHICH STATES THAT FIRE BLOCKING MATERIALS SHALL CONSIST OF 2-INCH NOMINAL LUMBER.
 - BY PROTECTING BOTH OUTLET BOXES WITH LISTED PUTTY PADS.
- WHERE OCCUPIED SPACES ARE OPEN TO DECK, EXPOSED STRUCTURE, PIPE, DUCTWORK, AND DRYWALL SHALL BE PREPARED FOR PAINT.
- FLOORING TRANSITIONS BETWEEN ROOMS SHALL OCCUR BENEATH DOORS IN THE CLOSED POSITIONS, TYP.

FLOOR PLAN NOTES BY NUMBER (○)

- NEW METAL FRAMED WALL. SEE WALL SECTIONS FOR ADDITIONAL INFORMATION.
- NEW ALUMINUM FRAME AND GLASS PARTITION WALLS
- NEW EXTERIOR INFILL WALL TO MATCH EXISTING.
- RELOCATE EXISTING STOREFRONT DOOR & WINDOW UNITS.
- EXTEND NEW & EXISTING WALLS FULL HEIGHT TO DECK.
- REMOVE DOOR AND FRAME AND RE-INSTALL IN NEW WALL CONFIGURATION.
- BABY TOILET BOWLS TO BE REUSED/ADDED TO TOILET ROOMS 309, 310, 311, & 312.

GENERAL RCP NOTES

- ALL 1 HOUR PARTITION WALLS SHALL TERMINATE TO THE BOTTOM OF THE 1-HOUR ROOF/CEILING ASSEMBLY.
- ALL PENETRATIONS THROUGH RATED WALLS SHALL BE FIRE-STOPPED AS REQUIRED TO MAINTAIN WALL RATING.
- COORDINATE LIGHT FIXTURE LOCATIONS WITH DOORS, MECHANICAL EQUIPMENT AND FIRE SPRINKLERS. NOTIFY THE ARCHITECT IF THERE IS A DISCREPANCY.
- RELOCATE EXISTING HVAC AIR DEVICES AS REQUIRED. EXTEND OR OTHERWISE MODIFY DUCTWORK TO MAINTAIN PROPER PERFORMANCE OF THE SYSTEM.
- RELOCATE FIRE SUPPRESSION SPRINKLER HEADS AS REQUIRED. EXTEND OR MODIFY PIPING AS REQUIRED TO RESULT IN A CODE COMPLIANT SYSTEM. THE SPRINKLER CONTRACTOR SHALL PROVIDE ENGINEERED DESIGN AND SUBMIT TO THE CITY FOR APPROVAL.

RCP NOTES BY NUMBER (⊕)

- 2x2 A.C.T SUSPENDED CEILING W/ 6" R-19 FIBERGLASS INSULATION OVER.
- NEW 1-HR FIRE RATED GYPSUM BOARD CEILING, GA FILE NO. RC-2601. RE: RCP AND DETAILS.
- EXISTING CEILING AND LIGHTING TO REMAIN.
- REPLACE FABRIC ON EXISTING METAL AWNING STRUCTURE.
- LIGHT COVE WITH LED COVE STRIP LIGHT.
- CEILING OPEN TO DECK.
- PENDANT LIGHTING SUSPENDED FROM ROOF STRUCTURE.
- DECORATIVE RECESSED WOOD RAFTERS/BEAMS.
- SUSPENDED LINEAR LIGHT FIXTURE.
- EXISTING LIGHTING FIXTURE TO REMAIN.

P4 ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLOOR	BASE	WALLS	CEILING	NOTES
114	CLASSROOM	CPT	VB	P	ACT	
115	CLASSROOM	CPT	VB	P	ACT	
116	JOY/MULTI-ABILITY	CPT	VB	P	OPEN	
117	CLASSROOM	CPT	VB	P	ACT	
118	CLASSROOM	CPT	VB	P	ACT	
119	CLASSROOM	CPT	VB	P	ACT	
143	CORRIDOR	LVP	VB	P	ACT	
144	TOILET	LVP	VB	EPX	ACT	
145	STORAGE	LVP	VB	P	ACT	
146	TOILET	LVP	VB	EPX	ACT	

FLOORING

CPT	CARPET TILE
LVP	LUXURY VINYL PLANK
ETR	EXISTING TO REMAIN
PT	PORCELAIN TILE
SC	SEALED CONCRETE

BASE:

VB	VINYL BASE
P	PAINT AND TEXTURE ON GYP. BD.
CT	PORCELAIN TILE
EPX	EPOXY PAINT COATING
LAY-IN	LAY-IN ACOUSTICAL TILE

CEILING:

P	PAINT AND TEXTURE ON GYP. BD.
LAY-IN	LAY-IN ACOUSTICAL TILE

GENERAL NOTES:

- REFER TO INTERIOR ELEVATIONS FOR ADDITIONAL INFO.
- BASE IN BATHROOMS SHALL BE 4" TALL.

P4 DOOR SCHEDULE

DOOR NO.	TYPE	SIZE	MATL	FRAME	FIRE	HW
114	5	3'-0" X 7'-0"	WD	D STL		1
115	5	3'-0" X 7'-0"	WD	D		EXIST.
116	5	3'-0" X 7'-0"	WD	D STL		1
117	5	3'-0" X 7'-0"	WD	D STL		1
118	5	3'-0" X 7'-0"	WD	D STL		1
119	5	3'-0" X 7'-0"	WD	D STL		1
144	5	3'-0" X 7'-0"	WD	D STL		5
145	5	3'-0" X 7'-0"	WD	D STL		3
146	5	3'-0" X 7'-0"	WD	D STL		5
501A	5	3'-0" X 7'-0"	WD	D STL		1

GENERAL NOTES

- ALL DOORS TO BE 1 3/4" U.N.O.
- EXIT DEVICES SHALL COME WITH LOCKING LOCKSET ON OPPOSING SIDE OF DOOR
- DOOR SURFACES WITHIN 10" OF THE FINISH FLOOR OR GROUND MEASURED VERTICALLY SHALL HAVE A SMOOTH SURFACE ON THE PUSH SIDE EXTENDING THE FULL WIDTH OF THE DOOR
- ALL DOORS ARE TO BE PAINTED EXCEPT FOR DOORS IN PHASE 1.
- NO VISION PANELS ON TOILET ENTRY DOORS.

DOOR/FRAME MATERIAL

PLAM	PLASTIC LAMINATE CLAD	STL	STEEL
HM	HOLLOW/PRESSED METAL	ALUM.	ALUMINUM STOREFRONT
MTL	METAL		
	RELOCATE EXIST. EXTERIOR DOORS		

RCP LEGEND

- 2x4 LAY-IN TROFFER LED LIGHT FIXTURE
- 2x2 LAY-IN TROFFER LED LIGHT FIXTURE
- SURFACE MOUNT LED LIGHT FIXTURE
- WALL PACK
- SCONCE WALL MOUNT FIXTURE
- PENDANT WALL MOUNT FIXTURE
- LED COVE STRIP LIGHT
- WALL MOUNTED LIGHT FIXTURE
- PENDANT LIGHT/ CHANDELIER
- RECESSED DOWNLIGHT FIXTURE
- EXIT LIGHT
- SUSPENDED CEILING
- AREA NOT AFFECTED DURING THIS PHASE


TOILET ACCESSORIES

- TA1 ENMOTION PAPER TOWEL DISPENSER - WALL MOUNTED
- TA2 TOILET TISSUE DISPENSER - DOUBLE ROLL
- TA3 36" GRAB BAR
- TA4 42" GRAB BAR
- TA5 AUTOMATIC SOAP DISPENSER - DECK MOUNTED
- TA6 SANITARY NAPKIN DISPOSAL UNIT
- TA7 24" X 36" WALL MOUNTED MIRROR
- TA8 SOAP DISPENSER - WALL MOUNTED
- TA9 UNFRAMED MIRROR
- SPECIFIC ACCESSORIES LISTED IN SECTION 10 28 13

CLEAR FLOOR SPACE

- 60" TURNING DIAMETER
- 30" x 48" CLEAR FLOOR SPACE
- 60" x 56" CLEAR FLOOR SPACE
- 48" x 60" CLEAR FLOOR SPACE
- 36" x 48" CLEAR FLOOR SPACE
- 36" x 60" CLEAR FLOOR SPACE
- 42" x 58" CLEAR FLOOR SPACE
- 54" x 60" CLEAR FLOOR SPACE
- 48" x 48" CLEAR FLOOR SPACE
- 58" x 42" CLEAR FLOOR SPACE

REMOVED SIDE WINDOWS NEXT TO ENTRY DOOR AT CHILDREN'S CLASSROOMS (114, 115, 117, 118, & 119)

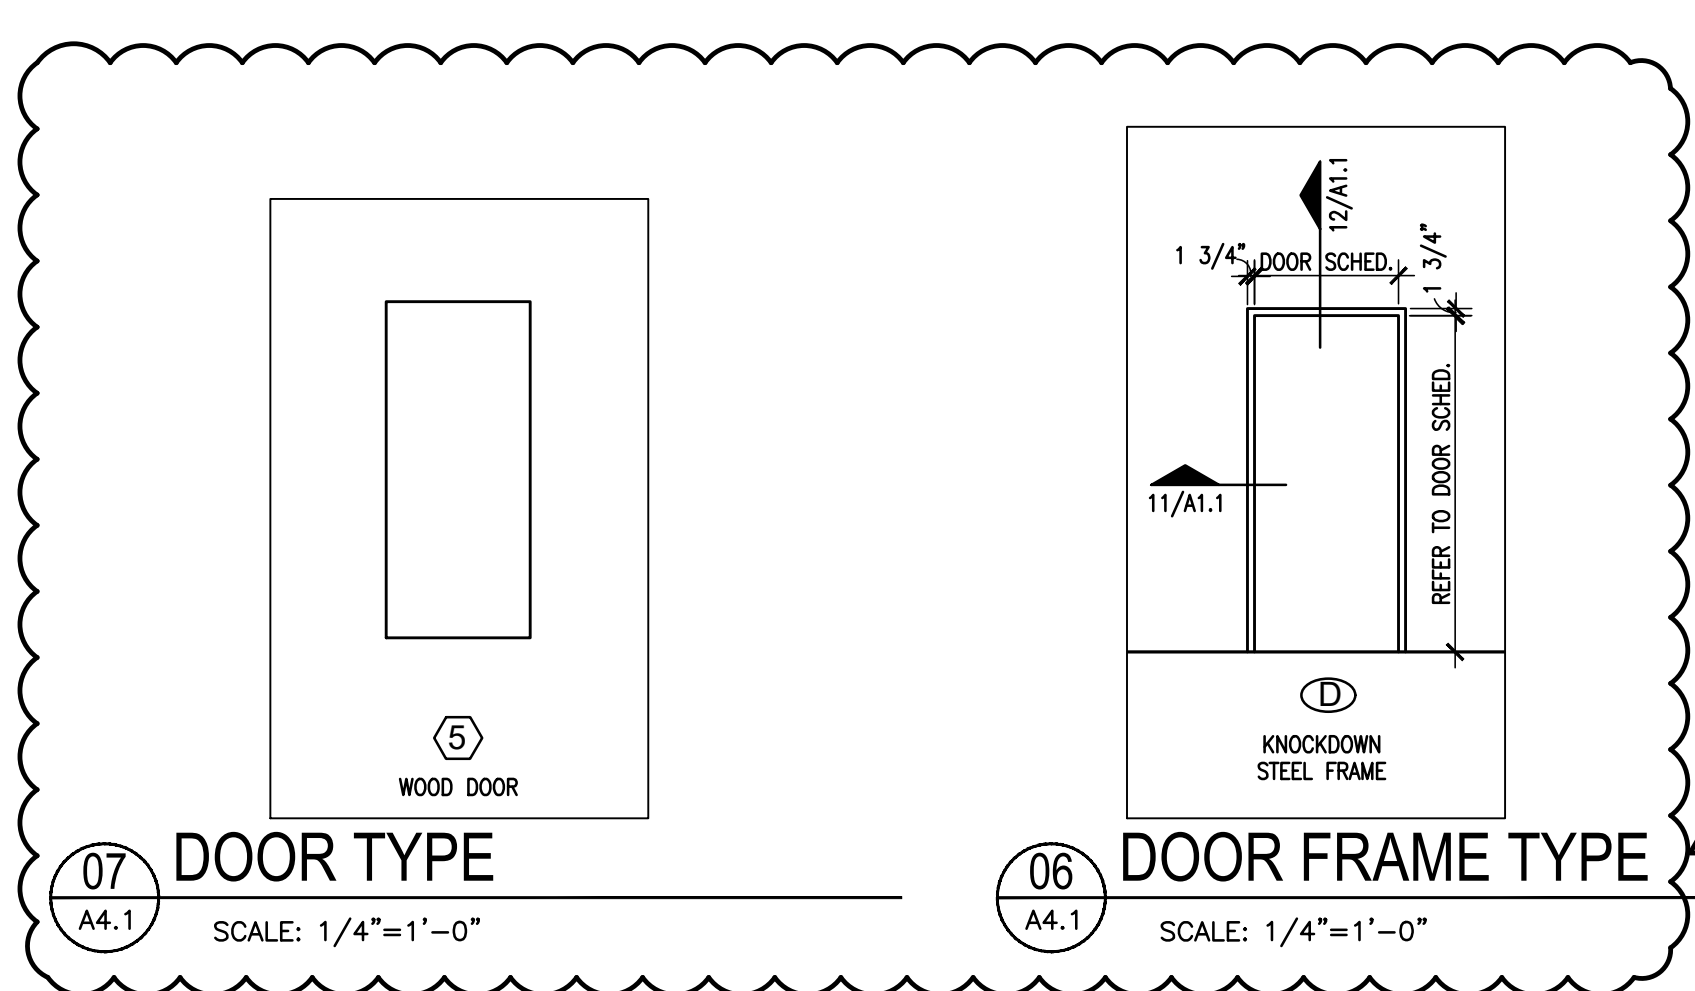


DOOR TYPE

SCALE: 1/4"=1'-0"


DOOR FRAME TYPE

SCALE: 1/4"=1'-0"

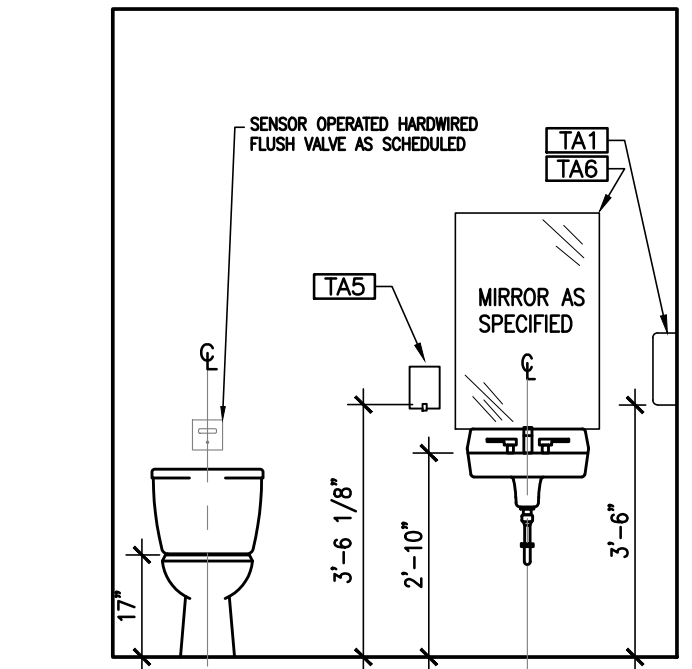


INT. ELEVATION - TOILET

SCALE: 3/8"=1'-0"

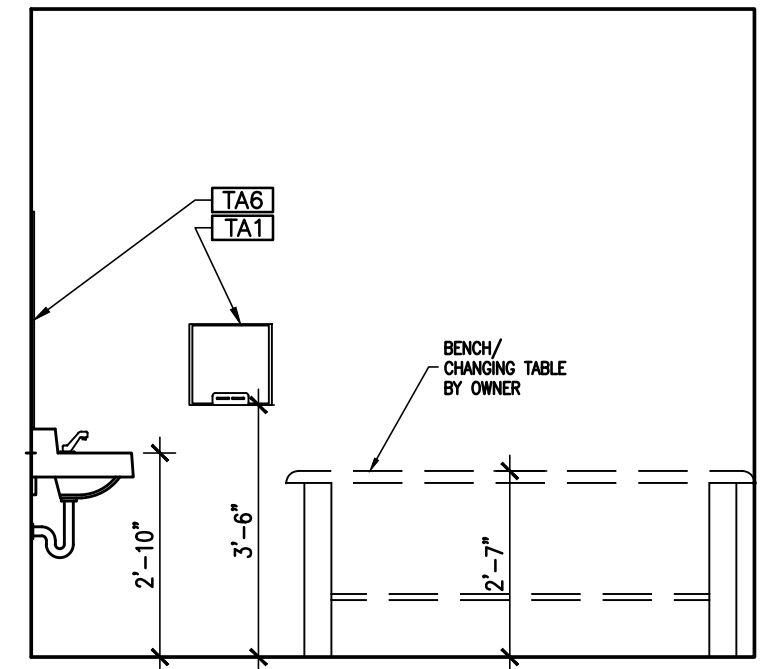


INT. ELEVATION - TOILET

SCALE: 3/8"=1'-0"

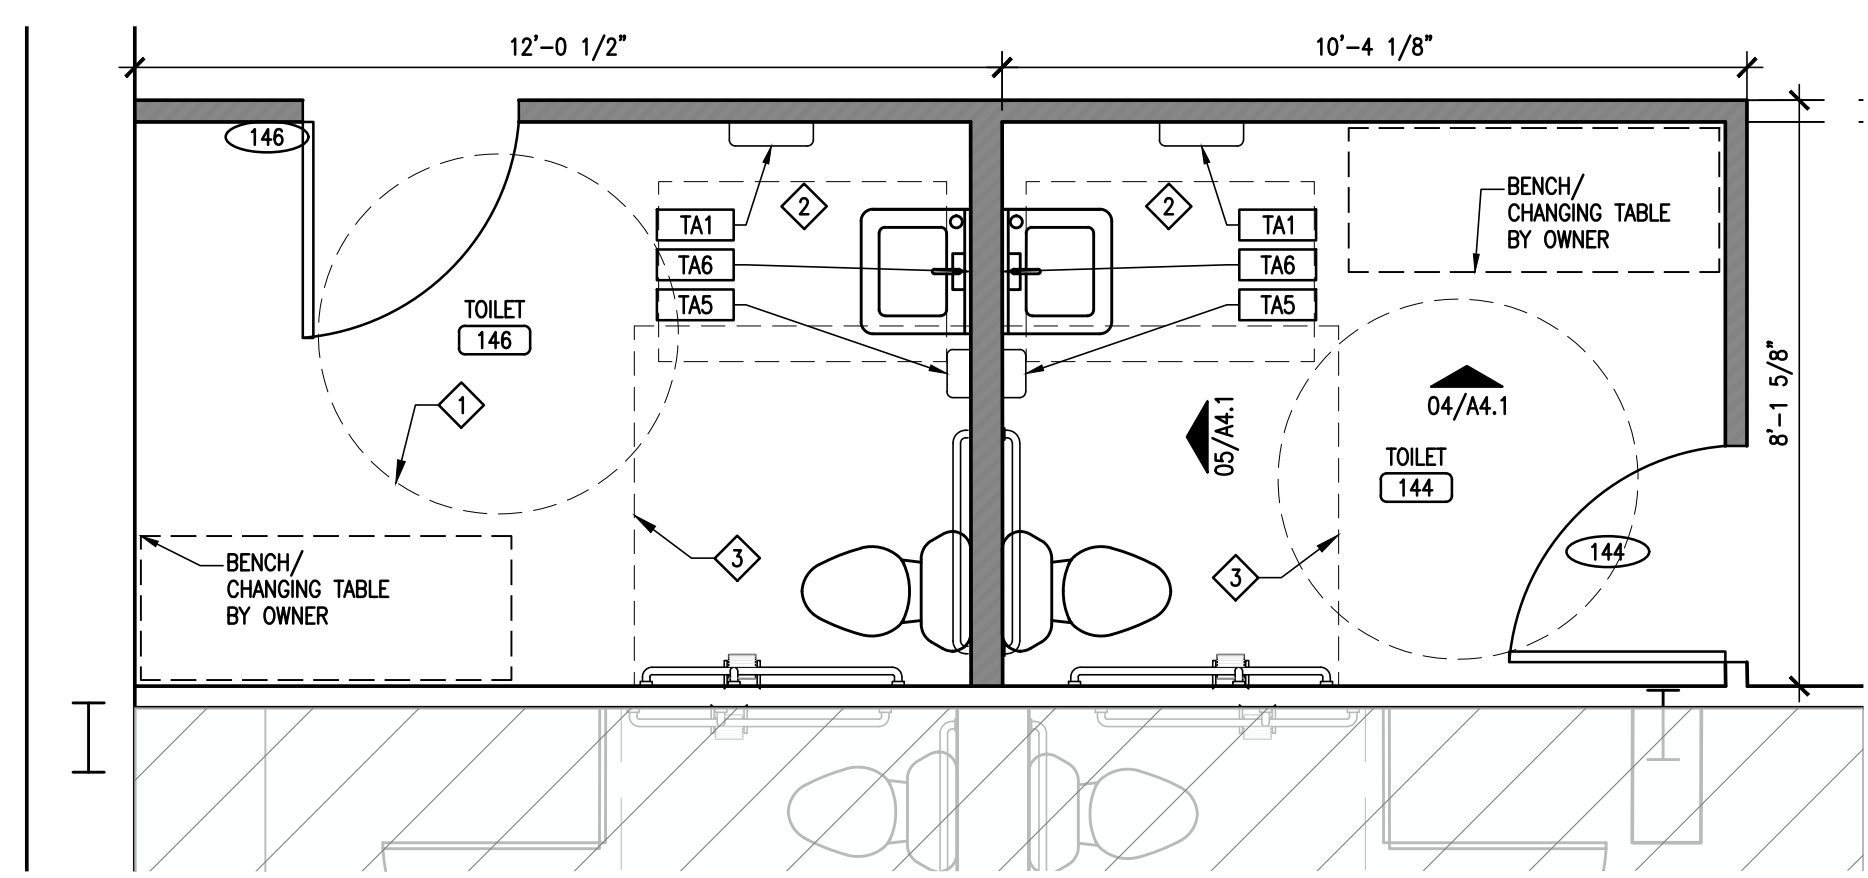


PHASE 4 FLOOR PLAN

SCALE: 3/8"=1'-0"

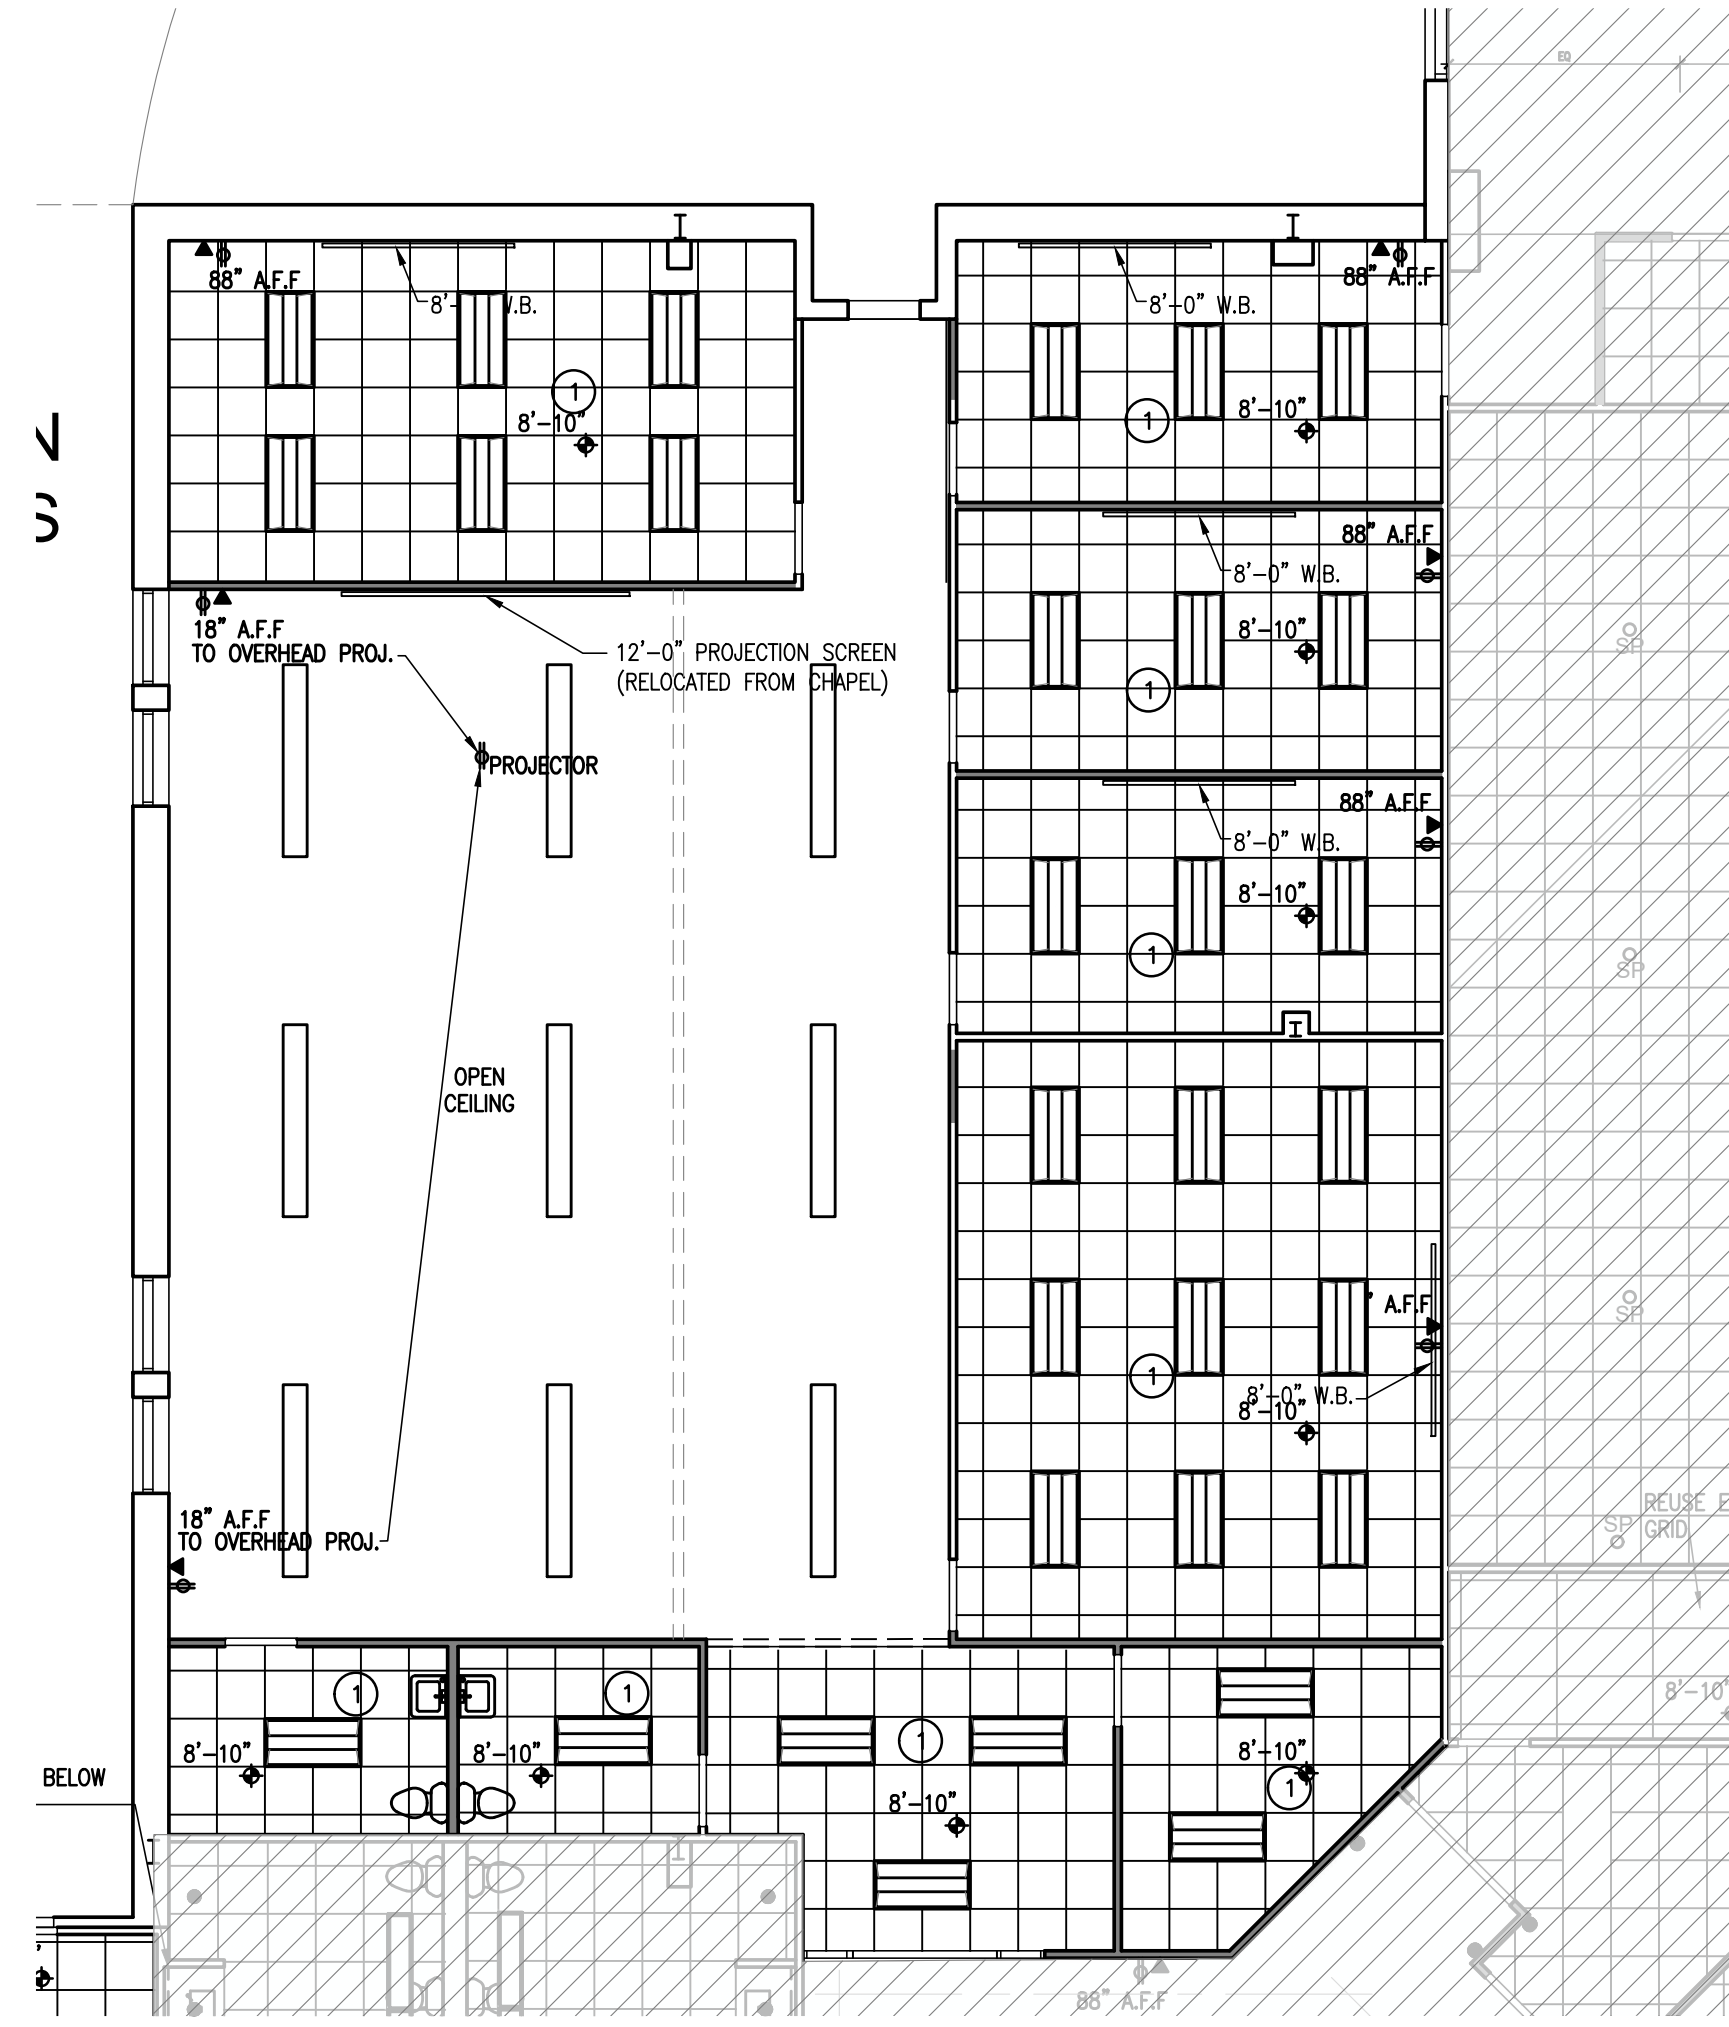

PHASE 4 REFLECTED CEILING PLAN

SCALE: 1/8"=1'-0"

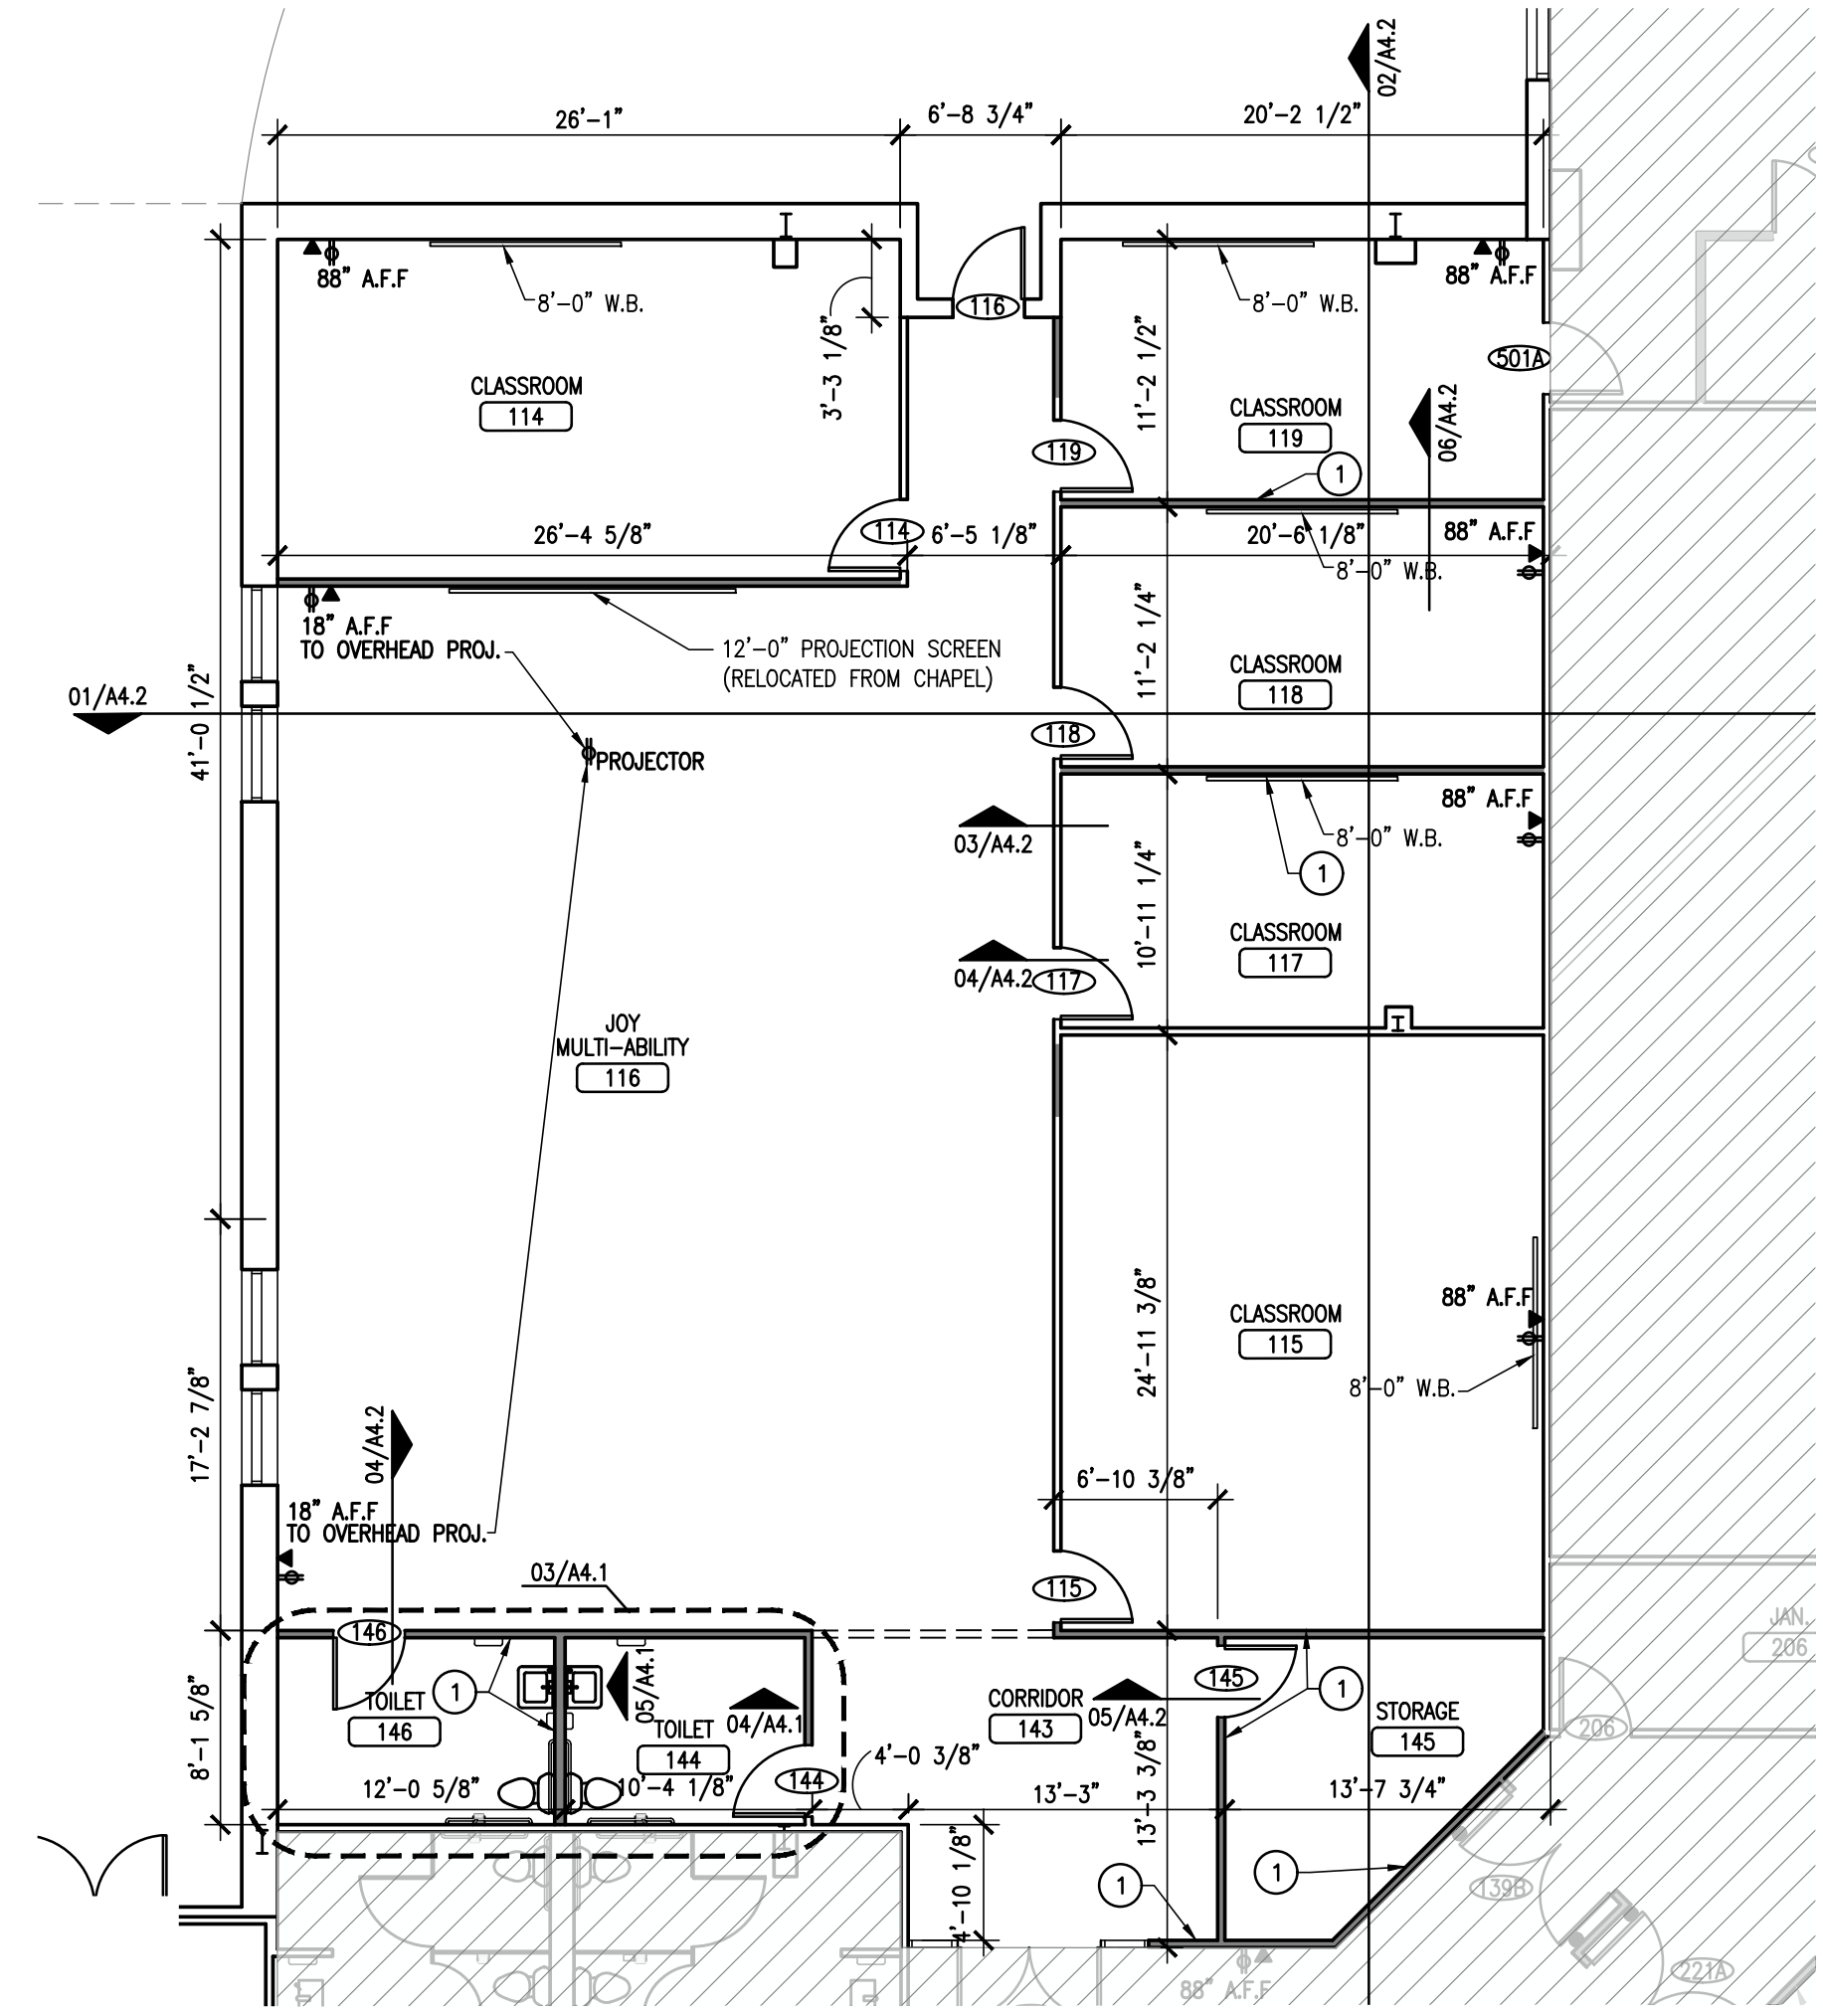

PHASE 4 FLOOR PLAN






SCALE: 1/8"=1'-0"



PHASING/
KEY PLAN

PROSTUD FULL COMPOSITE LIMITING HEIGHTS					
**					
**TAKEN FROM THE 2025 CLARK DIETRICH PRO STUD PRODUCT CATALOG FOR ADDITIONAL INFORMATION AND REQUIREMENTS ON NON-LOAD BEARING WALL CONSTRUCTION.					
5/8" TYPE X GYPSUM					
WIDTH	STUD MEMBER	DESIGN THICKNESS (IN)	YIELD STRENGTH (KSL)	SPACING (IN)	LATORAL LOAD - 5 PSF
3-5/8"	PROSTUD 25 362PDS125-15	0.0158	50	12	17'-1"
				16	15'-6"
				24	13'-6"
	PROSTUD 20 362PDS125-18	0.0190	70	12	18'-2"
				16	16'-10"
				24	15'-1"
	PROSTUD 30 362PDS125-30	0.0312	33	12	20'-5"
				16	18'-6"
				24	16'-2"
	PROSTUD 33 362PDS125-33	0.0346	33	12	21'-2"
				16	19'-2"
				24	16'-9"

PROSTUD NON-COMPOSITE LIMITING HEIGHTS					
**					
**TAKEN FROM THE 2025 CLARK DIETRICH PRO STUD PRODUCT CATALOG FOR ADDITIONAL INFORMATION AND REQUIREMENTS ON NON-LOAD BEARING WALL CONSTRUCTION.					
5/8" TYPE X GYPSUM					
WIDTH	STUD MEMBER	DESIGN THICKNESS (IN)	YIELD STRENGTH (KSL)	SPACING (IN)	LATORAL LOAD - 5 PSF
3-5/8"	PROSTUD 25 362PDS125-15	0.0158	50	12	12'-5"
				16	10'-9"
				24	8'-9"
	PROSTUD 20 362PDS125-18	0.0190	70	12	14'-6"
				16	13'-2"
				24	10'-9"
	PROSTUD 30 362PDS125-30	0.0312	33	12	17'-4"
				16	15'-9"
				24	13'-9"
	PROSTUD 33 362PDS125-33	0.0346	33	12	17'-11"
				16	16'-3"
				24	14'-3"

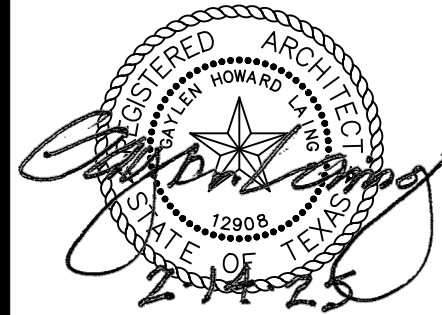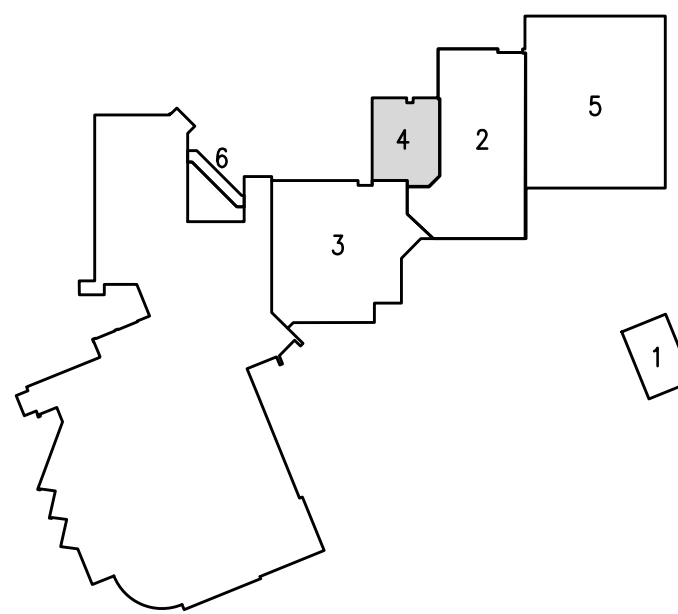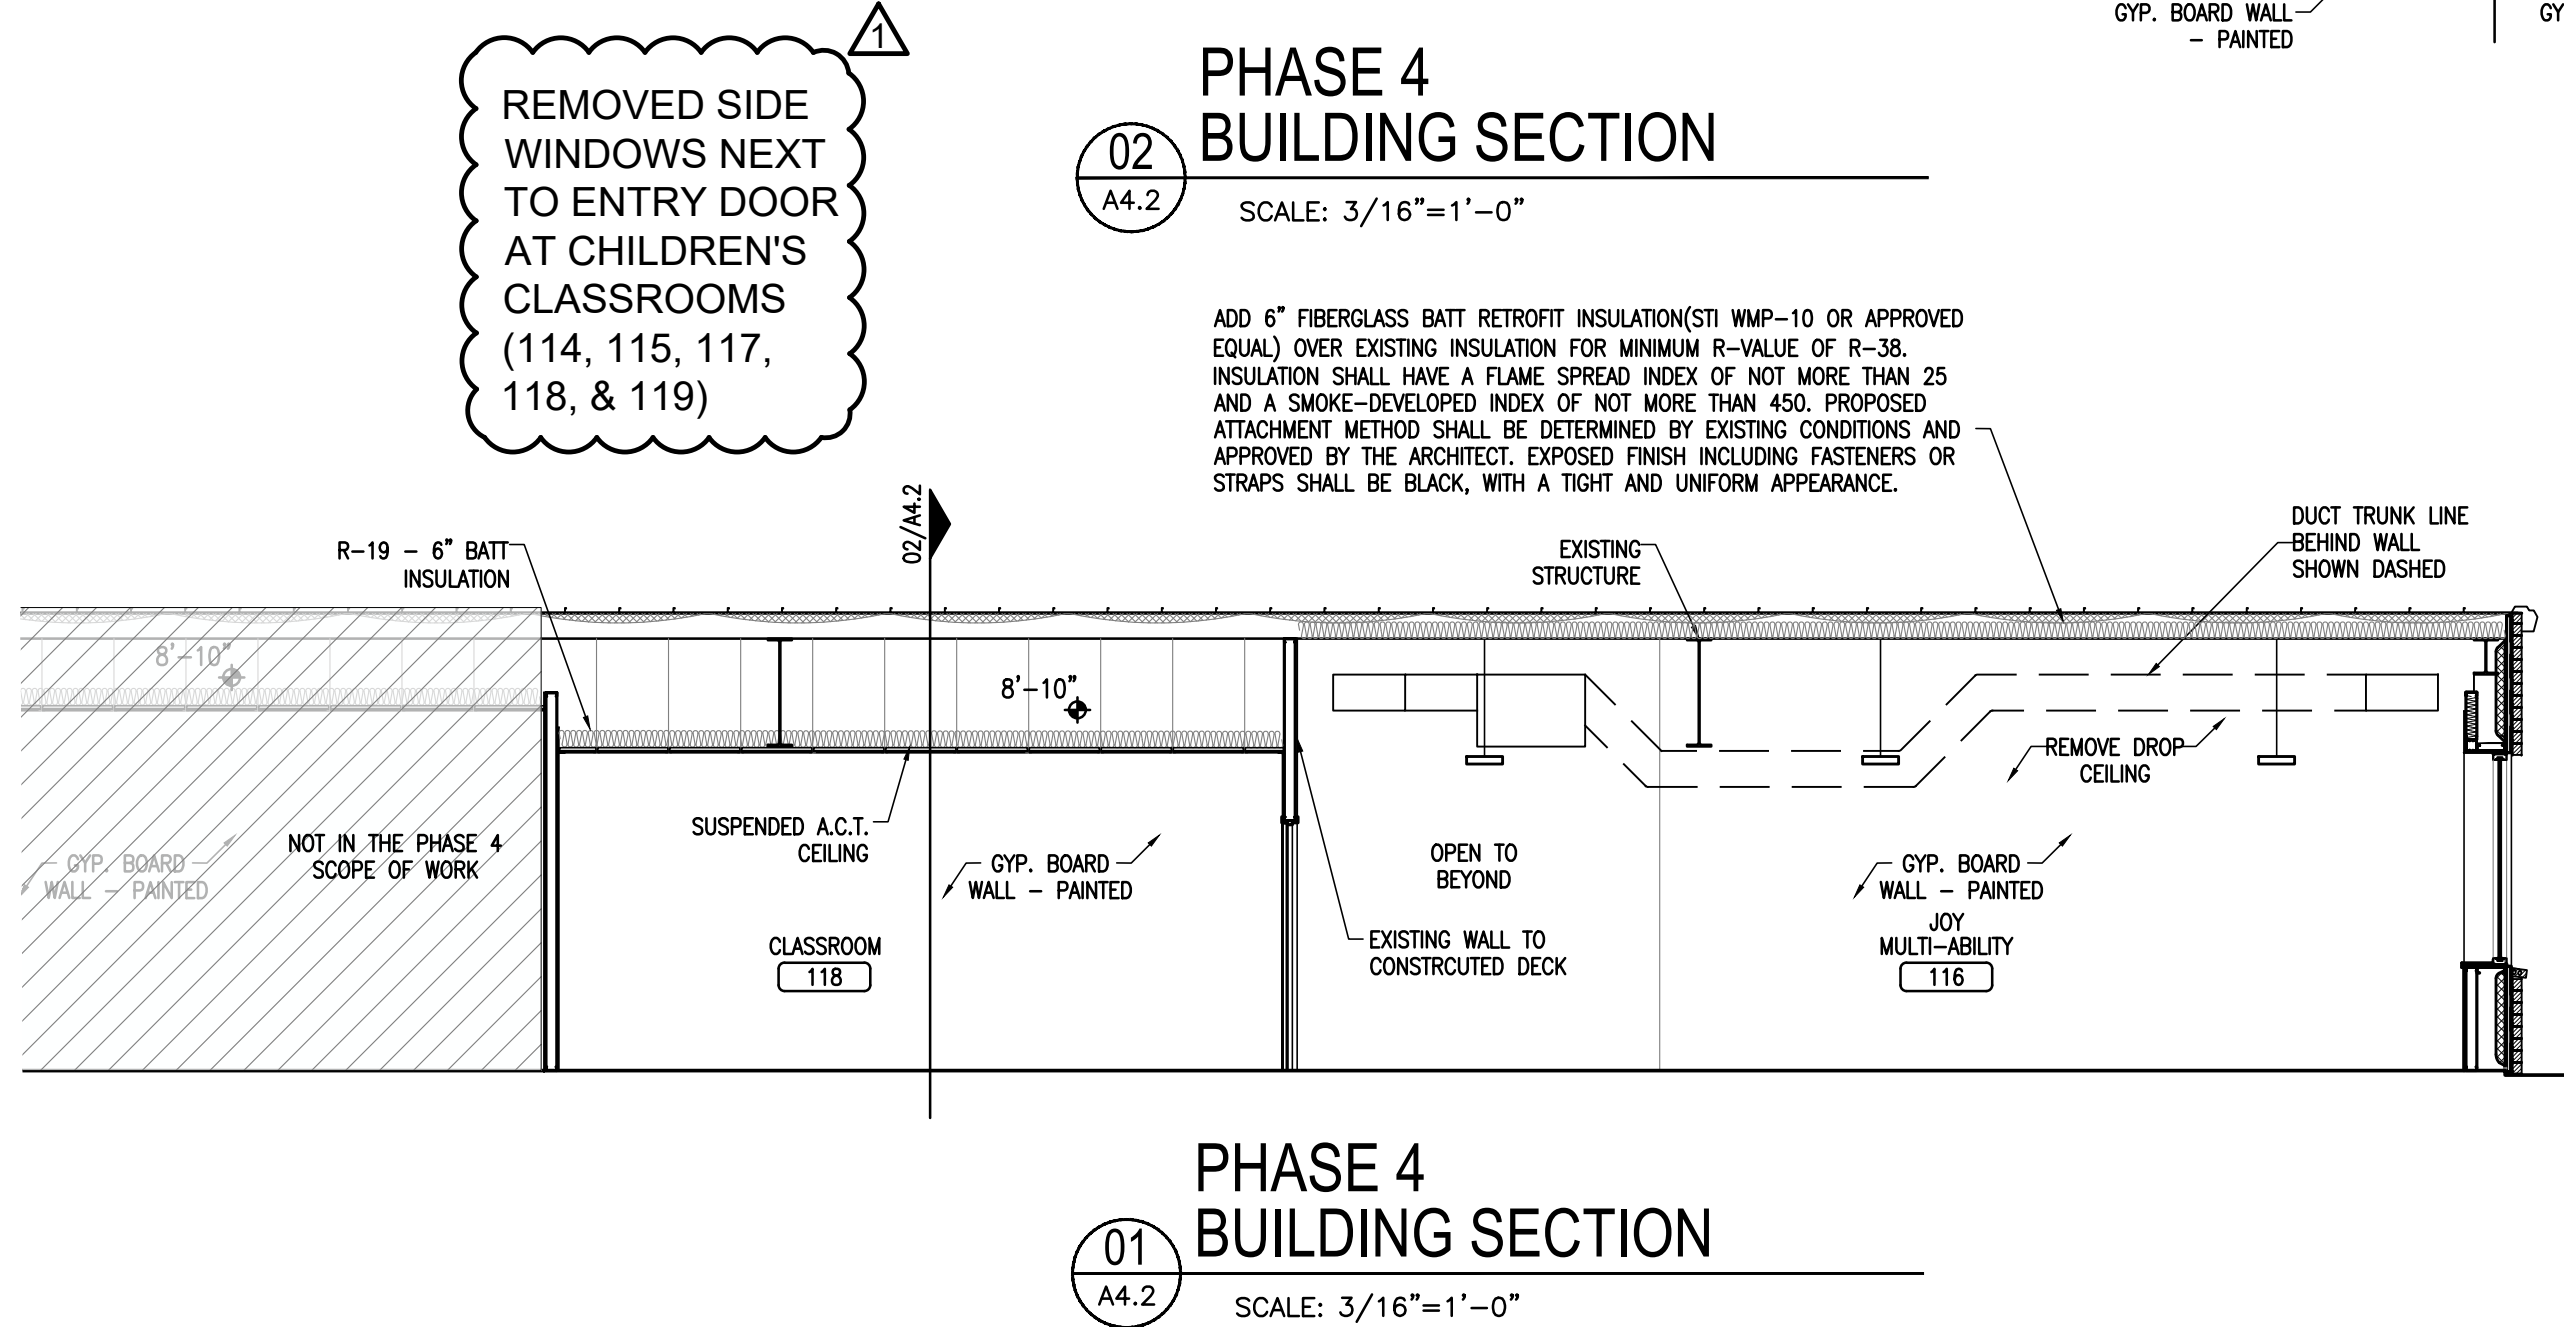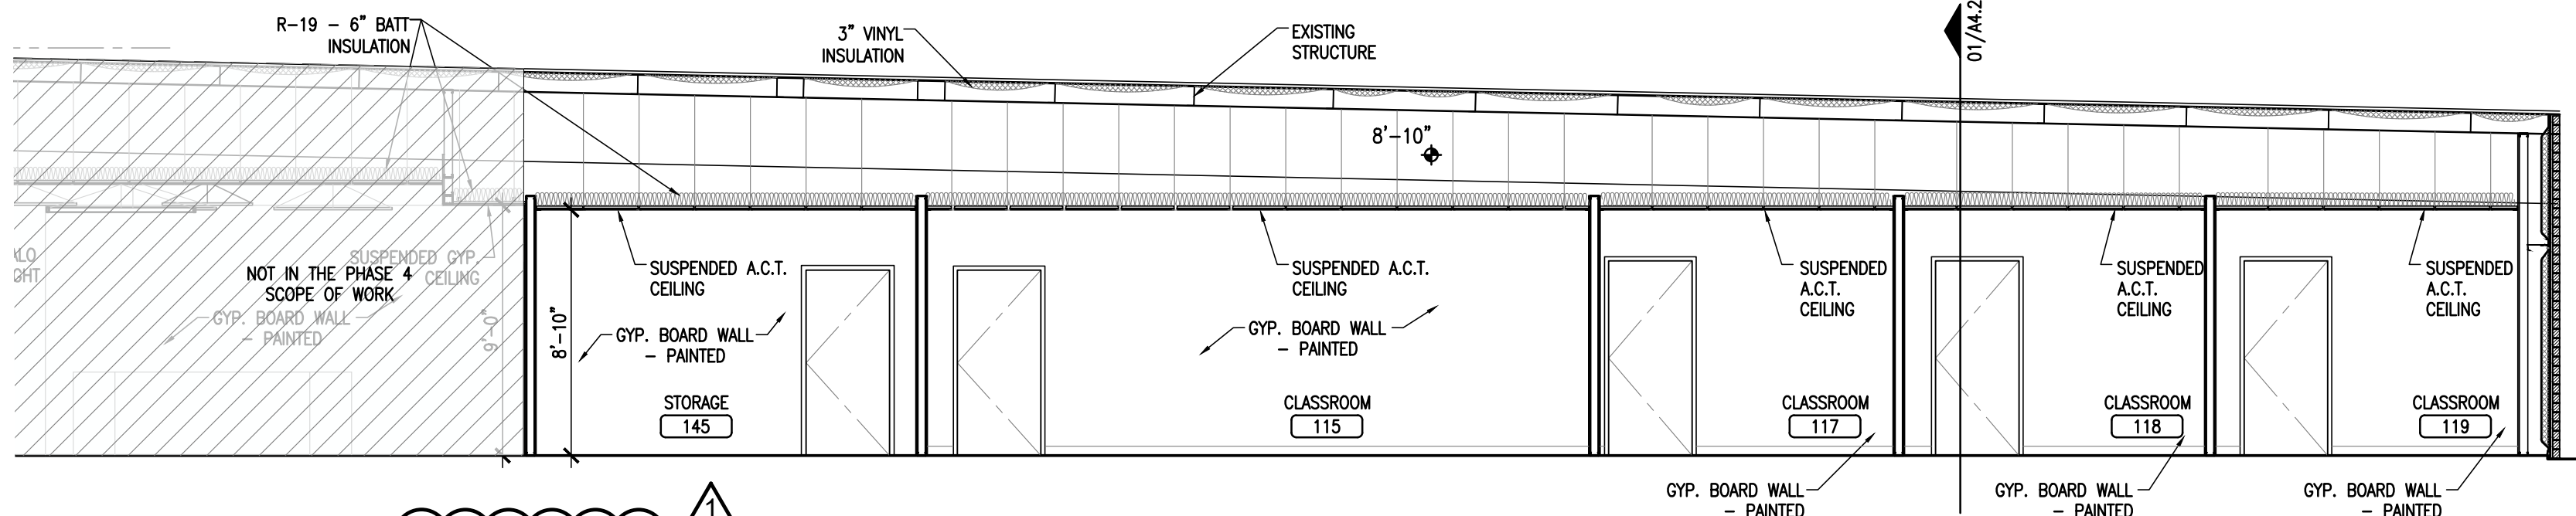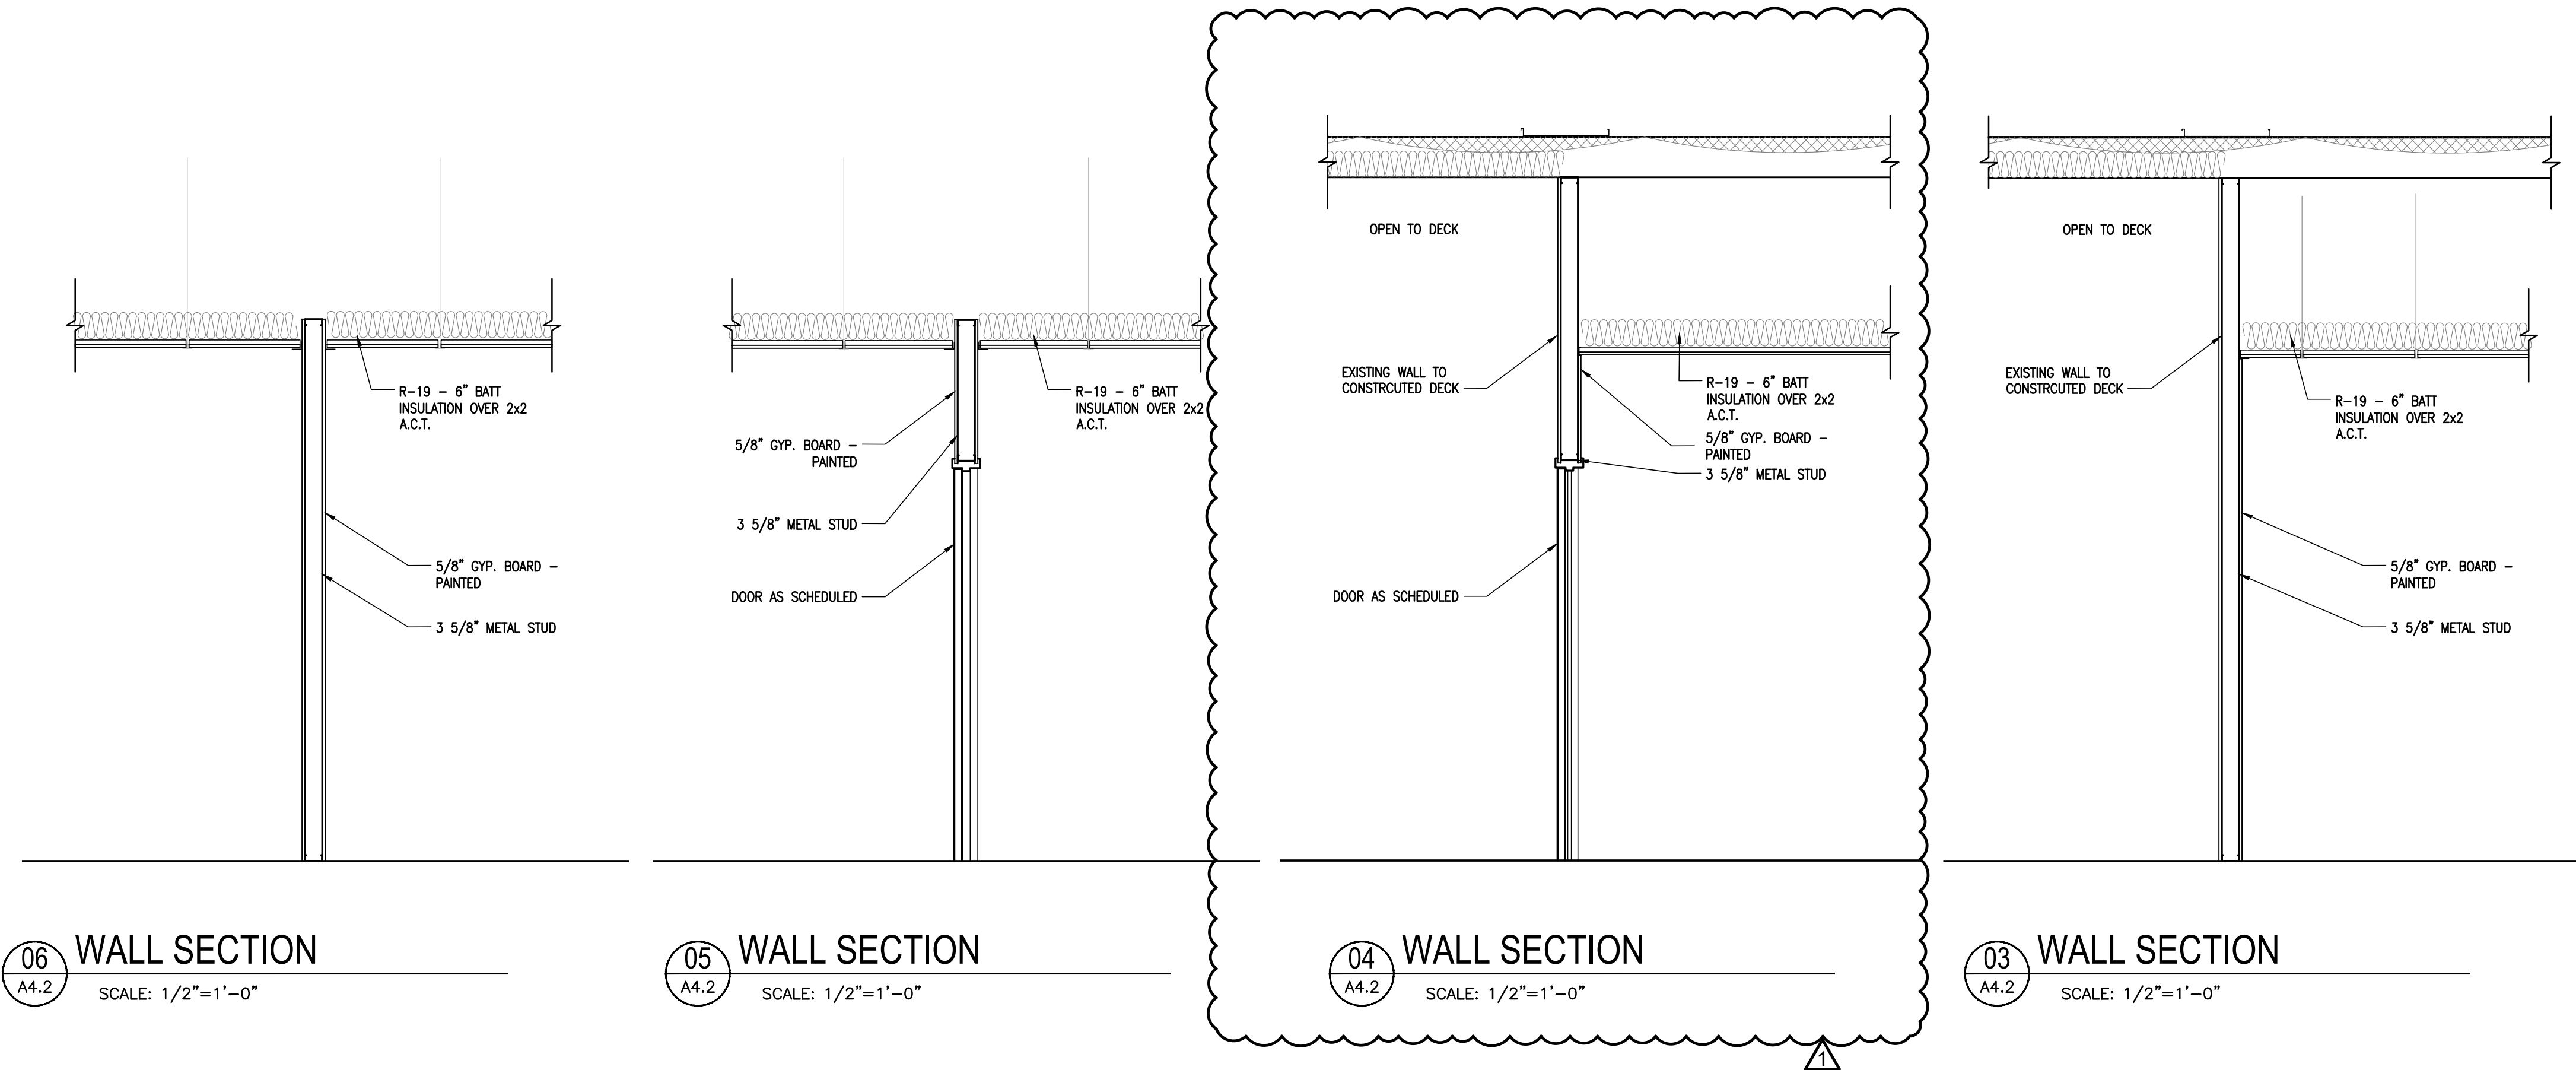

DATE: 08/14/24

ISSUE:

-

REVISION:

Δ REVISED 04-30-25


-

-

-

SHEET TITLE:


PHASE 4
BUILDING
SECTIONS

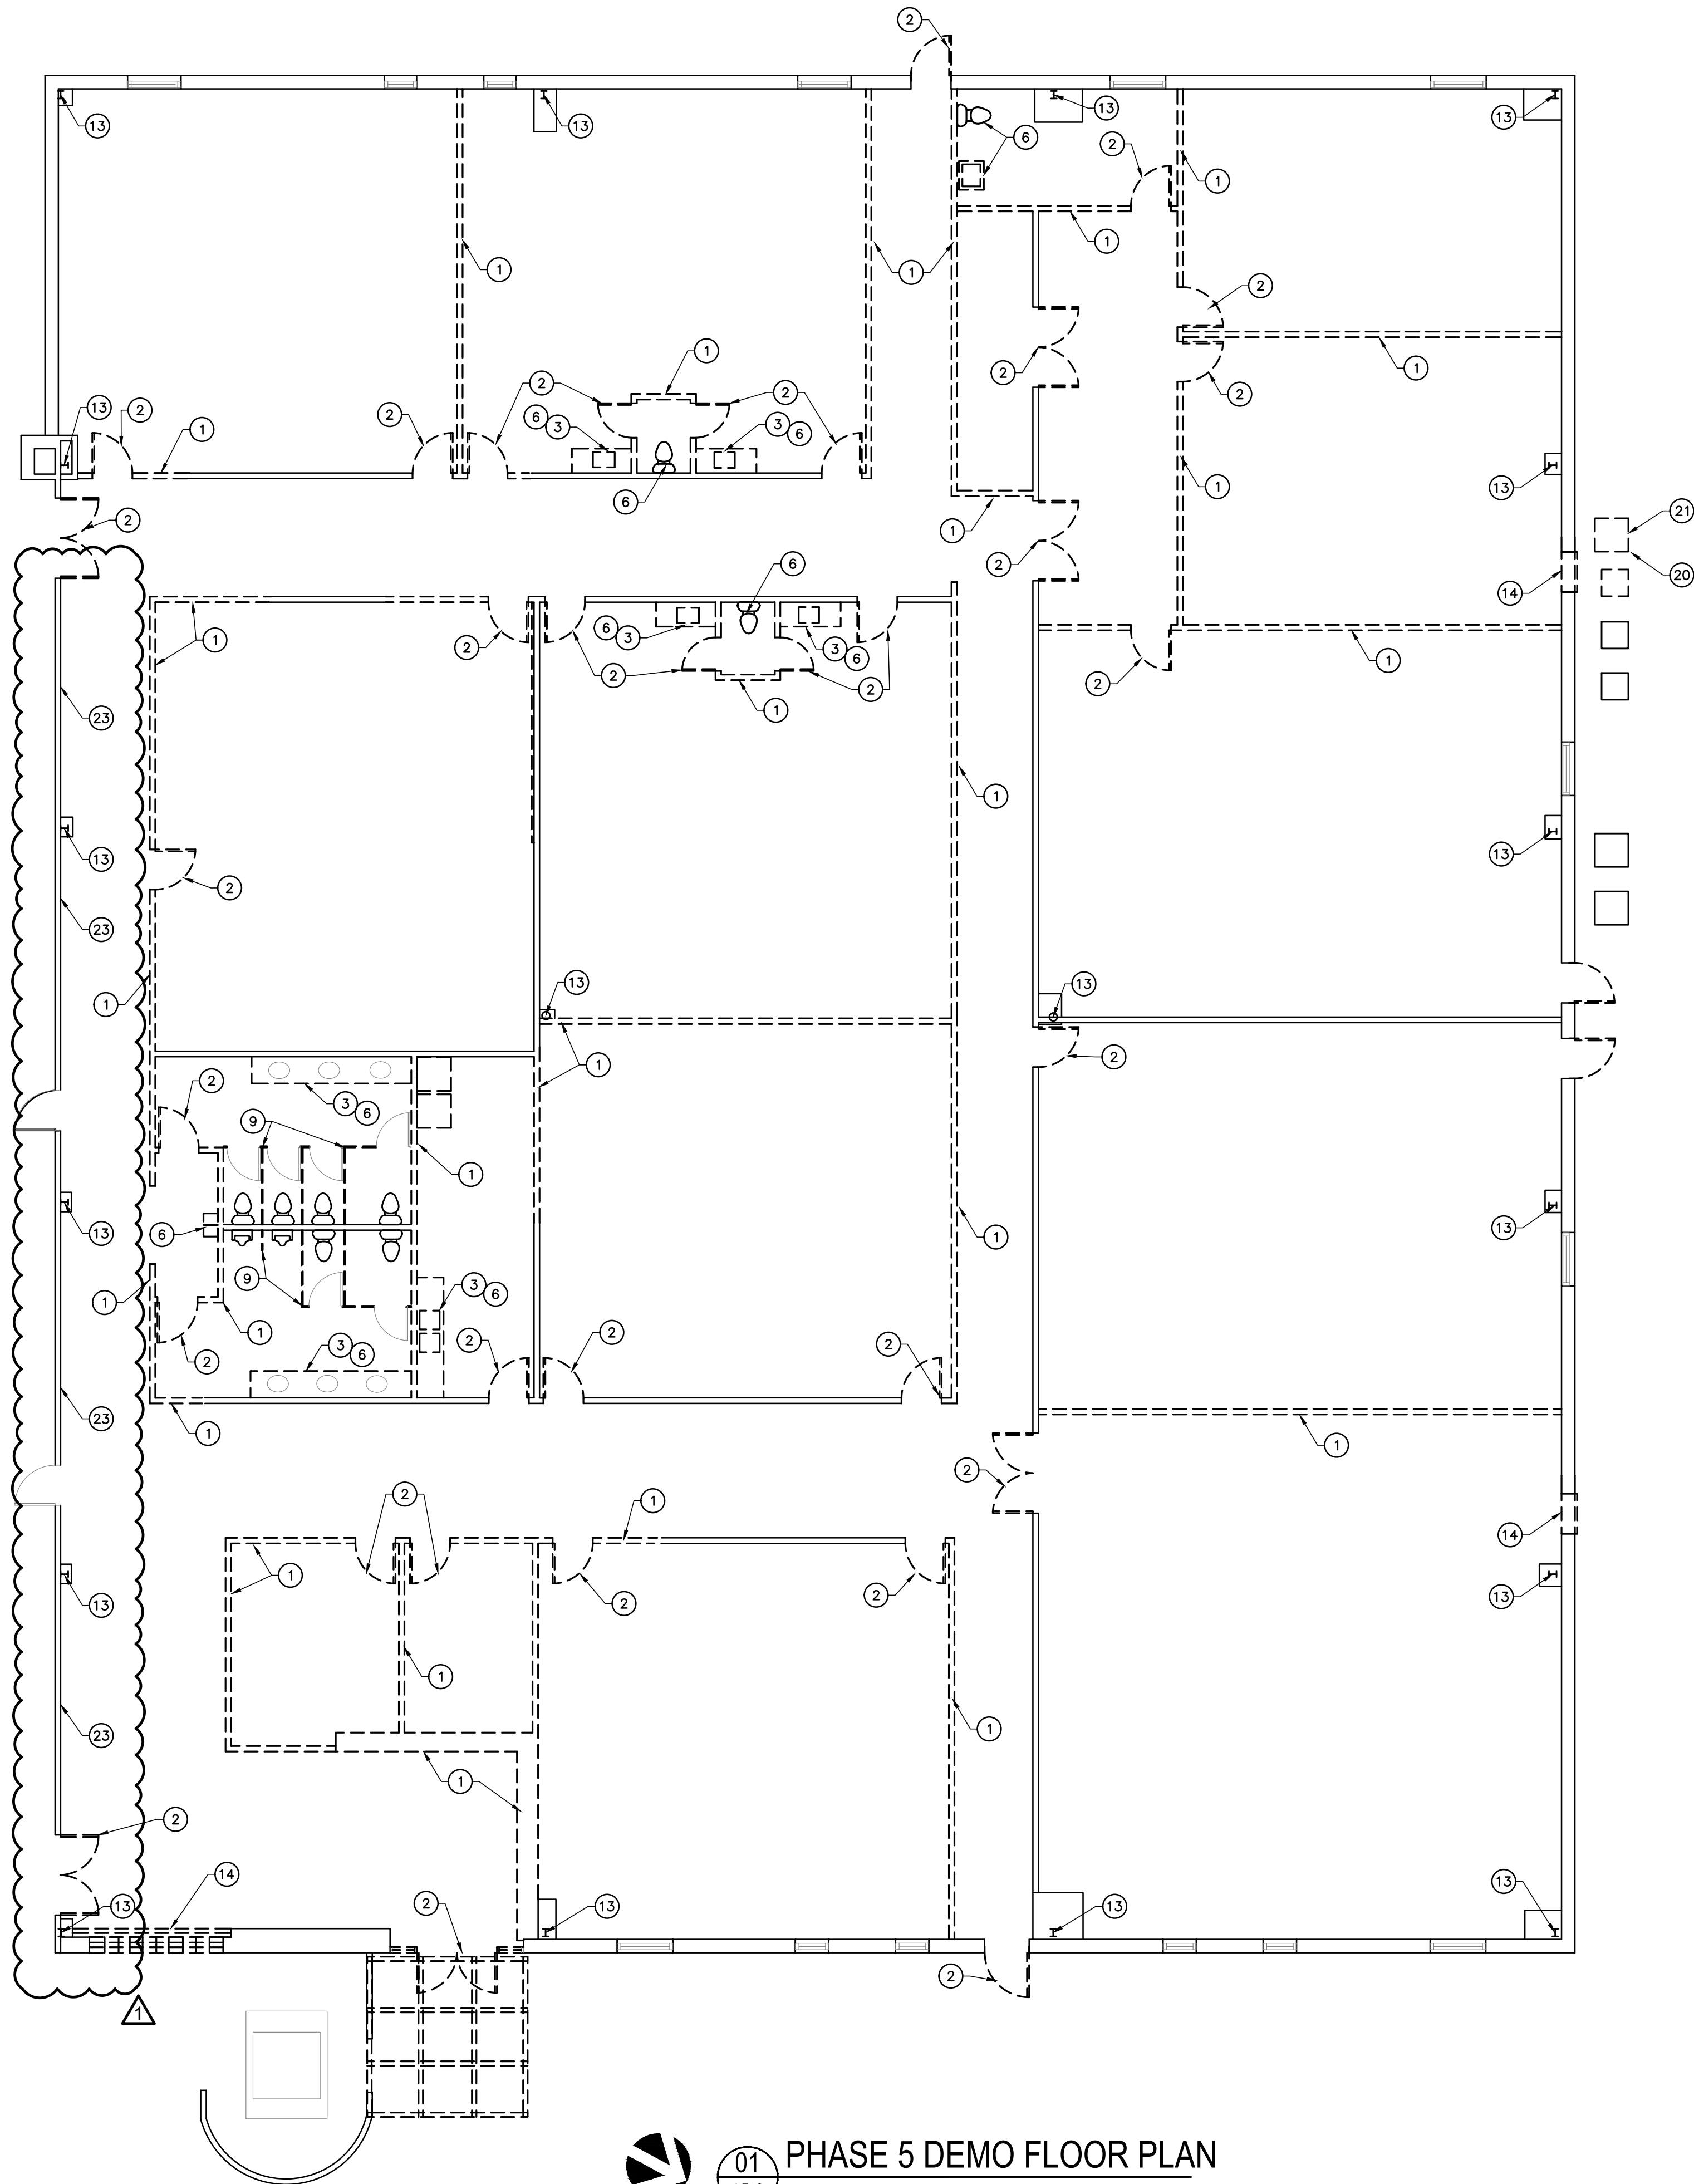

01
A5.0

PHASE 5 DEMO FLOOR PLAN

SCALE: 1/8"=1'-0"

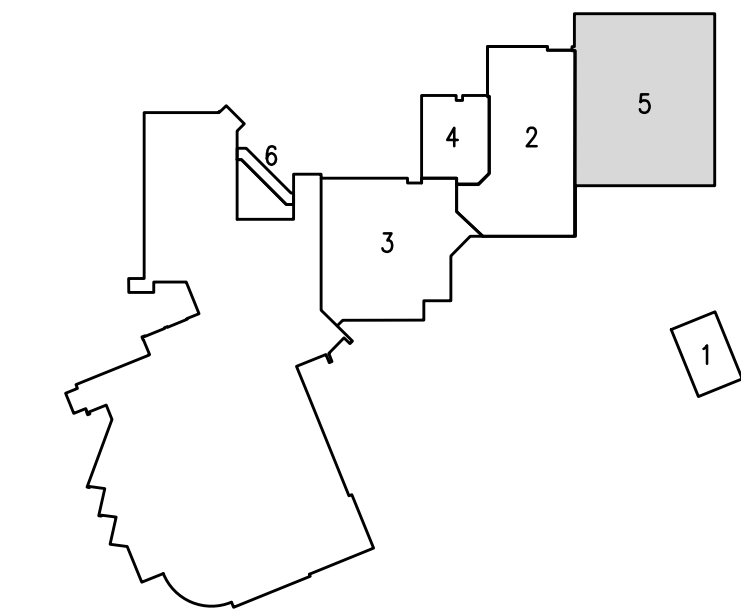

KEY PLAN

GENERAL DEMOLITION NOTES

1. REMOVE BUILDING ELEMENTS AS INDICATED AND TO THE EXTENT NECESSARY TO ACCOMPLISH THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. ELECTRICAL AND PLUMBING FIXTURES AND DEVICES REMOVED DURING DEMOLITION SHALL INCLUDE THE REMOVAL OF ALL ASSOCIATED WIRES, CONDUIT, AND LINES IN THEIR ENTIRETY BACK TO THE SOURCE OR TO UNDER A POINT OUT OF CONFLICT WITH THE NEW WORK AND OUT OF SIGHT.
2. ALL MATERIALS, FIXTURES, ETC. INDICATED TO BE REMOVED SHALL BE DISPOSED OF PROPERLY OFF SITE BY THE CONTRACTOR UNLESS NOTED OTHERWISE.
3. REMOVE BUILDING ELEMENTS IN SUCH A MANNER TO FACILITATE THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. PREPARE ALL SURFACES TO RECEIVE NEW FINISH AS SCHEDULED.
4. CONTRACTOR TO DETERMINE LOAD BEARING WALLS PRIOR TO DEMOLITION. RESHORE AS NECESSARY DURING ALL PHASES OF WORK.
5. COORDINATE WITH FACILITIES MANAGEMENT FOR REMOVAL, STORAGE, AND RELOCATION OF FACILITY FURNITURE, FIXTURES, AND EQUIPMENT DURING CONSTRUCTION.
6. PROTECT EXISTING CONSTRUCTION TO REMAIN FROM DEMOLITION PROCESS INCLUDING DUST AND DAMAGE CAUSED BY FOOT TRAFFIC.
7. PATCH AND REPAIR ALL EXISTING WALLS AND CEILINGS TO REMAIN WITH TEXTURE TO MATCH EXISTING. PREPARE SURFACES FOR NEW PAINT.
8. DOORS, FRAMES AND HARDWARE REMOVED DURING DEMOLITION SHALL BE SALVAGED FOR REUSE. COORDINATE WITH NEW DOOR SCHEDULE REQUIREMENTS, REFURBISH EXISTING DOORS AND FRAMES REUSED.
9. LIGHT FIXTURES AND CEILING MOUNTED DEVICES AND EQUIPMENT SHALL BE REMOVED OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY. REF. REFLECTED CEILING PLAN AND MEP FOR FULL SCOPE OF NEW CONSTRUCTION.
10. MECHANICAL AIR DIFFUSER/RETURN TO BE RELOCATED OR REMOVED TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY.
11. FIRE SPRINKLERS AND ALARMS SHALL BE MODIFIED AND/OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUTS. CONTRACTOR TO FIELD VERIFY.
12. REMOVE ALL FLOORING THROUGHOUT, U.O.N. FLOORING INCLUDES CARPET, WOOD FLOORING, VCT AND SHEET VINYL. WALL BASE INCLUDES WOOD BASE, VINYL BASE AND CARPET BASE.
13. PER STATE LAW, AN ASBESTOS SURVEY MUST BE PERFORMED AND ANY MATERIAL FOUND TO BE AFFECTED BY CONSTRUCTION THAT ASBESTOS MUST BE PROPERLY ABATED.
14. ITEMS TO BE REMOVED OR DEMOLISHED SHOWN DASHED AND BOLD.

DEMOLITION NOTES BY NUMBERS ○

1. REMOVE EXISTING WALL (DASHED).
2. REMOVE AND COORDINATE THE REUSE OF DOOR FRAME AND HARDWARE IN NEW LOCATION.
3. REMOVE EXISTING CABINETRY.
4. REMOVE EXISTING WINDOW.
5. REMOVE EXISTING LIGHT FIXTURE(S).
6. REMOVE EXISTING PLUMBING FIXTURE.
7. REMOVE EXISTING LAY-IN CEILING.
8. EXISTING CEILING AND LIGHTING TO REMAIN.
9. REMOVE EXISTING TOILET PARTITIONS.
10. REMOVE EXISTING CARPET AND/OR VINYL FLOORING.
11. REMOVE AND RELOCATE EXISTING PAPER TOWEL DISPENSER.
12. REMOVE AND COORDINATE THE REUSE OF 2x2 A.C.T. CEILING.
13. STRUCTURAL COLUMN, PROTECT DURING CONSTRUCTION.
14. REMOVE WALL TO CREATE OPENING FOR NEW EXTERIOR DOOR AND FRAME.
15. REMOVE BAPTISTERY.
16. REMOVE ROLLING COUNTER SHUTTER.
17. REMOVE PORTION OF CONCRETE SLAB FOR NEW PLUMBING.
18. DISMANTLE AND REMOVE PORTABLE DESK.
19. REMOVE EXISTING STEEL DOOR(S) AND FRAME.
20. EXISTING CONCRETE BASE TO BE REMOVED AND REPLACED.
21. CONDENSING UNIT TO BE REMOVED AND RELOCATED.
22. REMOVE AND COORDINATE THE REUSE OF BABY TOILET BOWLS.
23. PROTECT AND PRESERVE WALL MURAL DURING DEMOLITION AND CONSTRUCTION.

DEMOLITION LEGEND

	EXISTING TO REMAIN
	TO BE DEMOLISHED/ REMOVED
	NO DEMOLITION SCOPE WITHIN THIS AREA IN THIS PHASE


NORTHWOOD CHURCH
RENOVATIONS

1870 RUFE SNOW DR.
KELLER, TEXAS 76248

ARCHITECTURE
PLANNING
INTERIOR DESIGN

GHILA

1300 WEST RANDOL MILL ROAD, ARLINGTON, TEXAS 76012
817.801.7200
www.ghila-inc.com

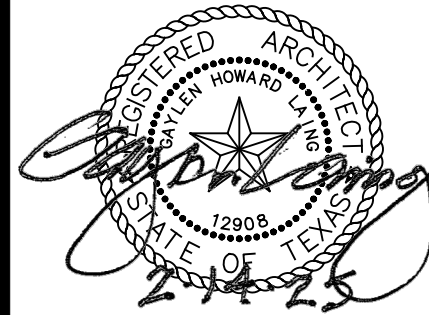

DATE: 08/14/24

ISSUE:


REVISION:

△ REVISED 04-30-25

SHEET TITLE:

PHASE 5 DEMO
FLOOR PLAN

A5.0

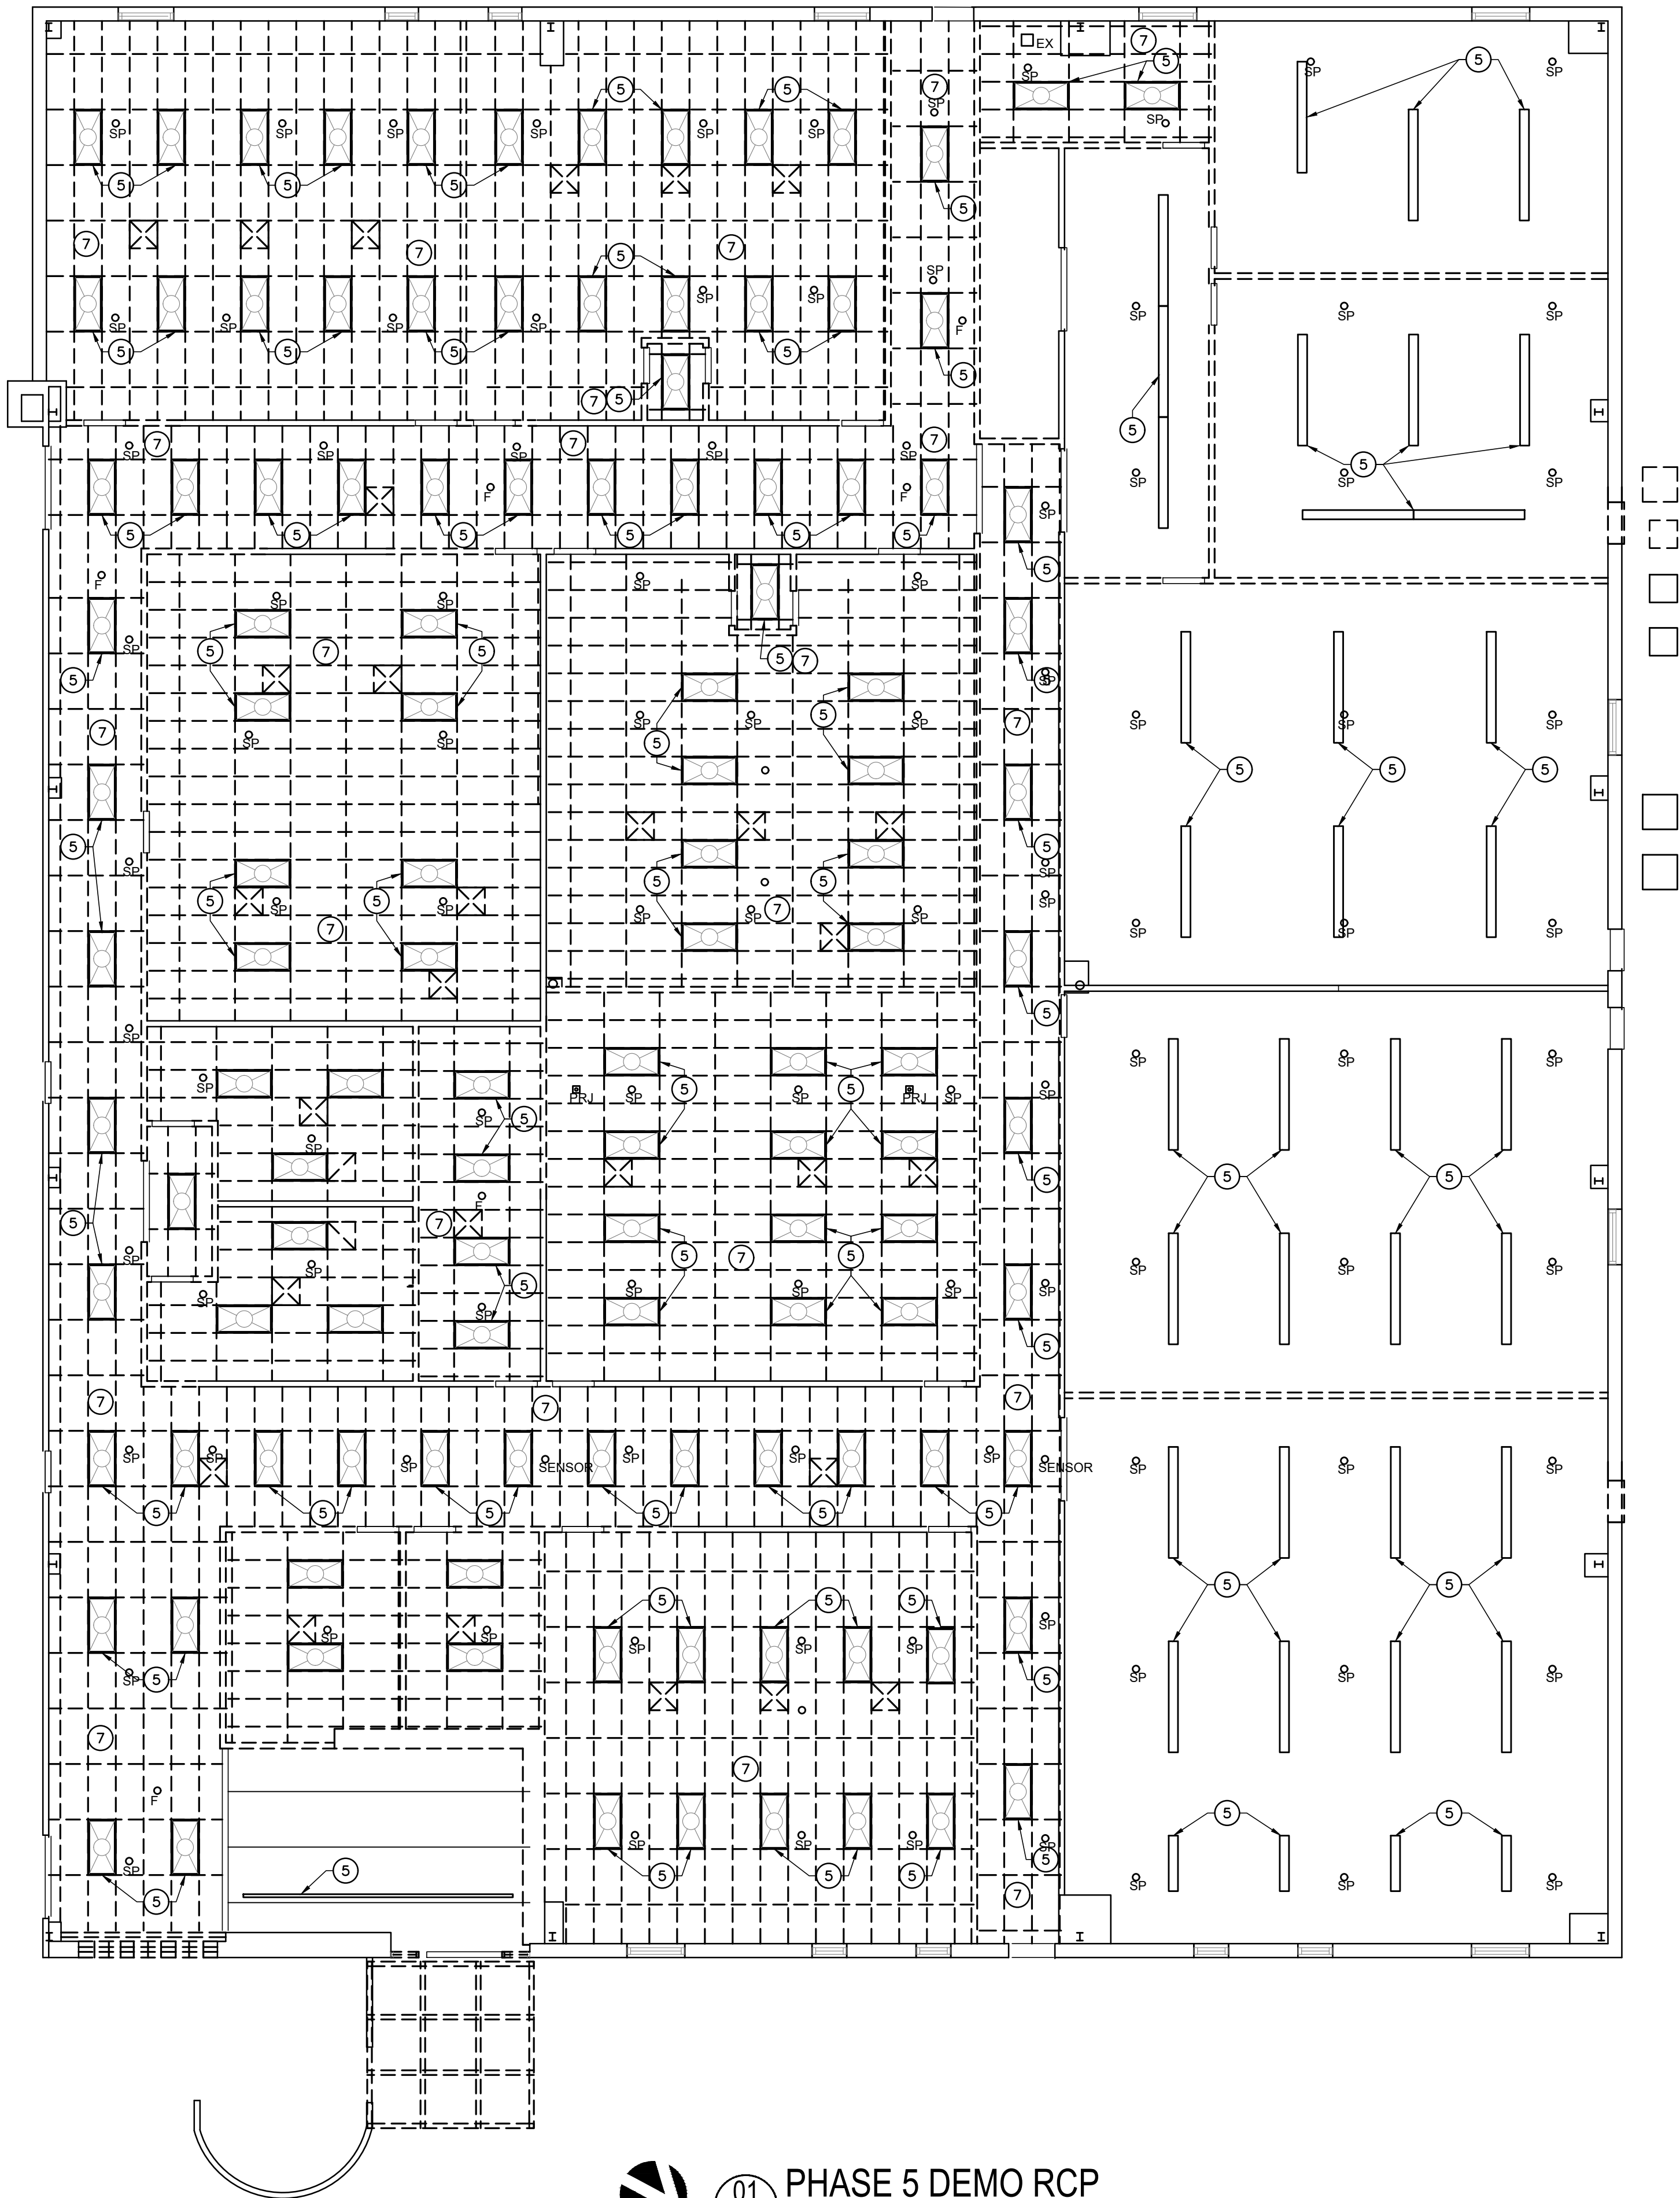


01
A5.1

PHASE 5 DEMO RCP

SCALE: 1/8"=1'-0"



KEY PLAN

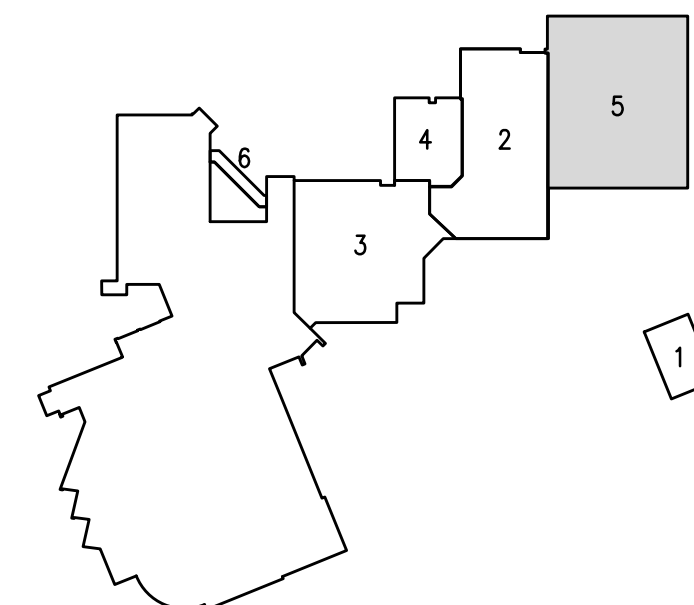

GENERAL DEMOLITION NOTES

1. REMOVE BUILDING ELEMENTS AS INDICATED AND TO THE EXTENT NECESSARY TO ACCOMPLISH THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. ELECTRICAL AND PLUMBING FIXTURES AND DEVICES REMOVED DURING DEMOLITION SHALL INCLUDE THE REMOVAL OF ALL ASSOCIATED WIRES, CONDUIT, AND LINES IN THEIR ENTIRETY BACK TO THE SOURCE OR TO UNDER A POINT OUT OF CONFLICT WITH THE NEW WORK AND OUT OF SIGHT.
2. ALL MATERIALS, FIXTURES, ETC. INDICATED TO BE REMOVED SHALL BE DISPOSED OF PROPERLY OFF SITE BY THE CONTRACTOR UNLESS NOTED OTHERWISE.
3. REMOVE BUILDING ELEMENTS IN SUCH A MANNER TO FACILITATE THE NEW WORK SHOWN IN THE CONSTRUCTION DOCUMENTS. PREPARE ALL SURFACES TO RECEIVE NEW FINISH AS SCHEDULED.
4. CONTRACTOR TO DETERMINE LOAD BEARING WALLS PRIOR TO DEMOLITION. RESHORE AS NECESSARY DURING ALL PHASES OF WORK.
5. COORDINATE WITH FACILITIES MANAGEMENT FOR REMOVAL, STORAGE, AND RELOCATION OF FACILITY FURNITURE, FIXTURES, AND EQUIPMENT DURING CONSTRUCTION.
6. PROTECT EXISTING CONSTRUCTION TO REMAIN FROM DEMOLITION PROCESS INCLUDING DUST AND DAMAGE CAUSED BY FOOT TRAFFIC.
7. PATCH AND REPAIR ALL EXISTING WALLS AND CEILINGS TO REMAIN WITH TEXTURE TO MATCH EXISTING. PREPARE SURFACES FOR NEW PAINT.
8. DOORS, FRAMES AND HARDWARE REMOVED DURING DEMOLITION SHALL BE SALVAGED FOR REUSE. COORDINATE WITH NEW DOOR SCHEDULE REQUIREMENTS, REFURBISH EXISTING DOORS AND FRAMES REUSED.
9. LIGHT FIXTURES AND CEILING MOUNTED DEVICES AND EQUIPMENT SHALL BE REMOVED OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY. REF. REFLECTED CEILING PLAN AND MEP FOR FULL SCOPE OF NEW CONSTRUCTION.
10. MECHANICAL AIR DIFFUSER/RETURN TO BE RELOCATED OR REMOVED TO COORDINATE WITH NEW CONSTRUCTION LAYOUT. CONTRACTOR TO FIELD VERIFY.
11. FIRE SPRINKLERS AND ALARMS SHALL BE MODIFIED AND/OR RELOCATED AS NECESSARY TO COORDINATE WITH NEW CONSTRUCTION LAYOUTS. CONTRACTOR TO FIELD VERIFY.
12. REMOVE ALL FLOORING THROUGHOUT. U.O.M. FLOORING INCLUDES CARPET, WOOD FLOORING, VCT AND SHEET VINYL. WALL BASE INCLUDES WOOD BASE, VINYL BASE AND CARPET BASE.
13. PER STATE LAW, AN ASBESTOS SURVEY MUST BE PERFORMED AND ANY MATERIAL FOUND TO BE AFFECTED BY CONSTRUCTION THAT ASBESTOS MUST BE PROPERLY ABATED.
14. ITEMS TO BE REMOVED OR DEMOLISHED SHOWN DASHED AND BOLD.

DEMOLITION NOTES BY NUMBERS ○

1. REMOVE EXISTING WALL (DASHED).
2. REMOVE AND COORDINATE THE REUSE OF DOOR FRAME AND HARDWARE IN NEW LOCATION.
3. REMOVE EXISTING CABINETRY.
4. REMOVE EXISTING WINDOW.
5. REMOVE EXISTING LIGHT FIXTURE(S).
6. REMOVE EXISTING PLUMBING FIXTURE.
7. REMOVE EXISTING LAY-IN CEILING.
8. EXISTING CEILING AND LIGHTING TO REMAIN.
9. REMOVE EXISTING TOILET PARTITIONS.
10. REMOVE EXISTING CARPET AND/OR VINYL FLOORING.
11. REMOVE AND RELOCATE EXISTING PAPER TOWEL DISPENSER.
12. REMOVE AND COORDINATE THE REUSE OF 2x2 A.C.T. CEILING.
13. STRUCTURAL COLUMN, PROTECT DURING CONSTRUCTION.
14. REMOVE WALL TO CREATE OPENING FOR NEW EXTERIOR DOOR AND FRAME.
15. REMOVE BAPTISTERY.
16. REMOVE ROLLING COUNTER SHUTTER.
17. REMOVE PORTION OF CONCRETE SLAB FOR NEW PLUMBING.
18. DISMANTLE AND REMOVE PORTABLE DESK.
19. REMOVE EXISTING STEEL DOOR(S) AND FRAME.
20. EXISTING CONCRETE BASE TO BE REMOVED AND REPLACED.
21. CONDENSING UNIT TO BE REMOVED AND RELOCATED.
22. REMOVE AND COORDINATE THE REUSE OF BABY TOILET BOWLS.
23. PROTECT AND PRESERVE WALL MURAL DURING DEMOLITION AND CONSTRUCTION.

DEMOLITION LEGEND

	EXISTING TO REMAIN
	TO BE DEMOLISHED/ REMOVED
	NO DEMOLITION SCOPE WITHIN THIS AREA IN THIS PHASE

NORTHWOOD CHURCH

RENOVATIONS

1870 RUFE SNOW DR.
KELLER, TEXAS 76248



DATE: 08/14/24

ISSUE:

REVISION:

△ REVISED 04-30-25

SHEET TITLE:

PHASE 5
DEMO REFLECTED
CEILING PLAN

A5.1

ARCHITECTURE
PLANNING
INTERIOR DESIGN

GHILA

1300 WEST RANDOL MILL ROAD, ARLINGTON, TEXAS 76012
817.801.7200
www.ghila-inc.com

FLOOR PLAN NOTES BY NUMBER

1. NEW METAL FRAMED WALL. SEE WALL SECTIONS FOR ADDITIONAL INFORMATION.
2. NEW ALUMINUM FRAME AND GLASS PARTITION WALLS
3. NEW EXTERIOR INFILL WALL TO MATCH EXISTING..
4. RELOCATE EXISTING STOREFRONT DOOR & WINDOW UNITS.
5. EXTEND NEW & EXISTING WALLS FULL HEIGHT TO DECK.
6. REMOVE DOOR AND FRAME AND RE-INSTALL IN NEW WALL CONFIGURATION.
7. BABY TOILET BOWLS TO BE REUSED/ADDED TO TOILET ROOMS 309, 310, 311, & 312.

CLEAR FLOOR SPACE

- 1 60" TURNING DIAMETER
- 2 30" x 48" CLEAR FLOOR SPACE
- 3 60" x 56" CLEAR FLOOR SPACE
- 4 48" x 60" CLEAR FLOOR SPACE
- 5 36" x 48" CLEAR FLOOR SPACE
- 6 36" x 60" CLEAR FLOOR SPACE
- 7 42" x 58" CLEAR FLOOR SPACE
- 8 54" x 60" CLEAR FLOOR SPACE
- 9 48" x 48" CLEAR FLOOR SPACE
- 10 58" x 42" CLEAR FLOOR SPACE

REMOVED SIDELIGHT
WINDOWS NEXT TO
ENTRY DOOR AT
CHILDREN'S
CLASSROOMS &
CHILDREN'S WORSHIP
ROOMS

P5 ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLOOR	BASE	WALLS	CEILING	NOTES
204	PRESCHOOL WORSHIP	CPT	VB	P	ACT	
220	GOLF CART	-	-	-	-	
301	2-3 YEARS	CPT	VB	P	ACT	
302	3 YEARS	CPT	VB	P	ACT	
303	5 YEARS	CPT	VB	P	ACT	
304	4 YEARS	CPT	VB	P	ACT	
305	5 YEARS	CPT	VB	P	ACT	
306	4 YEARS	CPT	VB	P	ACT	
307	OFFICE	CPT	VB	P	ACT	
308	OFFICE	CPT	VB	P	ACT	
309	TOILET	LVP	VB	EPX	ACT	
310	TOILET	LVP	VB	EPX	ACT	
311	TOILET	LVP	VB	EPX	ACT	
312	TOILET	LVP	VB	EPX	ACT	
313	UTILITY	LVP	VB	P	ACT	
314	BOYS	PT	PT	PT/P	ACT	
315	GIRLS	PT	PT	PT/P	ACT	
316	CORRIDOR	LVP	VB	P	ACT	
317	VESTIBULE	LVP	VB	P	ACT	
400	CHILDREN'S WORSHIP	CPT	VB	P	ACT	
401	1ST & 2ND GRADE WORSHIP	CPT	VB	P	ACT	
402	2ND GRADE	CPT	VB	P	ACT	
403	1ST GRADE	CPT	VB	P	ACT	
404	2ND GRADE	CPT	VB	P	ACT	
405	1ST GRADE	CPT	VB	P	ACT	
406	3RD GRADE	CPT	VB	P	ACT	
407	4TH GRADE	CPT	VB	P	ACT	
408	3RD GRADE	CPT	VB	P	ACT	
409	4TH GRADE	CPT	VB	P	ACT	
410	STORAGE	LVP	VB	P	ACT	
411	CORRIDOR-SEE NOTE BELOW	LVP	VB	P	ACT	
412	CORRIDOR	LVP	VB	P	ACT	
413	VESTIBULE	LVP	VB	P	ACT	

FLOORING: WALLS:

- CPT CARPET TILE P PAINT AND TEXTURE ON GYP. BD.
LVP LUXURY VINYL PLANK CT PORCELAIN TILE
ETR EXISTING TO REMAIN CT PORCELAIN TILE
PT PORCELAIN TILE EPX EPOXY PAINT COATING
SC SEALED CONCRETE


BASE: CEILING:

- VB VINYL BASE P PAINT AND TEXTURE ON GYP. BD.
LAT LAT-IN ACOUSTICAL TILE

GENERAL NOTES:


1. REFER TO INTERIOR ELEVATIONS FOR ADDITIONAL INFO.
2. BASE IN BATHROOMS SHALL BE 4" TALL.

NOTE: THE WALL MURAL IN CORRIDOR 411 IS TO REMAIN. PLEASE TAKE PRECAUTIONS TO PROTECT AND PRESERVE THE MURAL DURING DEMOLITION AND CONSTRUCTION PHASES.

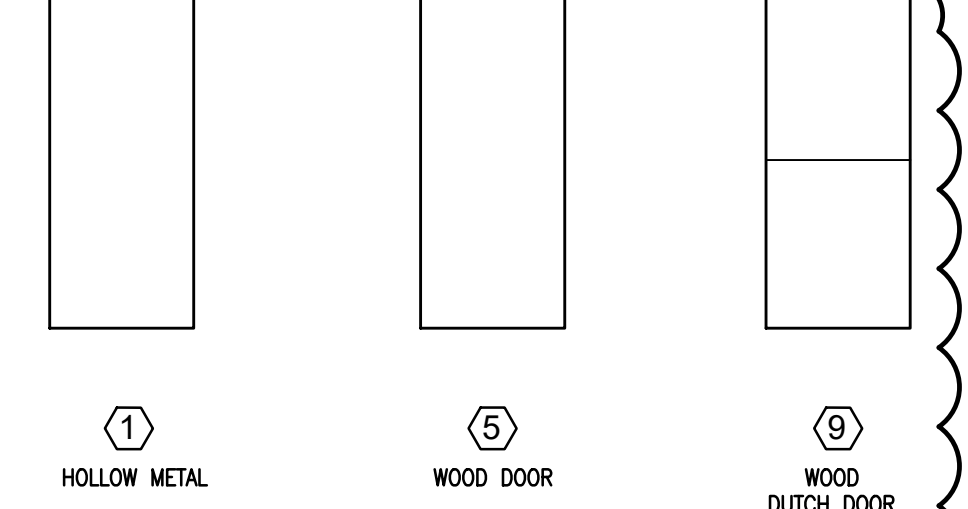


DOOR TYPE

SCALE: 1/4"=1'-0"

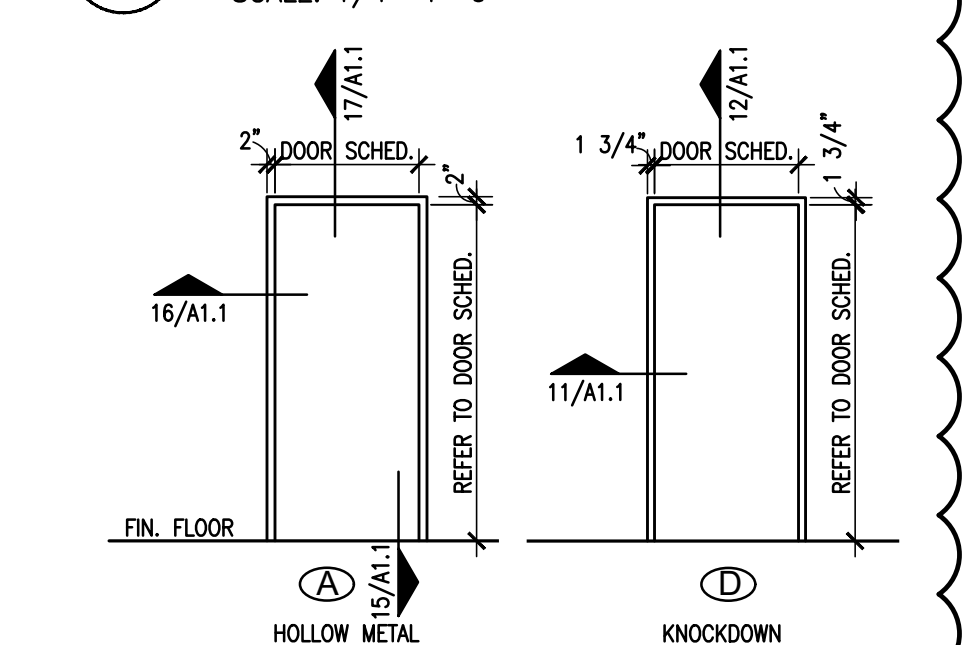

DOOR FRAME TYPE

SCALE: 1/4"=1'-0"

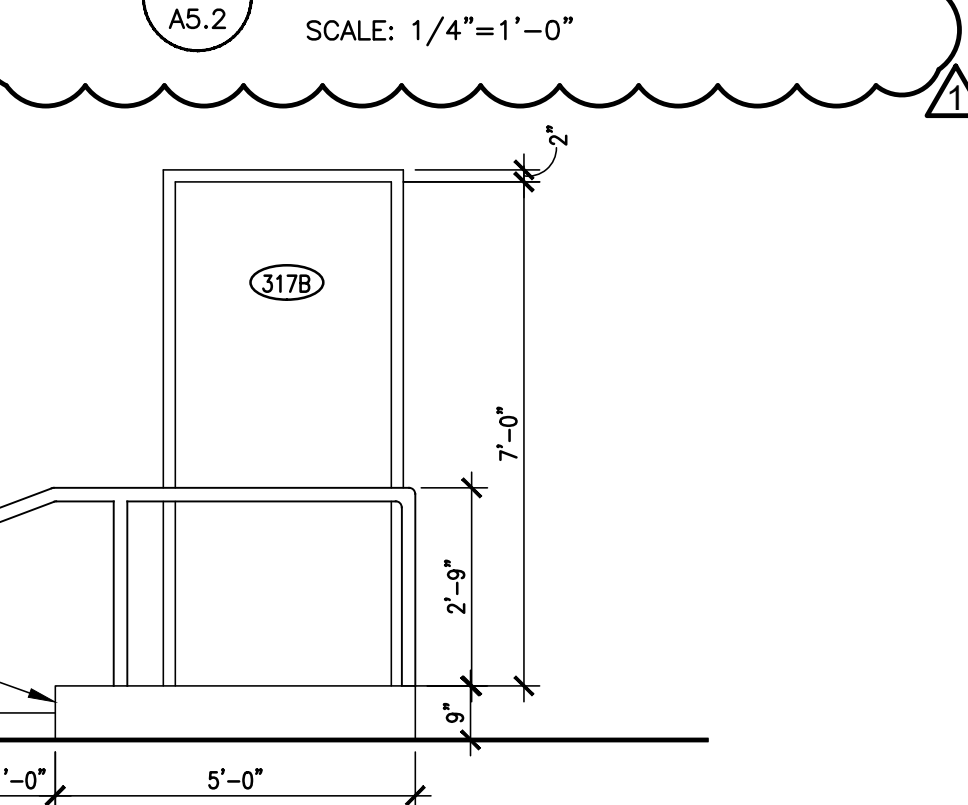

EXTERIOR WINDOW TYPE 'A'

SCALE: 1/4"=1'-0"

EXTERIOR ELEVATION

SCALE: 3/8"=1'-0"

P5 DOOR SCHEDULE

DOOR NO.	TYPE	SIZE	MATL	FRAME	FIRE	HW
204A	5	3'-0" X 7'-0"	WD	A STL	1	
204B	5	3'-0" X 7'-0"	WD	D STL	1	
220	-	8'-0" X 7'-0"	OVERHEAD GARAGE DOOR			
221	-	(2)3'-0" X 7'-0"	EXIST. RELOCATED			
301	9	3'-0" X 7'-0"	WD	A STL	2	
302	9	3'-0" X 7'-0"	WD	A STL	2	
303	5	3'-0" X 7'-0"	WD	A STL	1	
304	5	3'-0" X 7'-0"	WD	A STL	1	
305	5	3'-0" X 7'-0"	WD	A STL	1	
306	5	3'-0" X 7'-0"	WD	A STL	1	
307	5	3'-0" X 7'-0"	WD	A STL	1	
308	5	3'-0" X 7'-0"	WD	A STL	1	
309	5	3'-0" X 7'-0"	WD	D STL	4	
310	5	3'-0" X 7'-0"	WD	D STL	4	
311	5	3'-0" X 7'-0"	WD	D STL	4	
312	5	3'-0" X 7'-0"	WD	D STL	4	
313	5	3'-0" X 7'-0"	WD	D STL	1	
314	5	3'-0" X 7'-0"	WD	D STL	6	
315	5	3'-0" X 7'-0"	WD	D STL	6	
317A	5	3'-0" X 7'-0"	WD	D STL	9	
317B*	1	3'-0" X 7'-0"	STL	A HM	11	
400A	5	3'-0" X 7'-0"	WD	A STL	1	
400B	5	3'-0" X 7'-0"	WD	A STL	1	
401A	5	3'-0" X 7'-0"	WD	A STL	1	
401B	5	3'-0" X 7'-0"	WD	D STL	1	
402	5	3'-0" X 7'-0"	WD	A STL	1	
403	5	3'-0" X 7'-0"	WD	A STL	1	
404	5	3'-0" X 7'-0"	WD	A STL	1	
405	5	3'-0" X 7'-0"	WD	A STL	1	
406	5	3'-0" X 7'-0"	WD	A STL	1	
407	5	3'-0" X 7'-0"	WD	A STL	1	
408	5	3'-0" X 7'-0"	WD	A STL	1	
409	5	3'-0" X 7'-0"	WD	A STL	1	
410	5	3'-0" X 7'-0"	WD	D STL	3	
413A	5	3'-0" X 7'-0"	WD	D STL	9	
413B*	1	3'-0" X 7'-0"	STL	A HM	11	

GENERAL NOTES:


1. ALL DOORS TO BE 1 3/4" U.N.O.
2. EXIT DEVICES SHALL COME WITH LOCKING LOCKSET ON OPPOSING SIDE OF DOOR.
3. DOOR SURFACES WITHIN 10" OF THE FINISH FLOOR OR GROUND MEASURED VERTICALLY SHALL HAVE A SMOOTH SURFACE ON THE PUSH SIDE EXTENDING THE FULL WIDTH OF THE DOOR.
4. ALL DOORS ARE TO BE PAINTED EXCEPT FOR DOORS IN PHASE 1.
5. NO VISION PANELS ON TOILET ENTRY DOORS.


DOOR/FRAME MATERIAL

- PLAM PLASTIC LAMINATE CLAD STL STEEL
HM HOLLOW/PRESSED METAL ALUM. ALUMINUM STOREFRONT
MTL METAL
* RELOCATE EXIST. EXTERIOR DOORS


GENERAL FLOOR PLAN NOTES

1. REFER TO MEP DRAWINGS FOR MORE INFORMATION.
2. ALL DIMENSIONS ARE TO FACE OF STUD OR TO FACE OF MASONRY UNLESS NOTED OTHERWISE. MASONRY DIMENSIONS ARE NOMINAL UNLESS NOTED OTHERWISE.
3. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND INFORM THE OWNER AND ARCHITECT OF ANY CONFLICT PRIOR TO THE COMMENCEMENT OF WORK.
4. PROVIDE WOOD BLOCKING FOR ALL ITEMS OR EQUIPMENT FASTENING INTO DRYWALL PARTITIONS, TYPICAL FOR TV LOCATIONS, PROVIDE 12" HIGH X 16" WIDE BLOCKING W/ CENTER AT 60" A.F.F. FOR BEDSIDE TV'S PROVIDE BLOCKING AS RECOMMENDED BY MANUFACTURER.
5. ALL PUBLIC USE DOORS SHALL HAVE HC ACCESSIBLE CLEAR FLOOR SPACE. NOTIFY ARCHITECT OF ANY CONFLICT TO COMPLIANCE.
6. REFER TO SHEET G2.1 & G2.2 FOR ACCESSIBILITY REQUIREMENT INCLUDING CLEAR FLOOR SPACE, MOUNTING HEIGHTS, CABINET CLEARANCES, ETC... THAT MUST BE MAINTAINED.
7. SEAL ALL PENETRATIONS IN RATED ASSEMBLIES TO MAINTAIN THE REQUIRED RATING.
8. WHERE WALLS AND PARTITIONS ARE REQUIRED TO HAVE A 1 HOUR FIRE RATED ASSEMBLY, STEEL ELECTRICAL BOXES ON OPPOSITE SIDES OF THE WALL SHALL BE SEPARATED BY THE FOLLOWING:
A. BY HORIZONTAL DISTANCE OF NOT LESS THAN 24 INCHES.
B. BY SOLID FIRE BLOCKING IN ACCORDANCE WITH SECTION 717.2.1 OF 2018 INTERNATIONAL BUILDING CODE, WHICH STATES THAT FIRE BLOCKING MATERIALS SHALL CONSIST OF 2-INCH NOMINAL LUMBER.
C. BY PROTECTING BOTH OUTLET BOXES WITH LISTED PUTTY PADS.
9. WHERE OCCUPIED SPACES ARE OPEN TO DECK, EXPOSED STRUCTURE, PIPE, DUCTWORK, AND DRYWALL SHALL BE PREPARED FOR PAINT.
10. FLOORING TRANSITIONS BETWEEN ROOMS SHALL OCCUR BENEATH DOORS IN THE CLOSED POSITIONS, TYP.

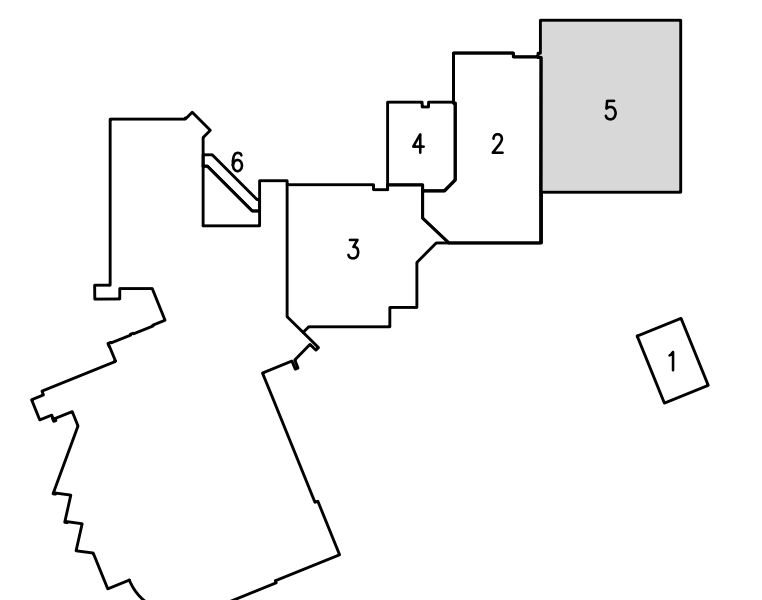


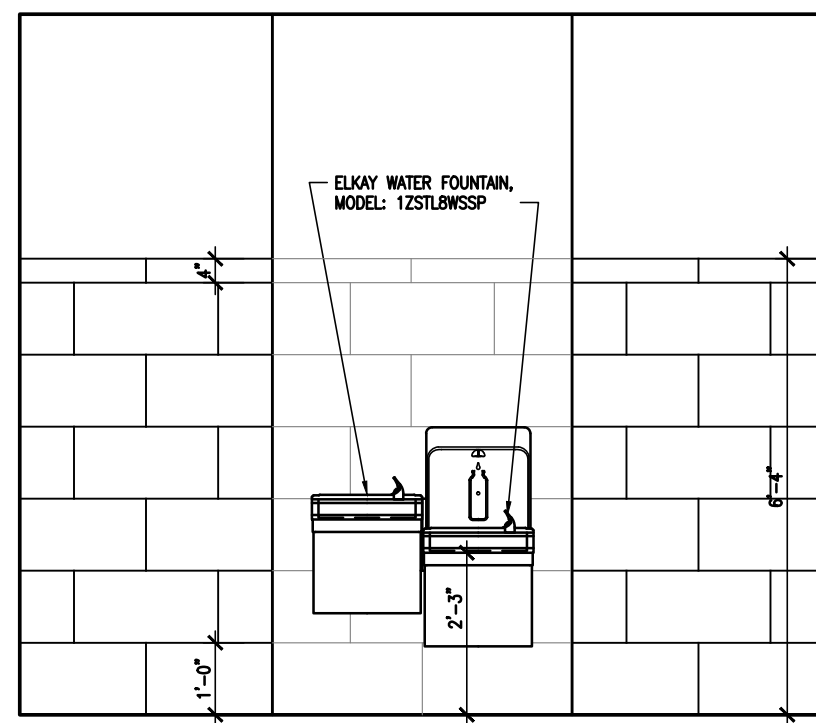


11 INTERIOR ELEVATION
A5.3 SCALE: 3/8"=1'-0"

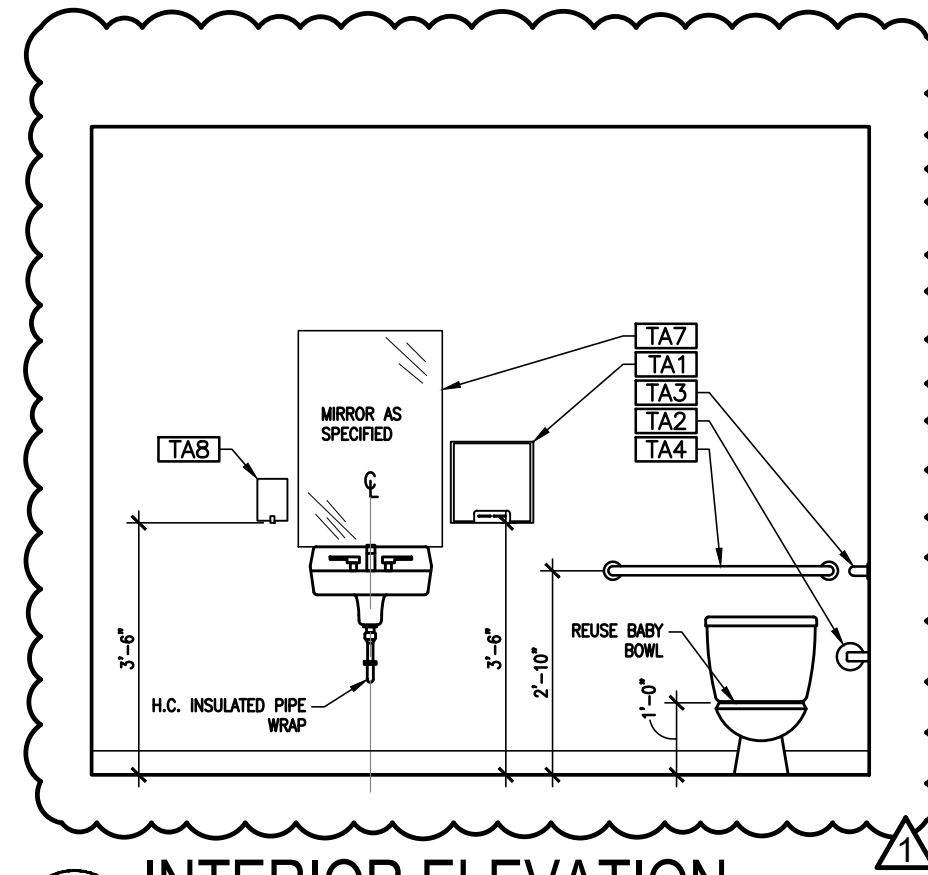


10 INTERIOR ELEVATION
A5.3 SCALE: 3/8"=1'-0"

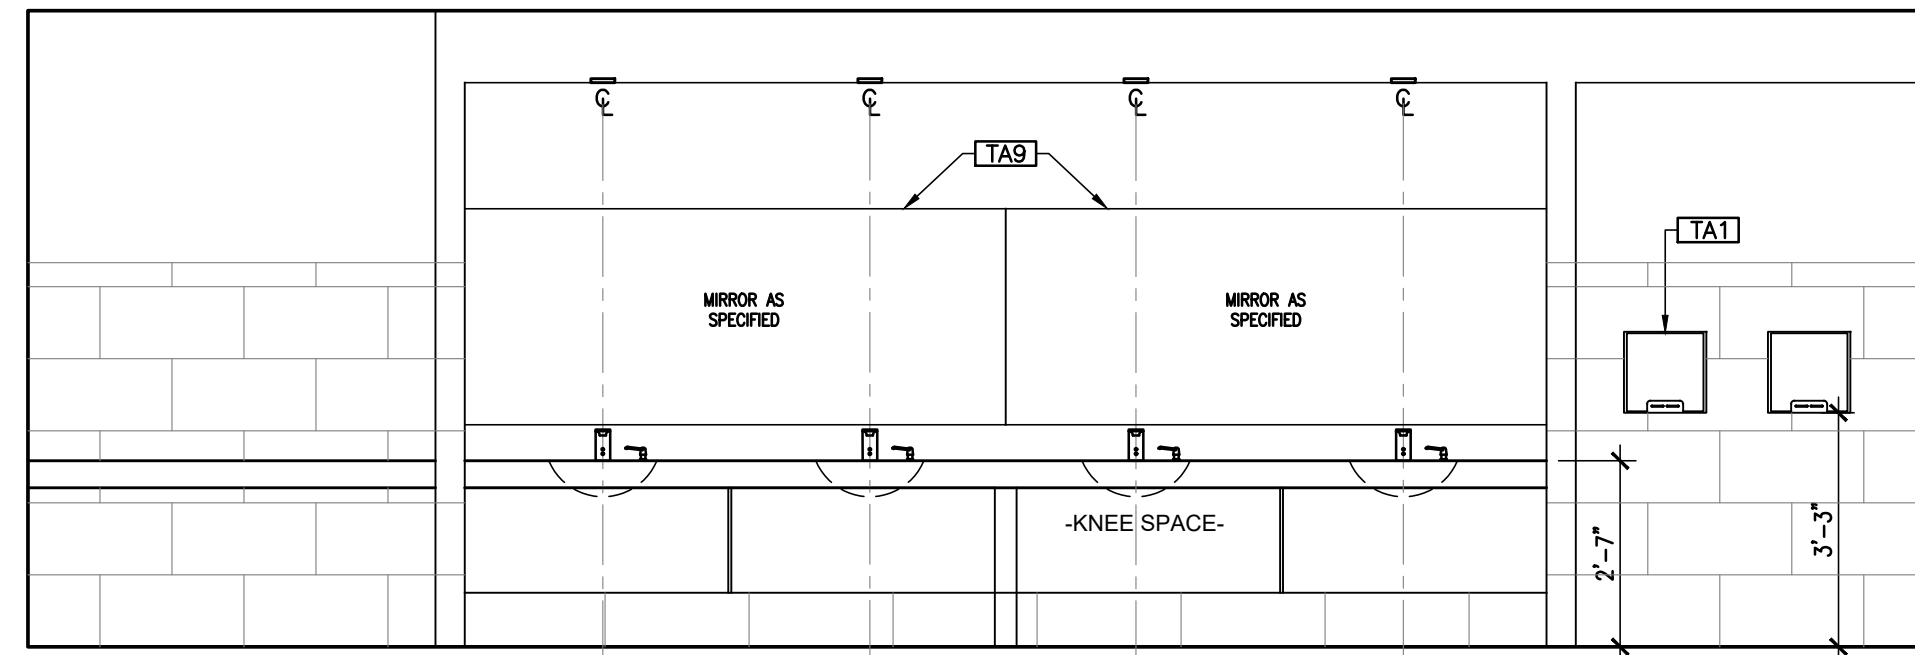


08 INTERIOR ELEVATION - WOMENS
A5.3 SCALE: 3/8"=1'-0"

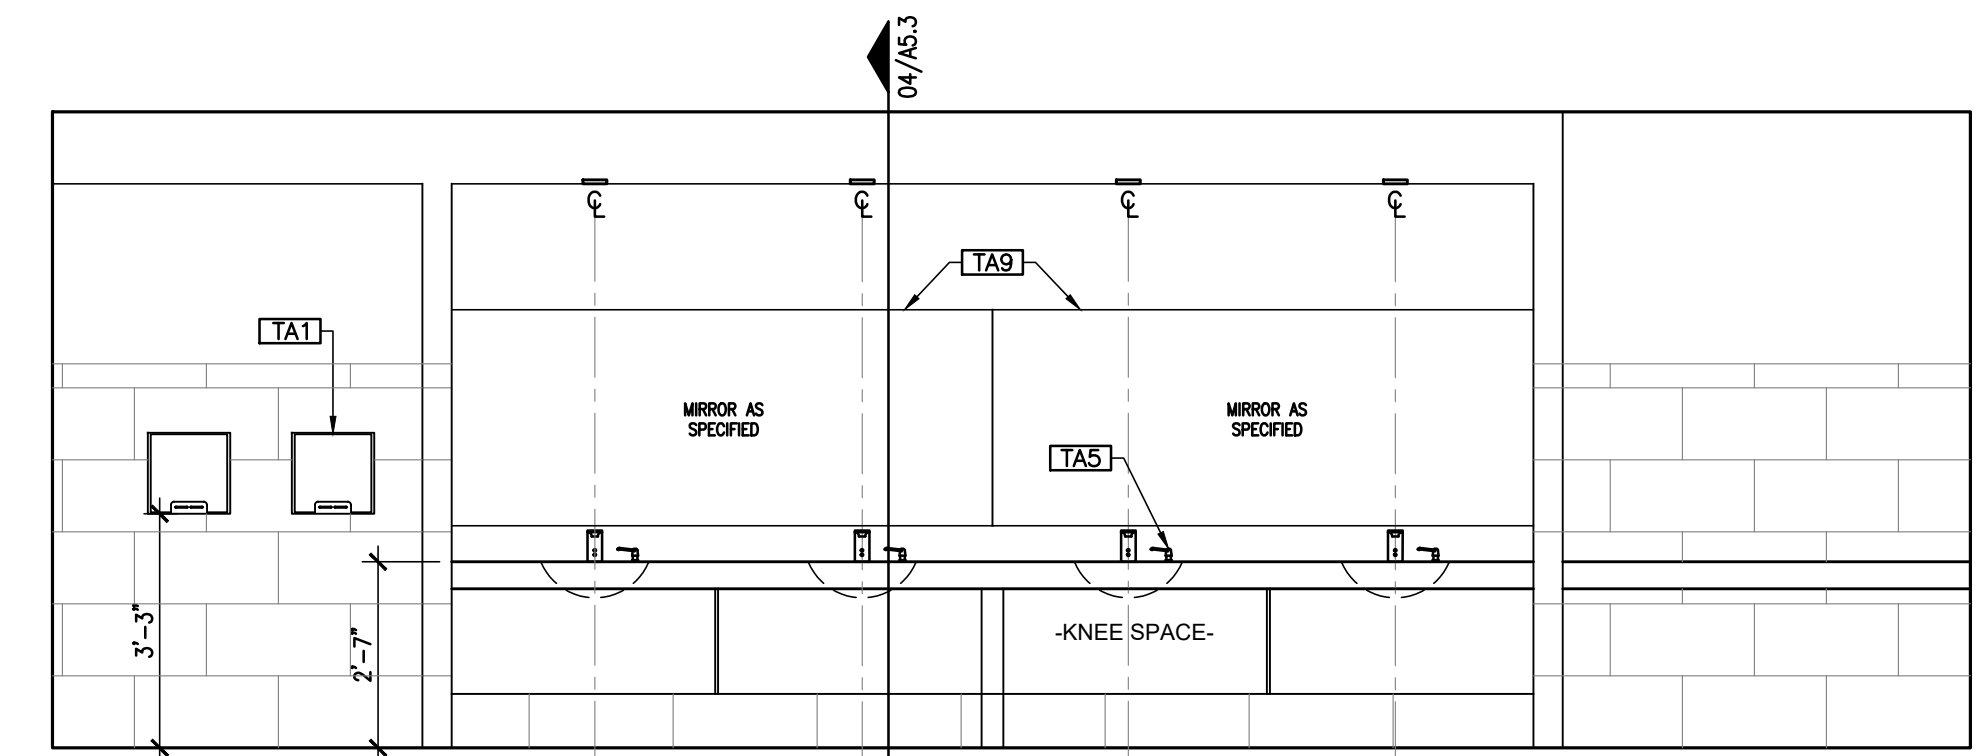


06 INTERIOR ELEVATION - MENS
A5.3 SCALE: 3/8"=1'-0"

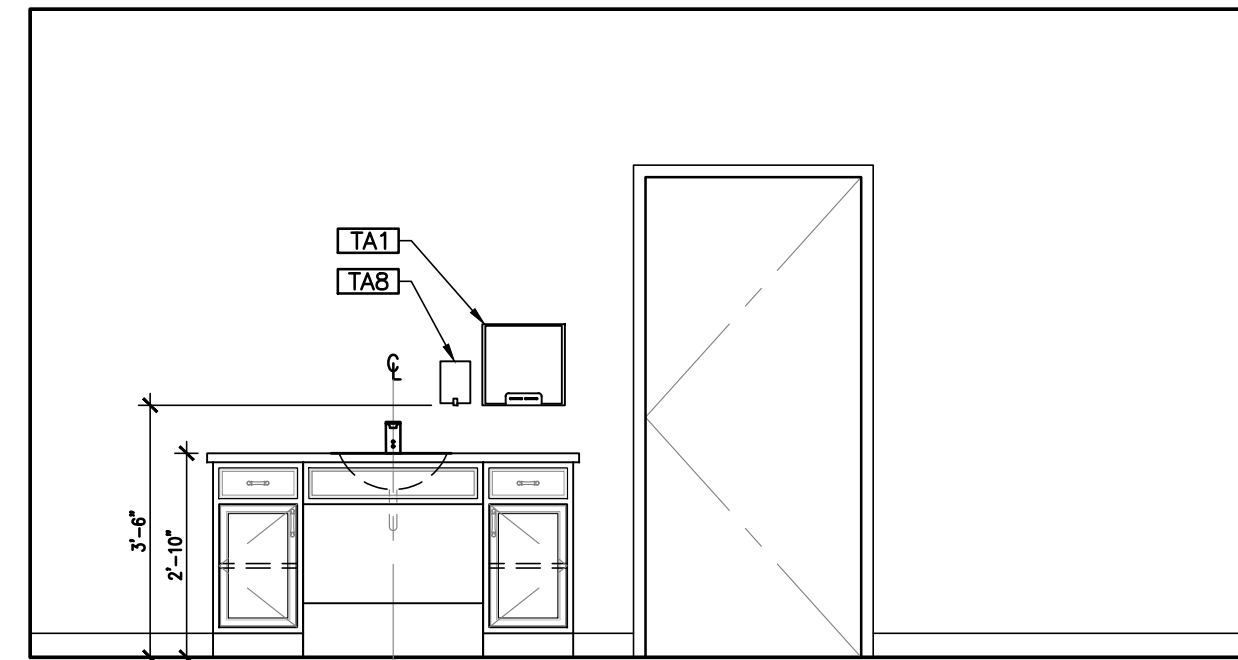


09 INTERIOR ELEVATION
A5.3 SCALE: 3/8"=1'-0"

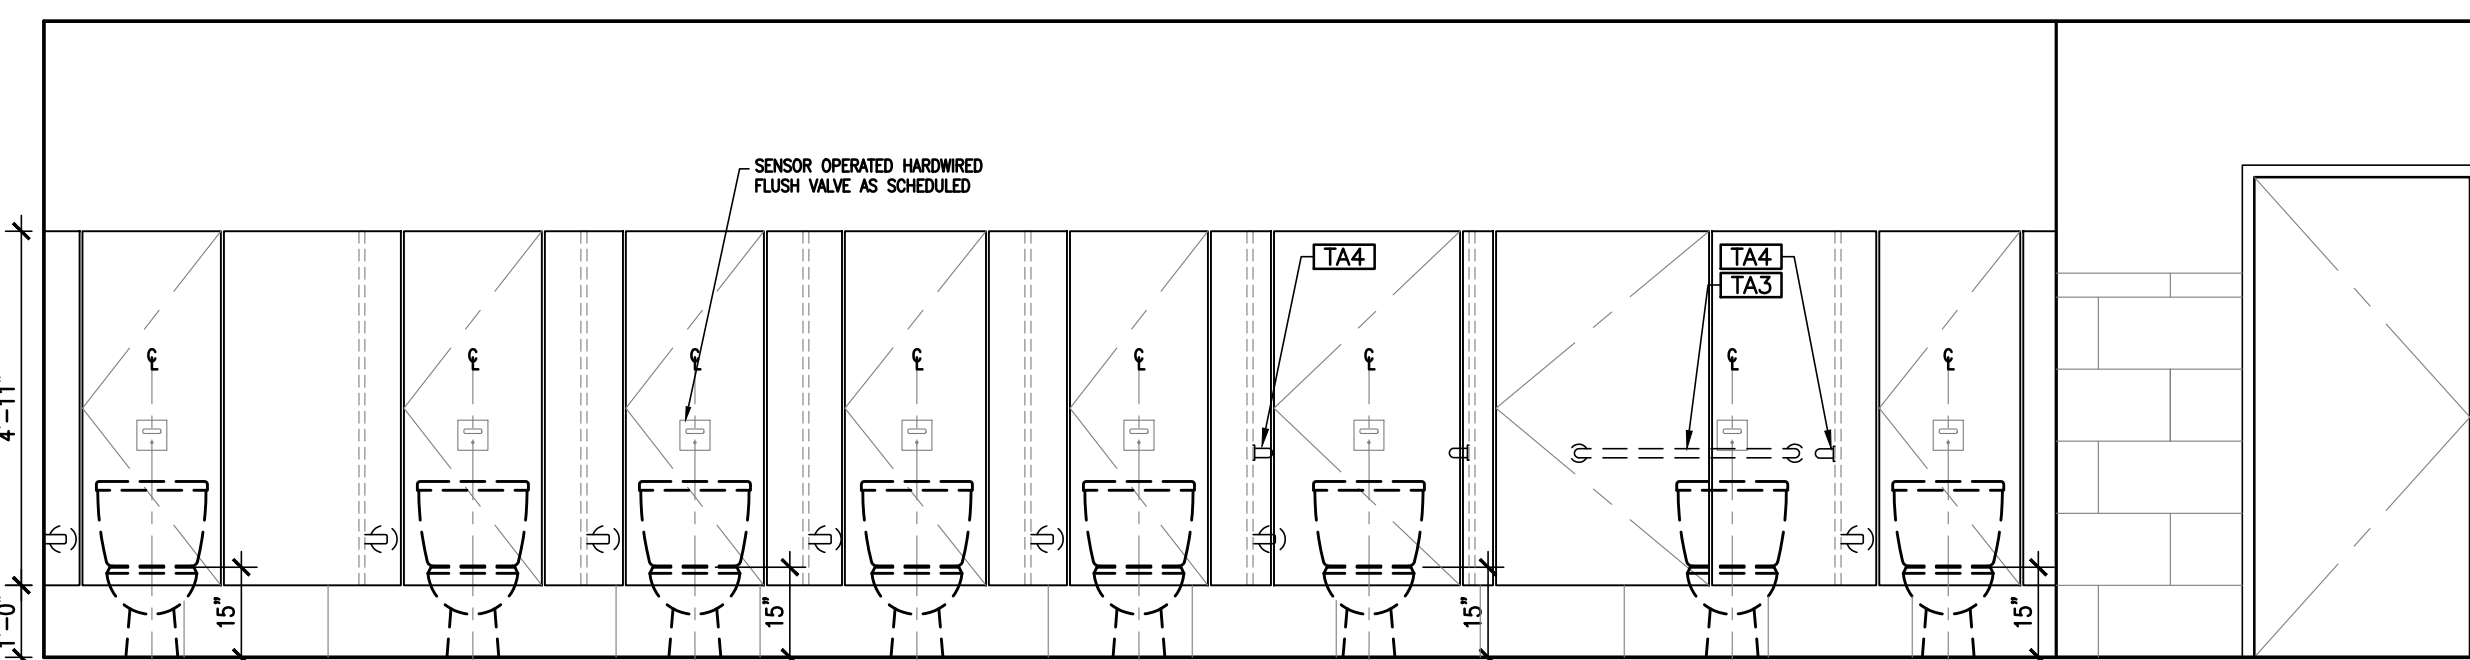

07 INTERIOR ELEVATION - WOMENS
A5.3 SCALE: 3/8"=1'-0"

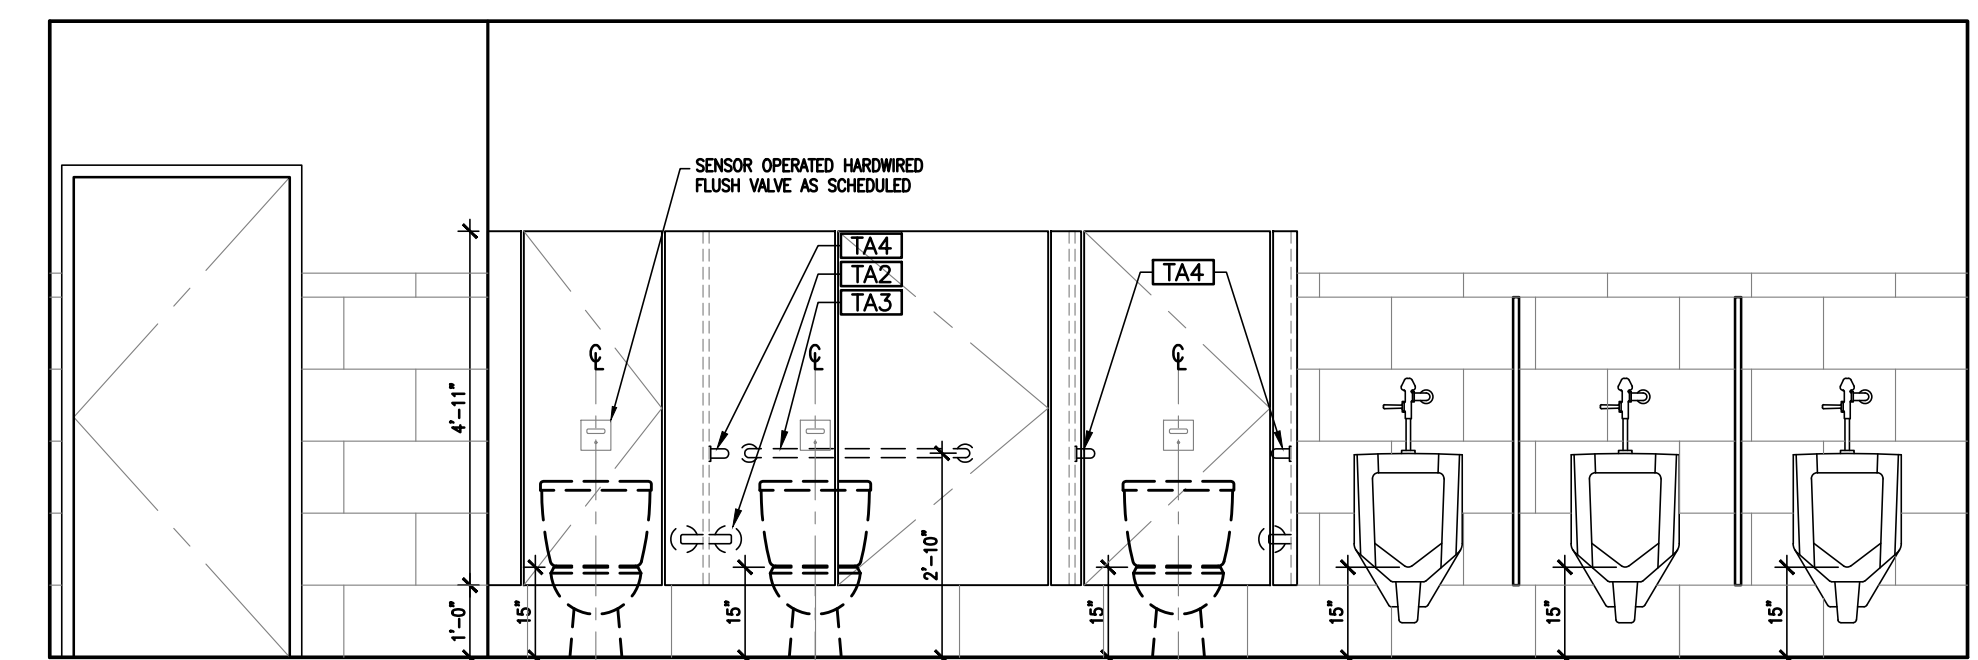


05 INTERIOR ELEVATION - MENS
A5.3 SCALE: 3/8"=1'-0"

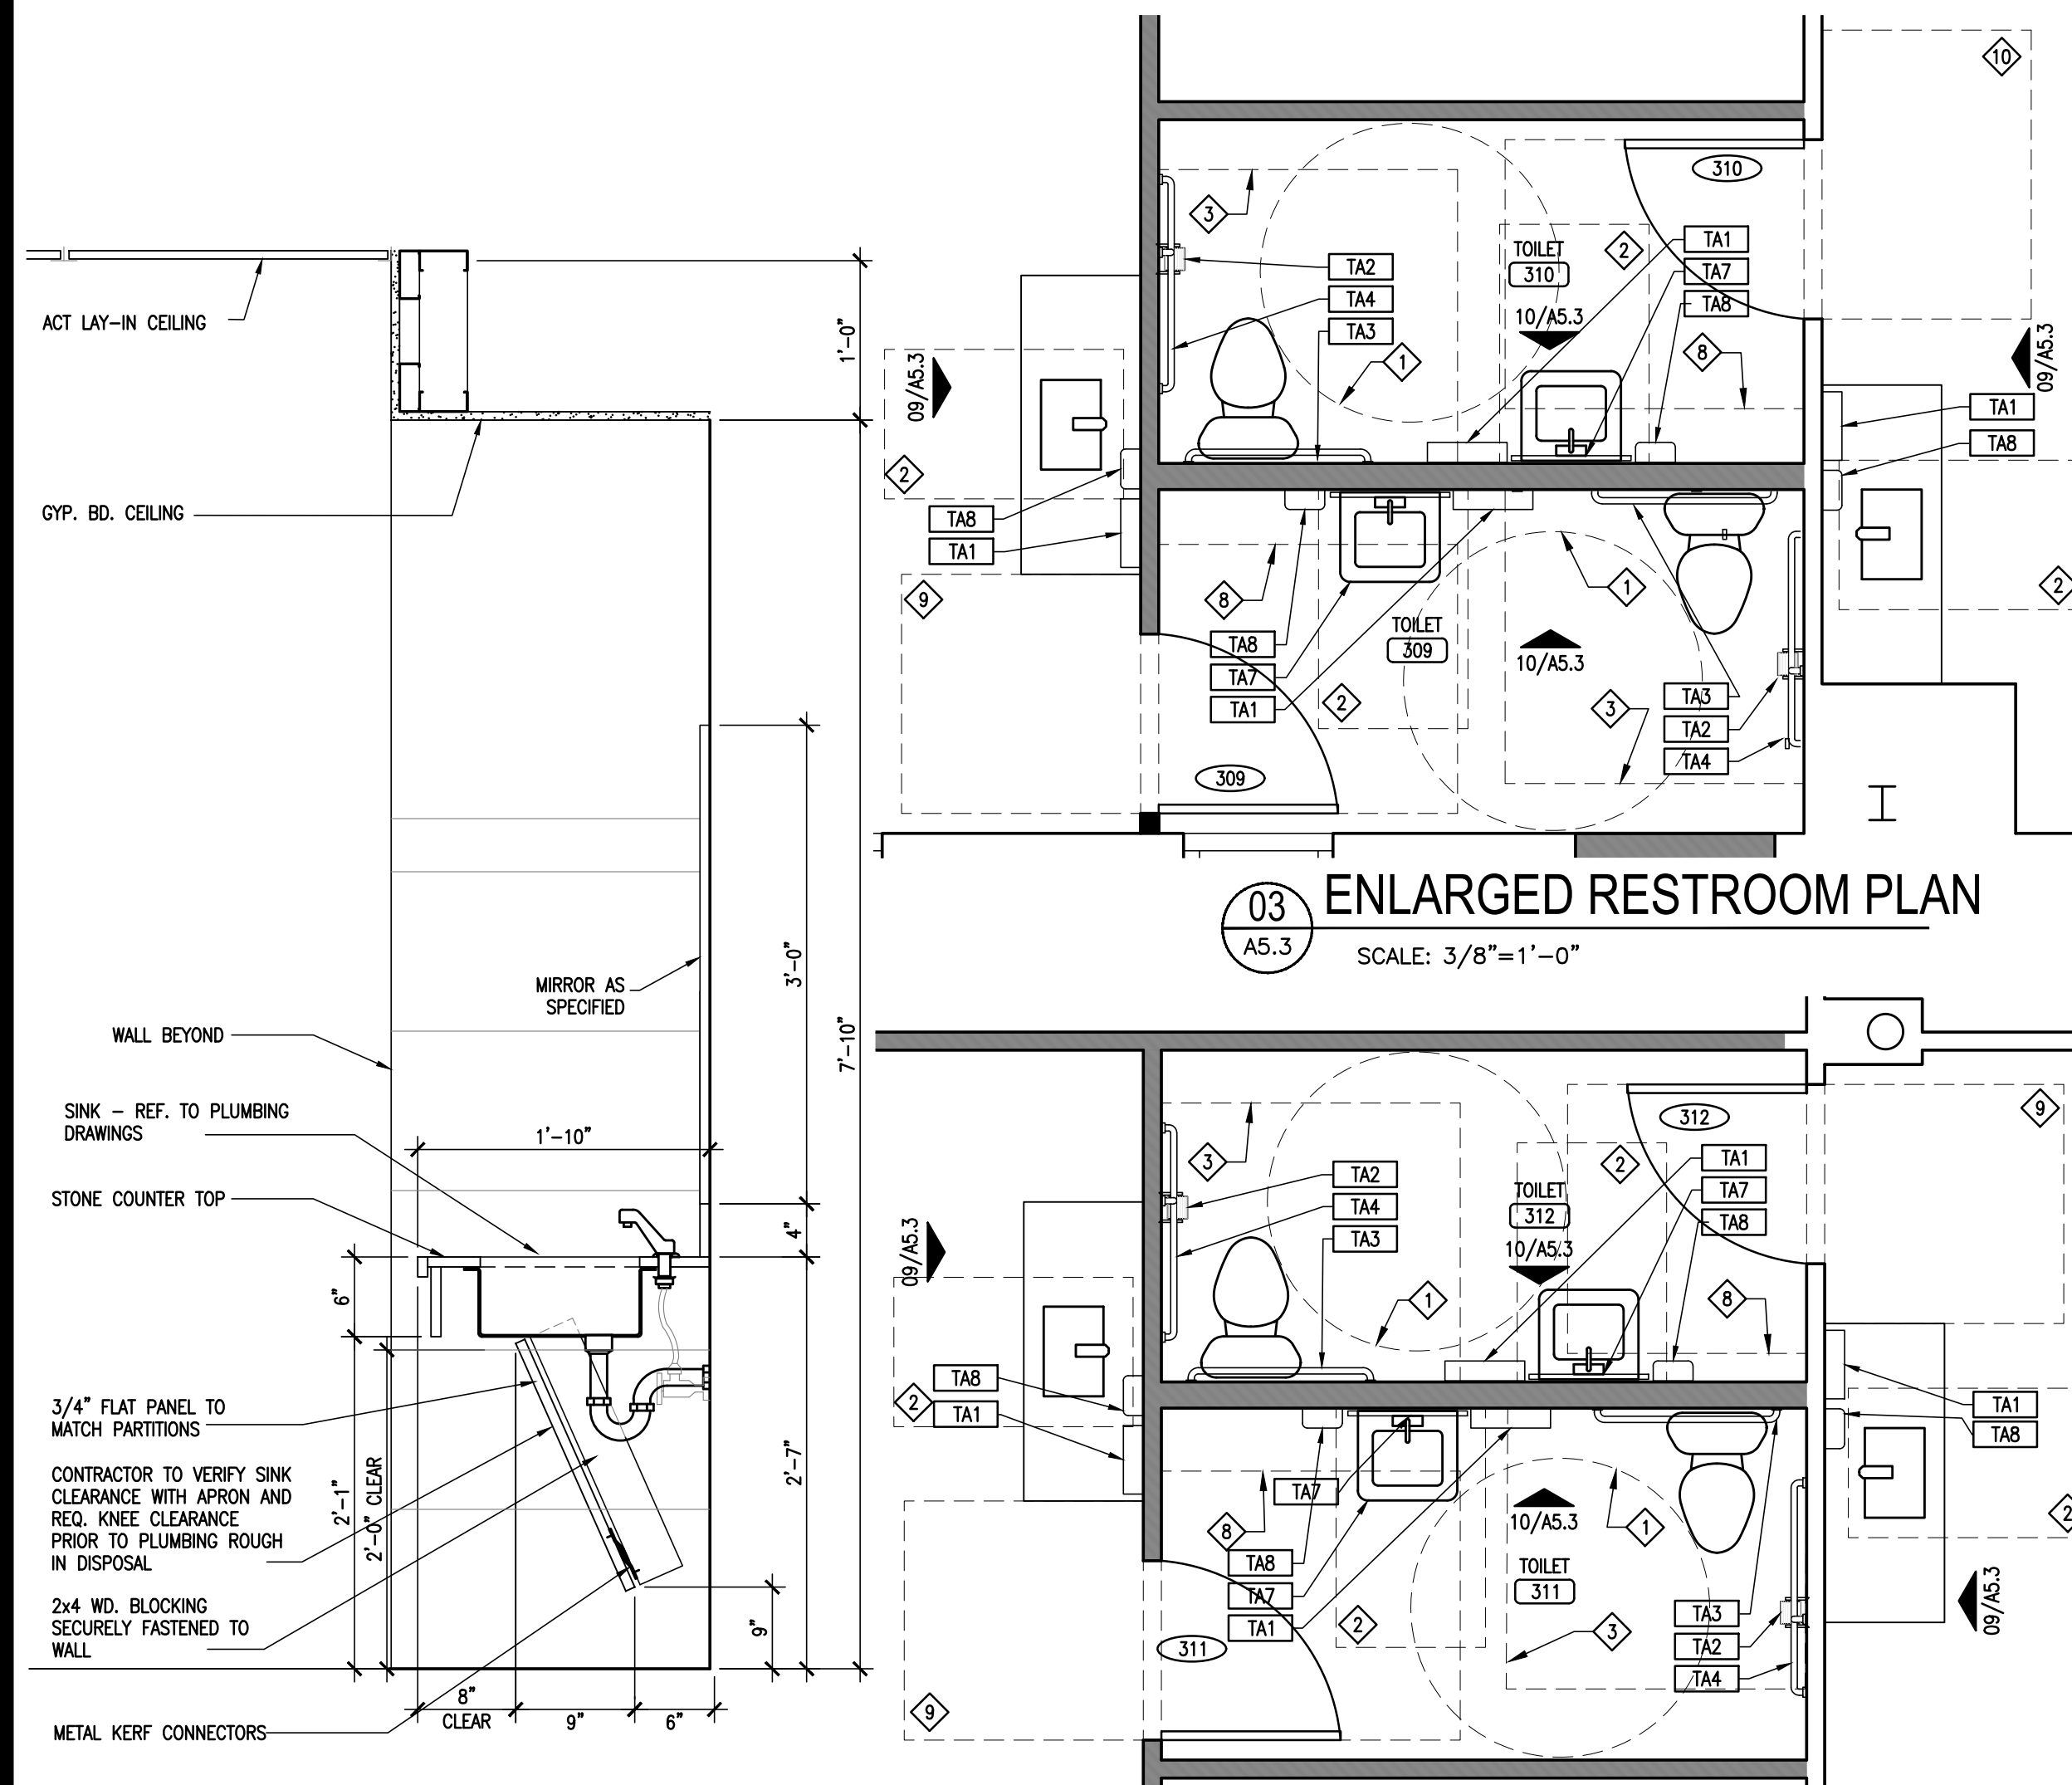


03 ENLARGED RESTROOM PLAN
A5.3 SCALE: 3/8"=1'-0"

04 LAVATORY DETAIL
A5.3 SCALE: 1"=1'-0"

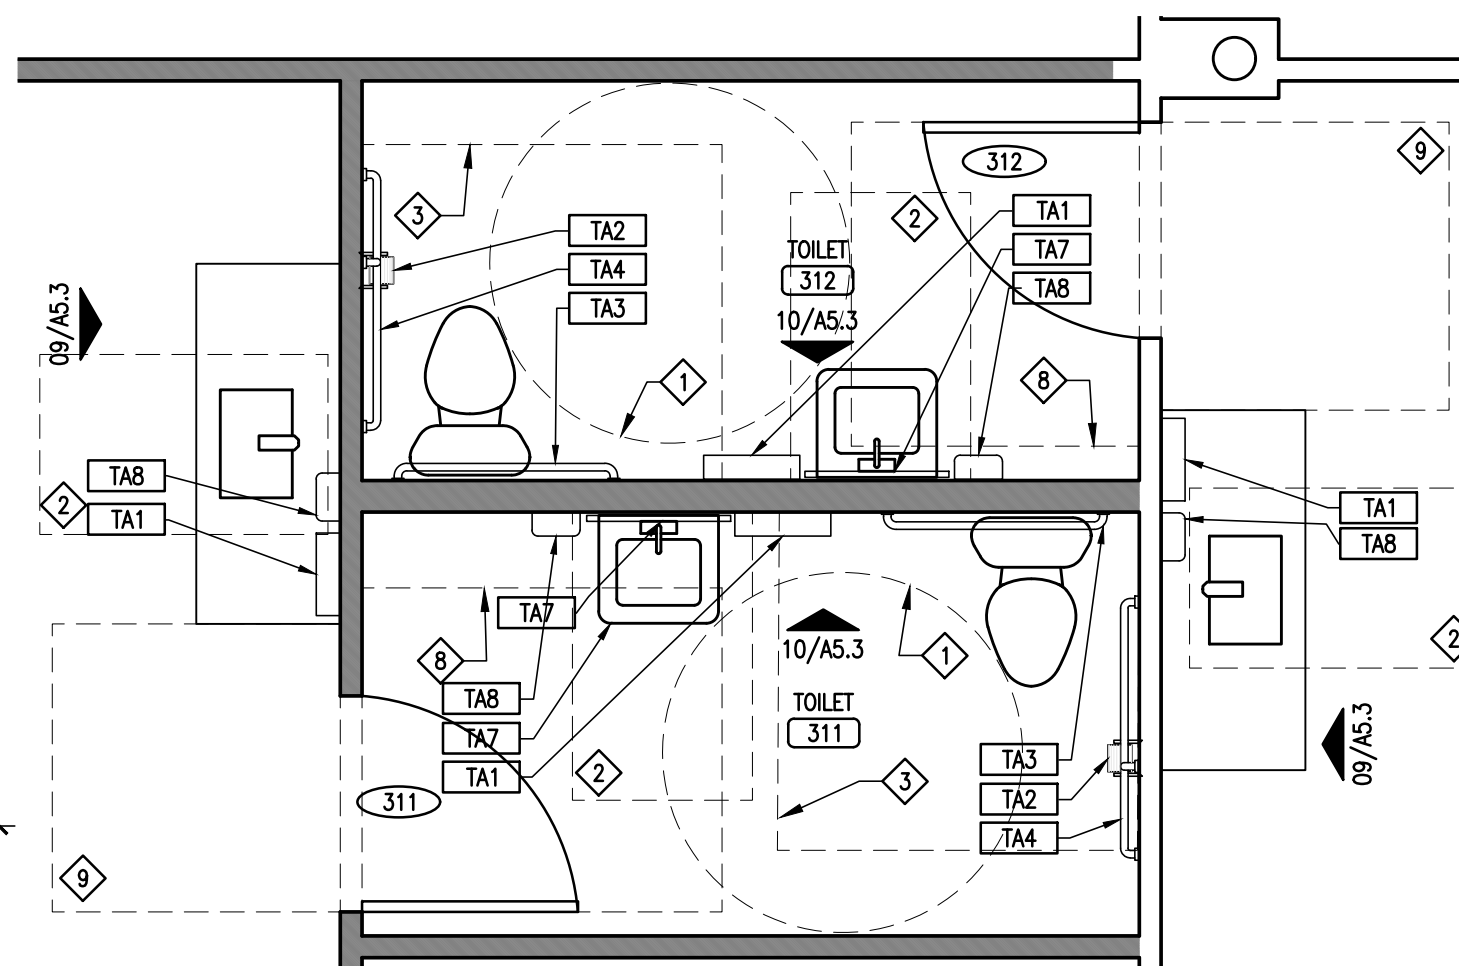


02 ENLARGED RESTROOM PLAN
A5.3 SCALE: 3/8"=1'-0"

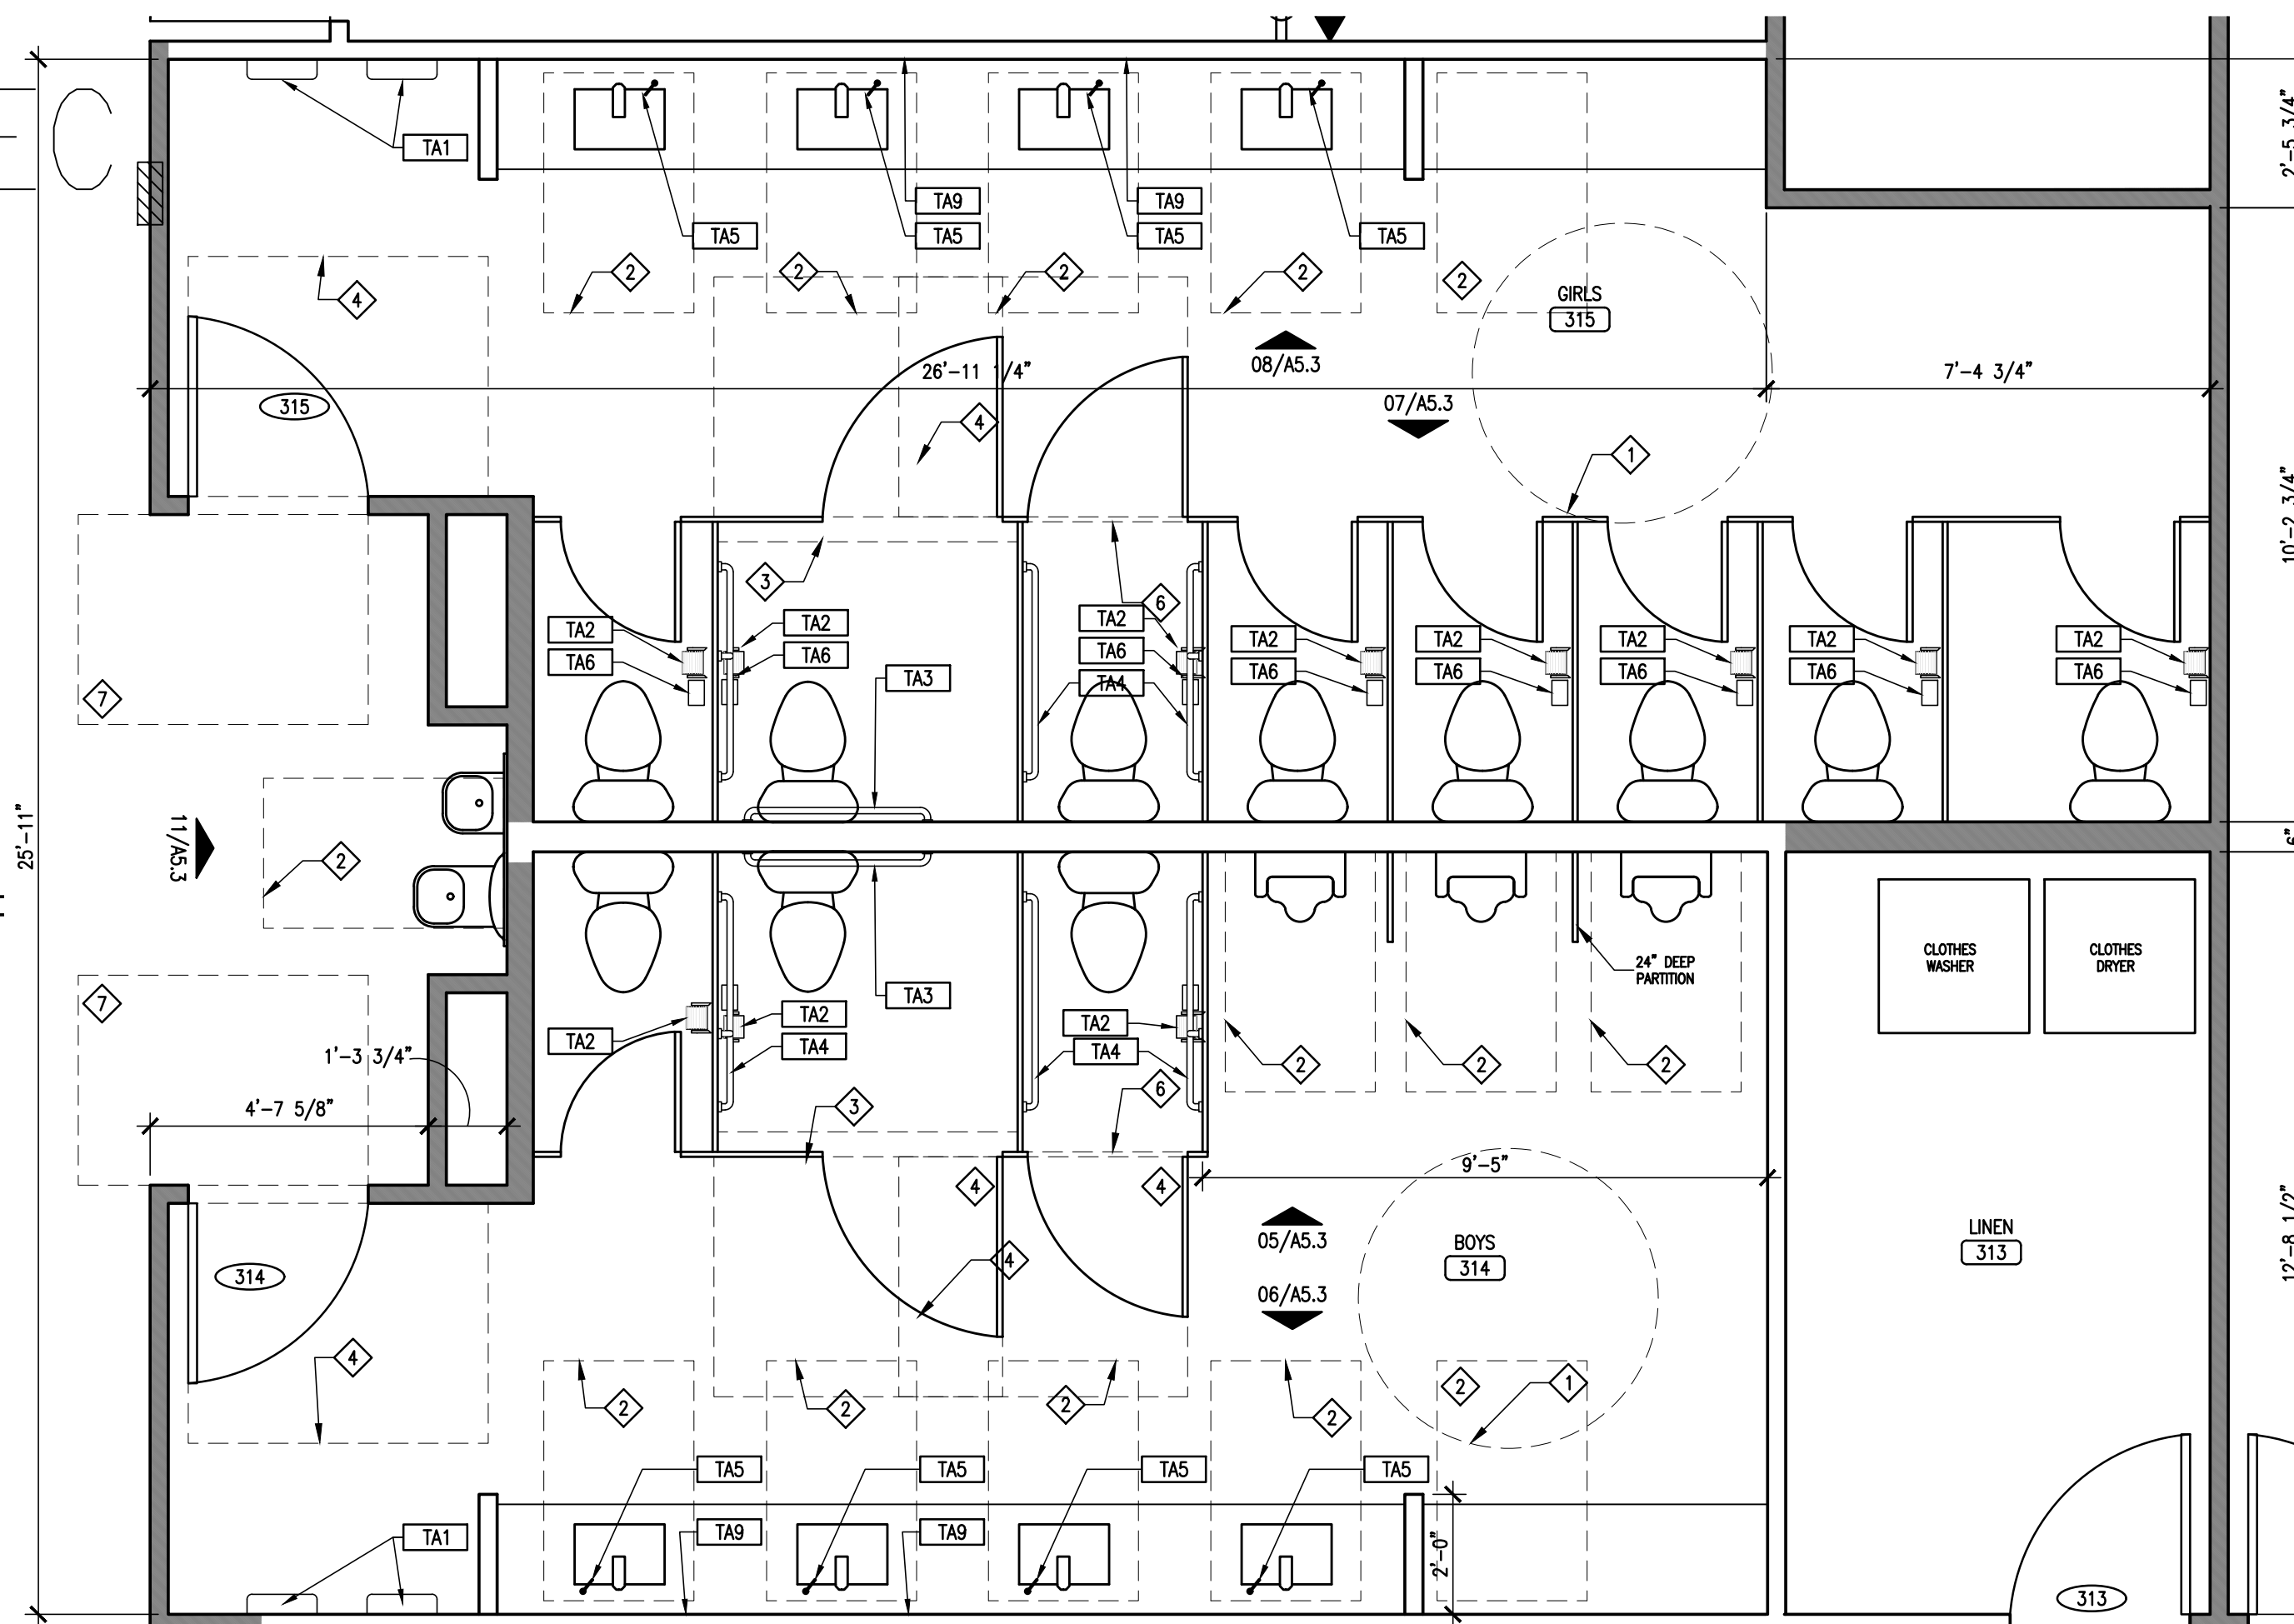

01 ENLARGED RESTROOM PLAN
A5.3 SCALE: 3/8"=1'-0"

TOILET ACCESSORIES	
TA1	ENMOTION PAPER TOWEL DISPENSER - WALL MOUNTED
TA2	TOILET TISSUE DISPENSER - DOUBLE ROLL
TA3	36" GRAB BAR
TA4	42" GRAB BAR
TA5	AUTOMATIC SOAP DISPENSER - DECK MOUNTED
TA6	SANITARY NAPKIN DISPOSAL UNIT
TA7	24" X 36" WALL MOUNTED MIRROR
TA8	SOAP DISPENSER - WALL MOUNTED
TA9	UNFRAMED MIRROR
SPECIFIC ACCESSORIES LISTED IN SECTION 10 28 13	

CLEAR FLOOR SPACE	
1	60" TURNING DIAMETER
2	30" x 48" CLEAR FLOOR SPACE
3	60" x 56" CLEAR FLOOR SPACE
4	48" x 60" CLEAR FLOOR SPACE
5	36" x 48" CLEAR FLOOR SPACE
6	36" x 60" CLEAR FLOOR SPACE
7	42" x 58" CLEAR FLOOR SPACE
8	54" x 60" CLEAR FLOOR SPACE
9	48" x 48" CLEAR FLOOR SPACE
10	58" x 42" CLEAR FLOOR SPACE

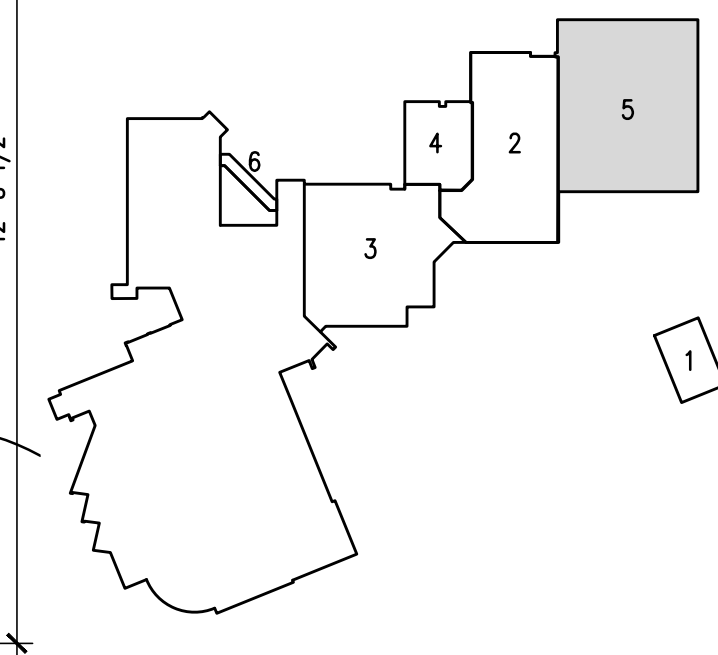

KEY PLAN

GENERAL RCP NOTES



- A. ALL 1 HOUR PARTITION WALLS SHALL TERMINATE TO THE BOTTOM OF THE 1-HOUR ROOF/CEILING ASSEMBLY.
- B. ALL PENETRATIONS THROUGH RATED WALLS SHALL BE FIRE-STOPPED AS REQUIRED TO MAINTAIN WALL RATING.
- C. COORDINATE LIGHT FIXTURE LOCATIONS WITH DOORS, MECHANICAL EQUIPMENT AND FIRE SPRINKLERS. NOTIFY THE ARCHITECT IF THERE IS A DISCREPANCY.
- D. RELOCATE EXISTING HVAC AIR DEVICES AS REQUIRED. EXTEND OR OTHERWISE MODIFY DUCTWORK TO MAINTAIN PROPER PERFORMANCE OF THE SYSTEM.
- E. RELOCATE FIRE SUPPRESSION SPRINKLER HEADS AS REQUIRED. EXTEND OR MODIFY PIPING AS REQUIRED TO RESULT IN A CODE COMPLIANT SYSTEM. THE SPRINKLER CONTRACTOR SHALL PROVIDE ENGINEERED DESIGN AND SUBMIT TO THE CITY FOR APPROVAL.

RCP LEGEND

- 2x4 LAY-IN TROFFER LED LIGHT FIXTURE
- 2x2 LAY-IN TROFFER LED LIGHT FIXTURE
- SURFACE MOUNT LED LIGHT FIXTURE
- WALL PACK
- SCONCE WALL MOUNT FIXTURE
- PENDANT WALL MOUNT FIXTURE
- LED COVE STRIP LIGHT
- WALL MOUNTED LIGHT FIXTURE
- PENDANT LIGHT/ CHANDELIER
- RECESSED DOWNLIGHT FIXTURE
- EXIT LIGHT
- SUSPENDED CEILING
- AREA NOT AFFECTED DURING THIS PHASE

RCP NOTES BY NUMBER (#)


1. 2x2 A.C.T. SUSPENDED CEILING W/ 6" R-19 FIBERGLASS INSULATION OVER.
2. NEW 1-HR FIRE RATED GYPSUM BOARD CEILING, GA FILE NO. RC-2801. RE: RCP AND DETAILS.
3. EXISTING CEILING AND LIGHTING TO REMAIN.
4. REPLACE FABRIC ON EXISTING METAL AWNING STRUCTURE.
5. LIGHT COVE WITH LED COVE STRIP LIGHT.
6. CEILING OPEN TO DECK.
7. PENDANT LIGHTING SUSPENDED FROM ROOF STRUCTURE.
8. DECORATIVE RECESSED WOOD RAFTERS/BEAMS.
9. SUSPENDED LINEAR LIGHT FIXTURE.
10. EXISTING LIGHTING FIXTURE TO REMAIN.

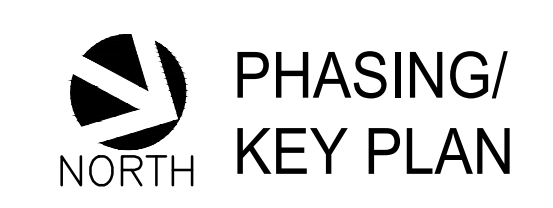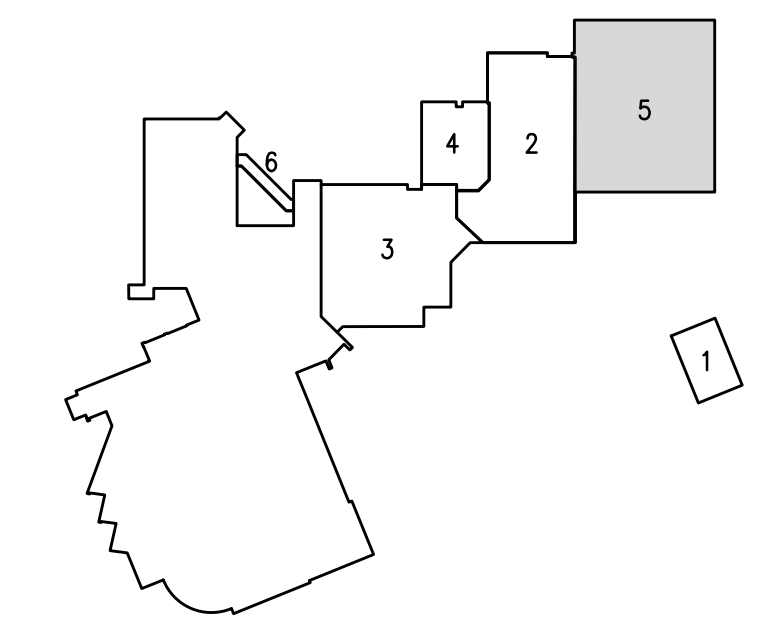

PHASE 5 RCP




SCALE: 1/8"=1'-0"

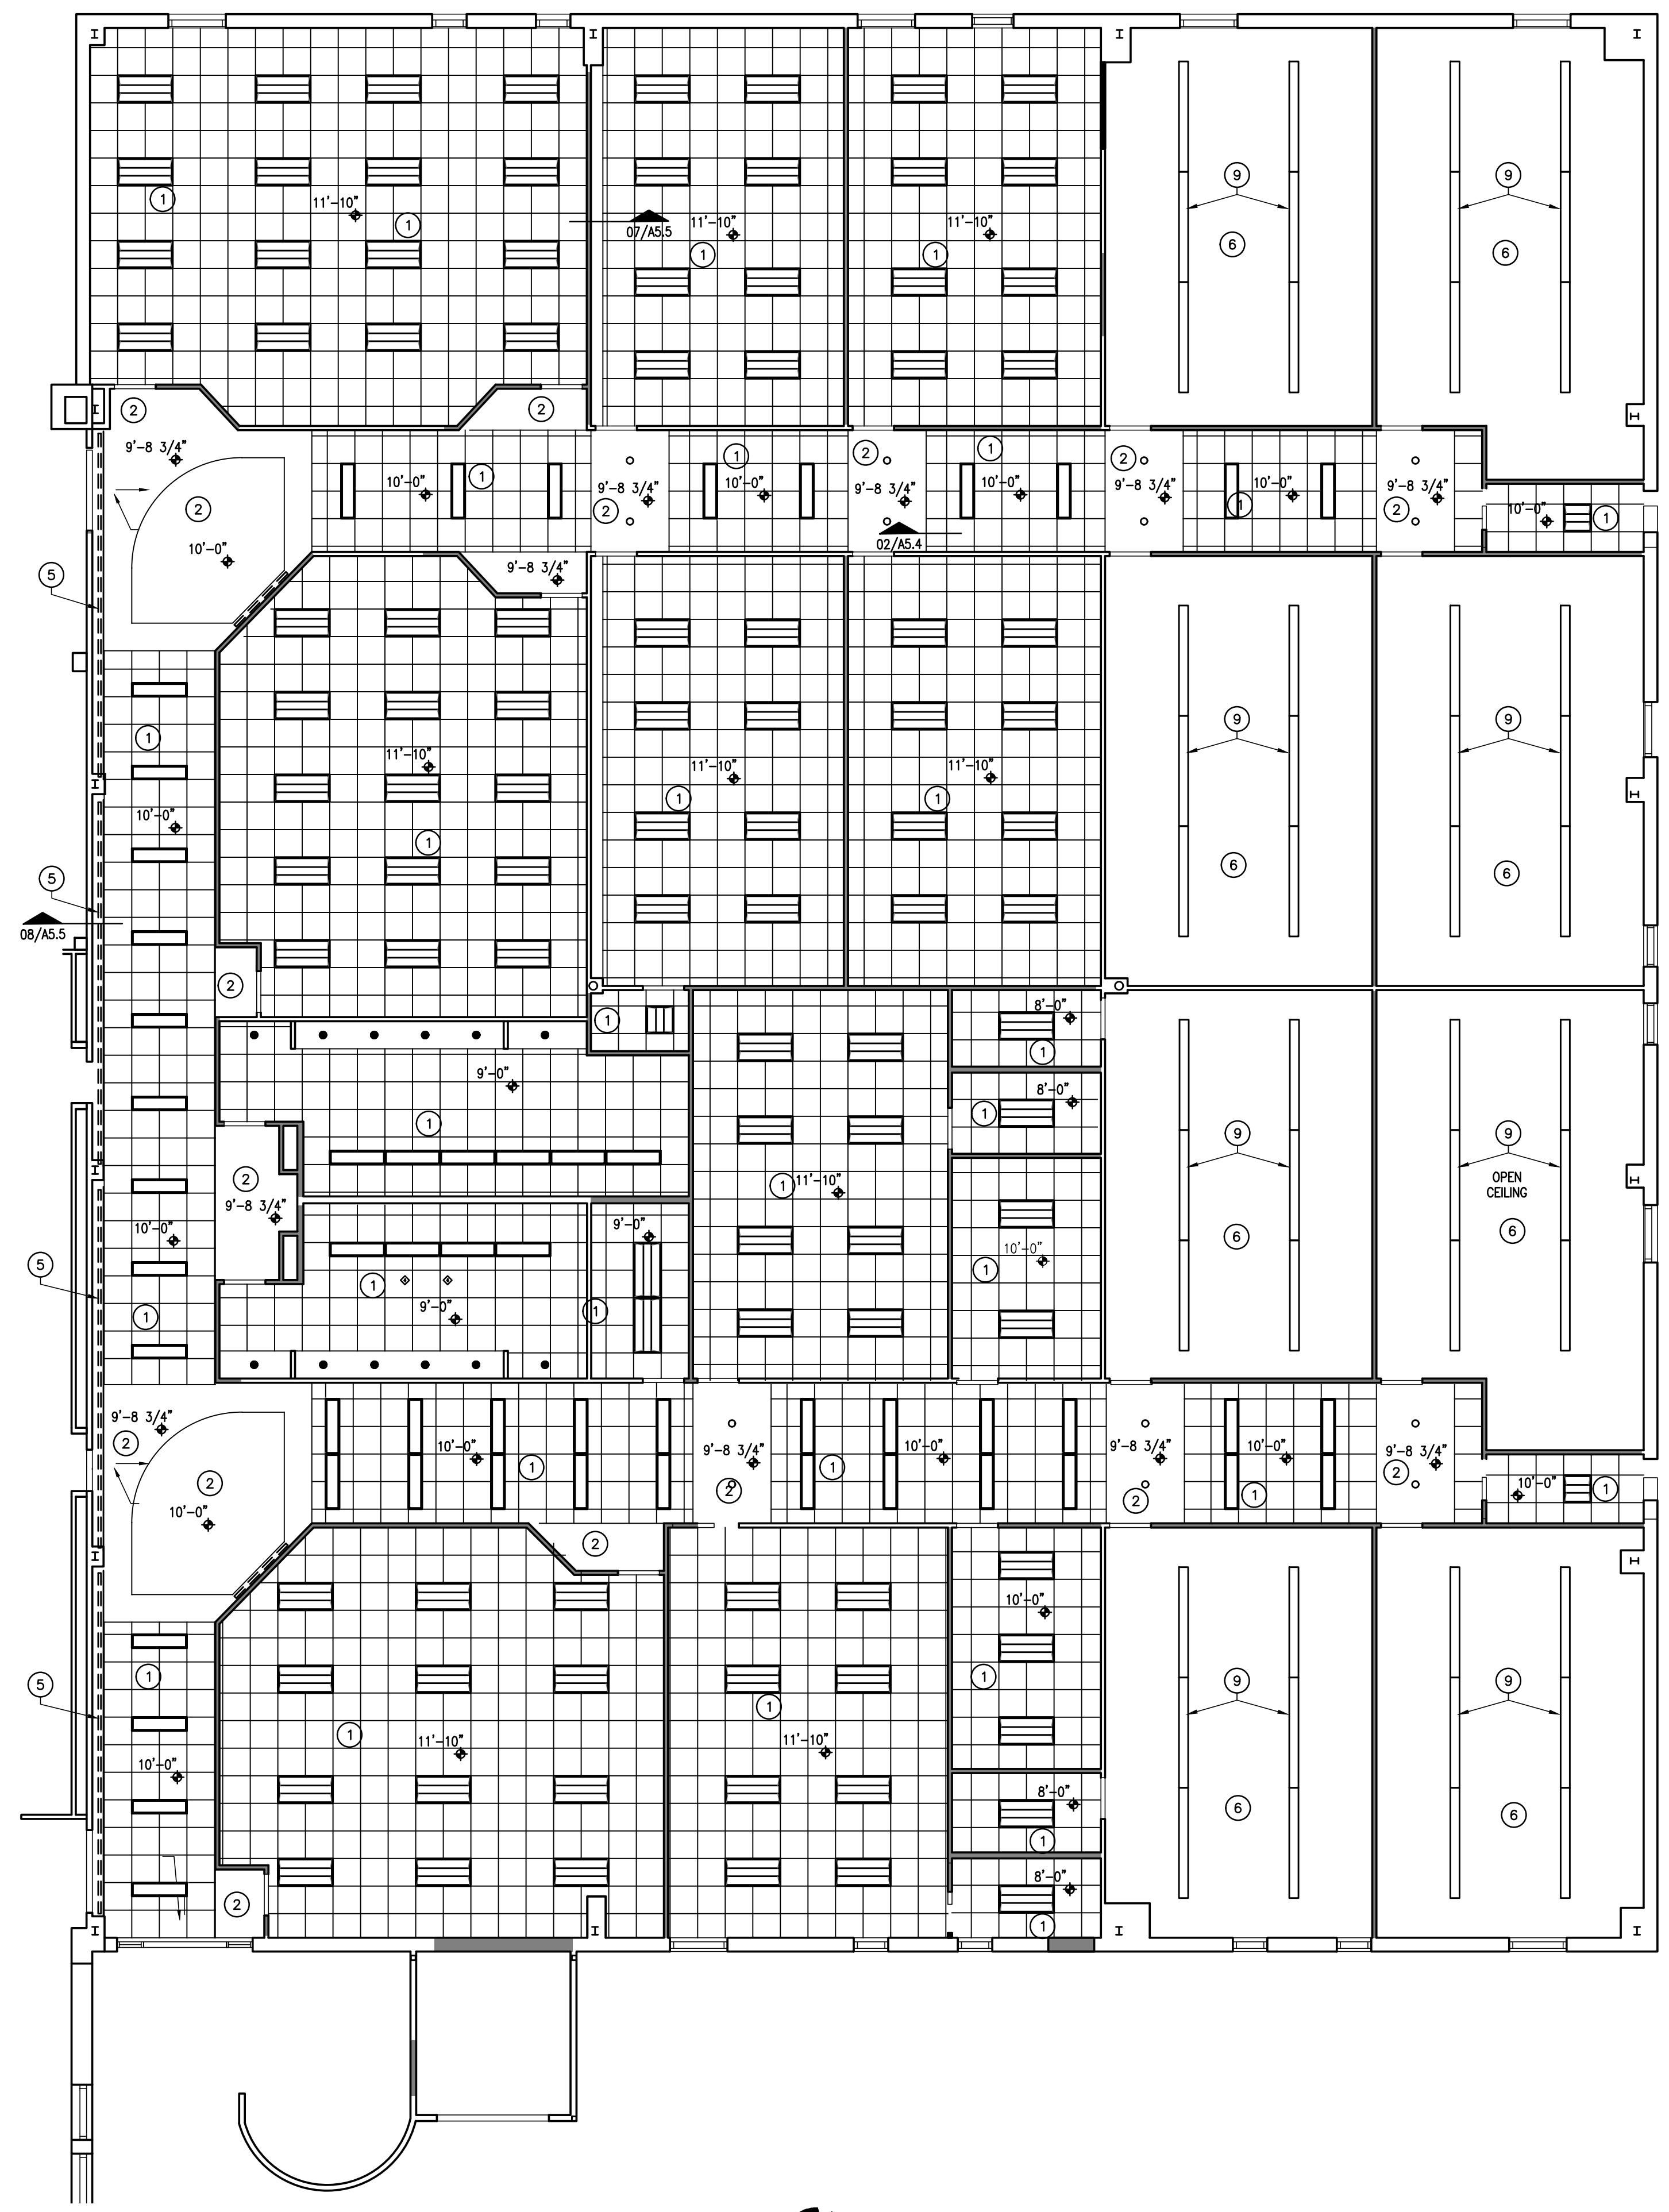


WALL EXTENSION SECTION DETAIL


SCALE: 1-1/2"=1'-0"

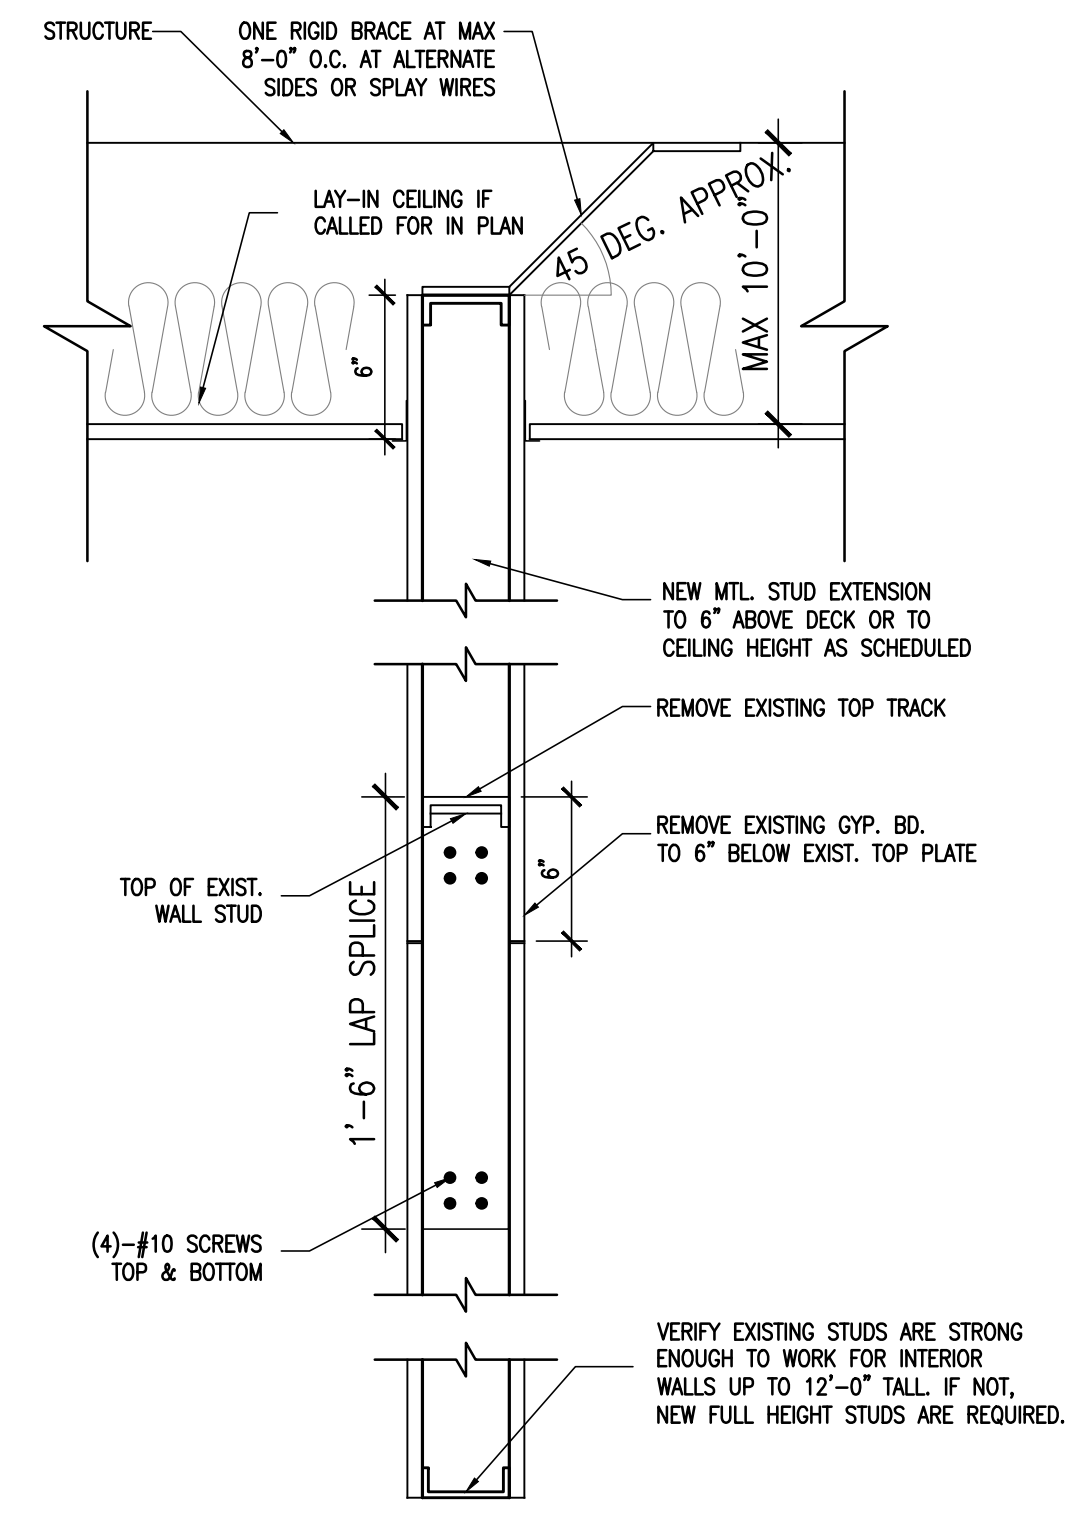

SECTION DETAIL


SCALE: 1-1/2"=1'-0"

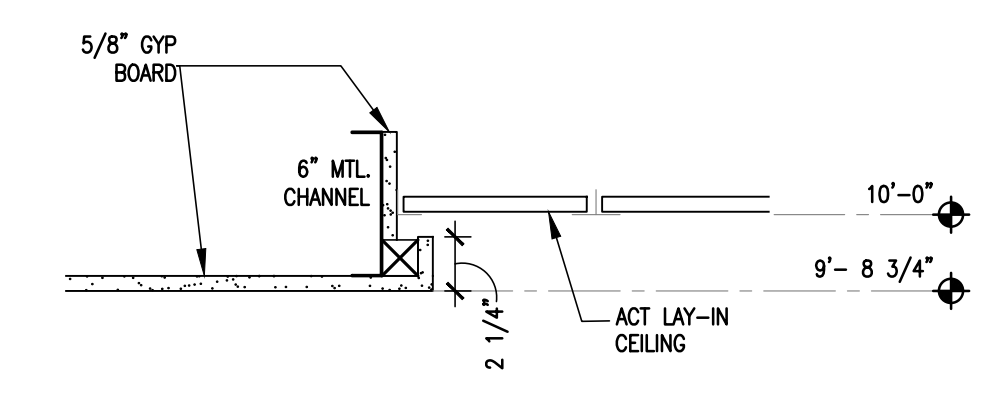

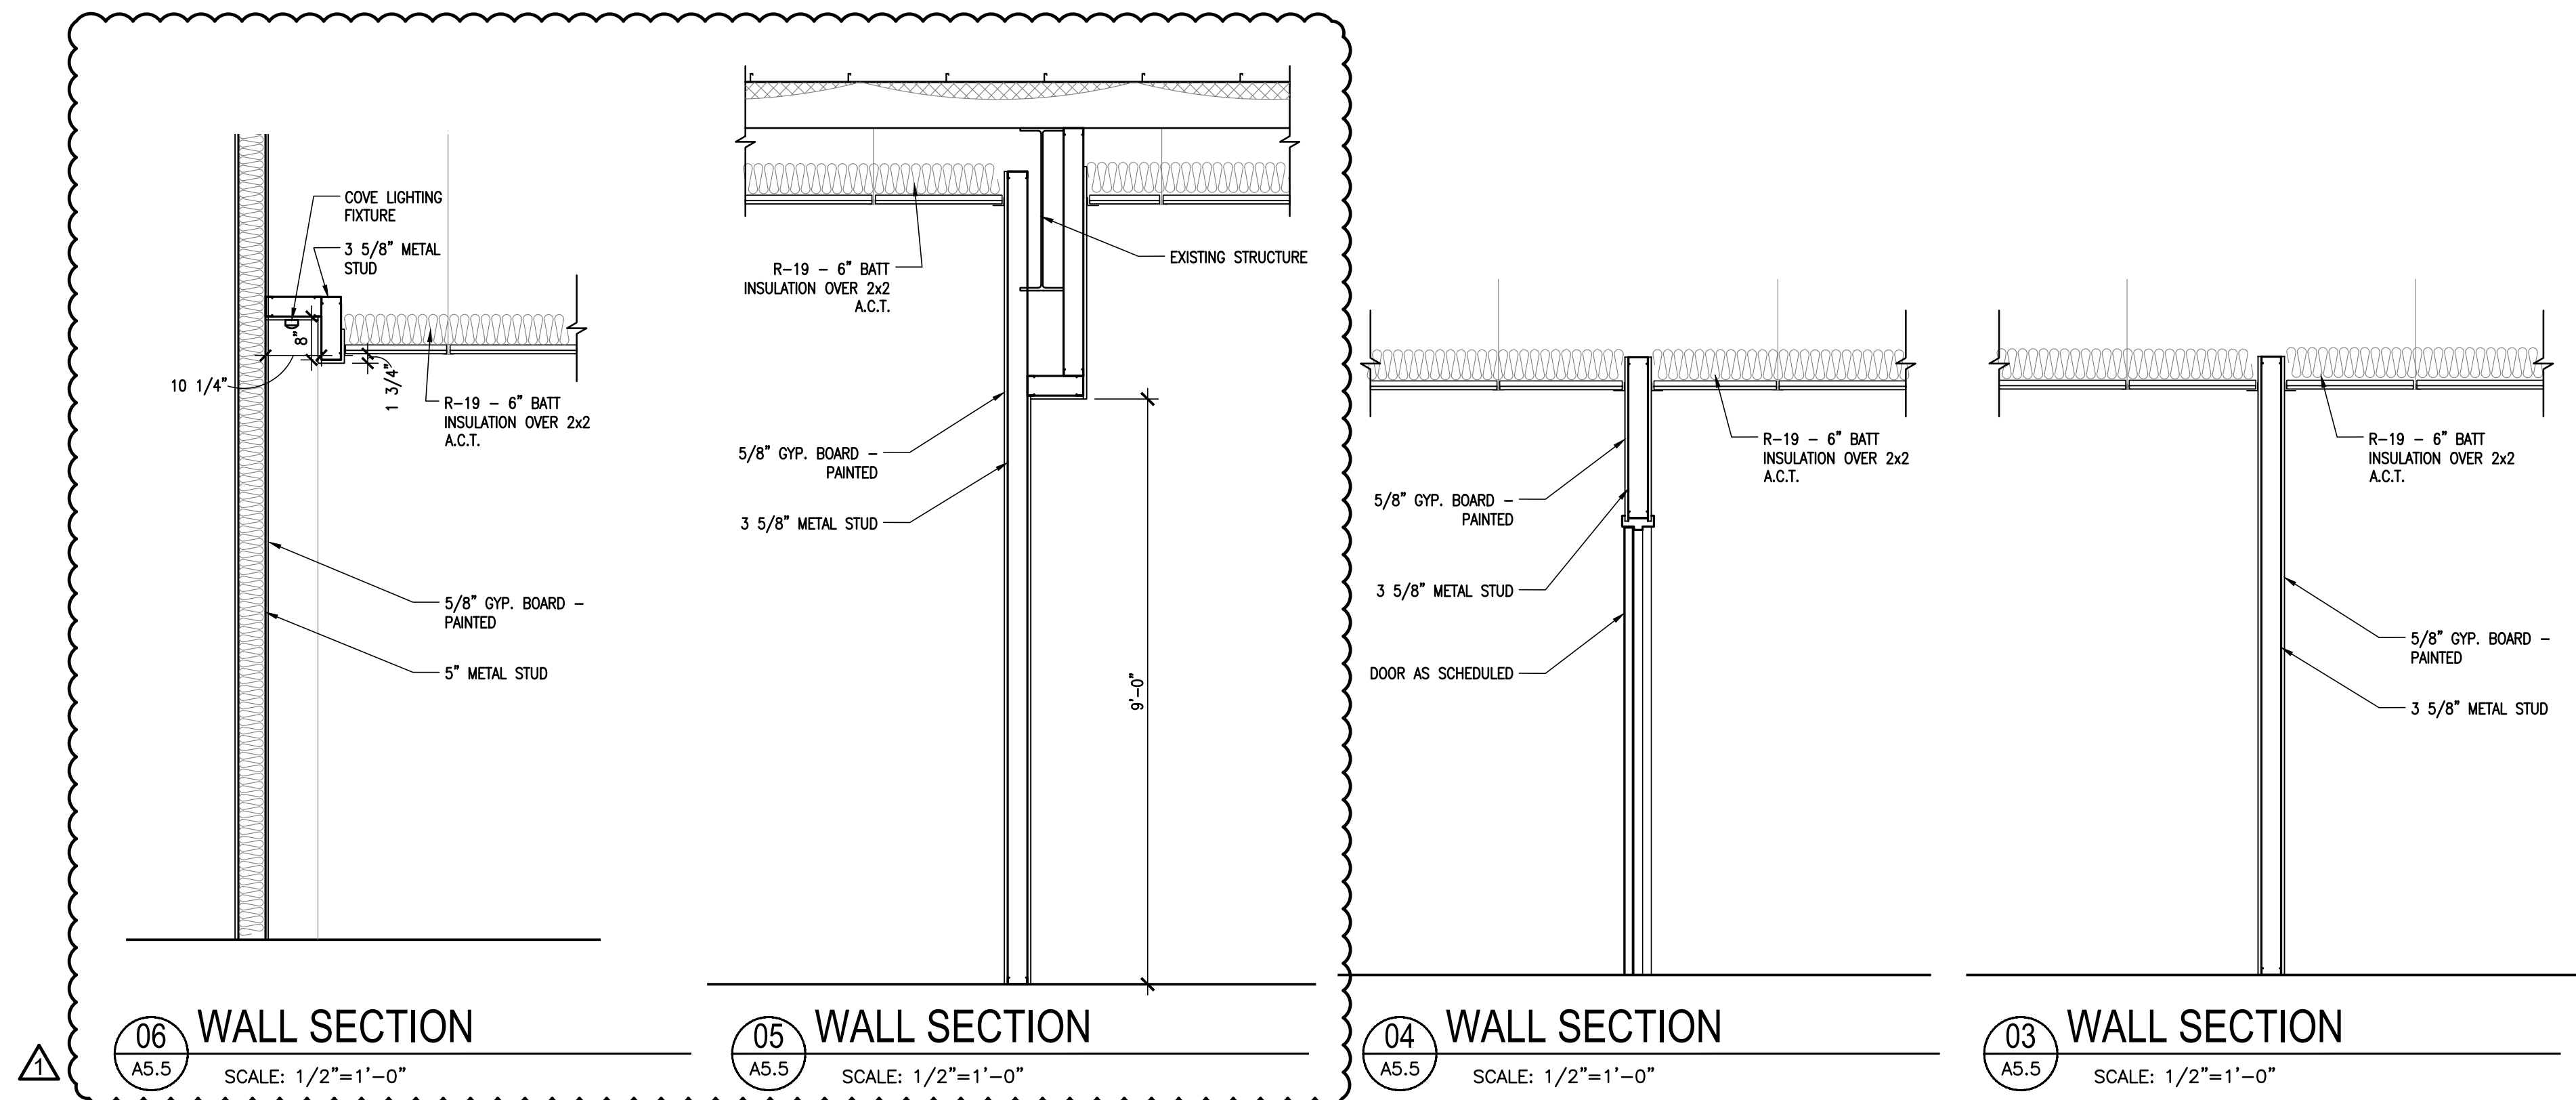


PROSTUD FULL COMPOSITE LIMITING HEIGHTS					
**TAKEN FROM THE 2025 CLARK DIETRICH PRO STUD PRODUCT CATALOG FOR ADDITIONAL INFORMATION AND REQUIREMENTS ON NON-LOAD BEARING WALL CONSTRUCTION.					
5/8" TYPE X GYPSUM					
WIDTH	STUD MEMBER	DESIGN THICKNESS (IN)	YIELD STRENGTH (KSL)	SPACING (IN)	LATORAL LOAD - 5 PSF
3'-5/8"	PROSTUD 25 362PDS125-15	0.0158	50	12	17'-1"
				16	15'-6"
				24	13'-6"
	PROSTUD 20 362PDS125-18	0.0190	70	12	18'-2"
				16	16'-10"
				24	15'-1"
	PROSTUD 30 362PDS125-30	0.0312	33	12	20'-5"
				16	18'-2"
				24	16'-2"
	PROSTUD 33 362PDS125-33	0.0346	33	12	21'-2"
				16	19'-2"
				24	16'-9"

PROSTUD NON-COMPOSITE LIMITING HEIGHTS					
**TAKEN FROM THE 2025 CLARK DIETRICH PRO STUD PRODUCT CATALOG FOR ADDITIONAL INFORMATION AND REQUIREMENTS ON NON-LOAD BEARING WALL CONSTRUCTION.					
5/8" TYPE X GYPSUM					
WIDTH	STUD MEMBER	DESIGN THICKNESS (IN)	YIELD STRENGTH (KSL)	SPACING (IN)	LATORAL LOAD - 5 PSF
3'-5/8"	PROSTUD 25 362PDS125-15	0.0158	50	12	12'-5"
				16	10'-9"
				24	8'-9"
	PROSTUD 20 362PDS125-18	0.0190	70	12	14'-6"
				16	13'-2"
				24	10'-9"
	PROSTUD 30 362PDS125-30	0.0312	33	12	17'-4"
				16	15'-9"
				24	13'-9"
	PROSTUD 33 362PDS125-33	0.0346	33	12	17'-11"
				16	16'-3"
				24	14'-3"

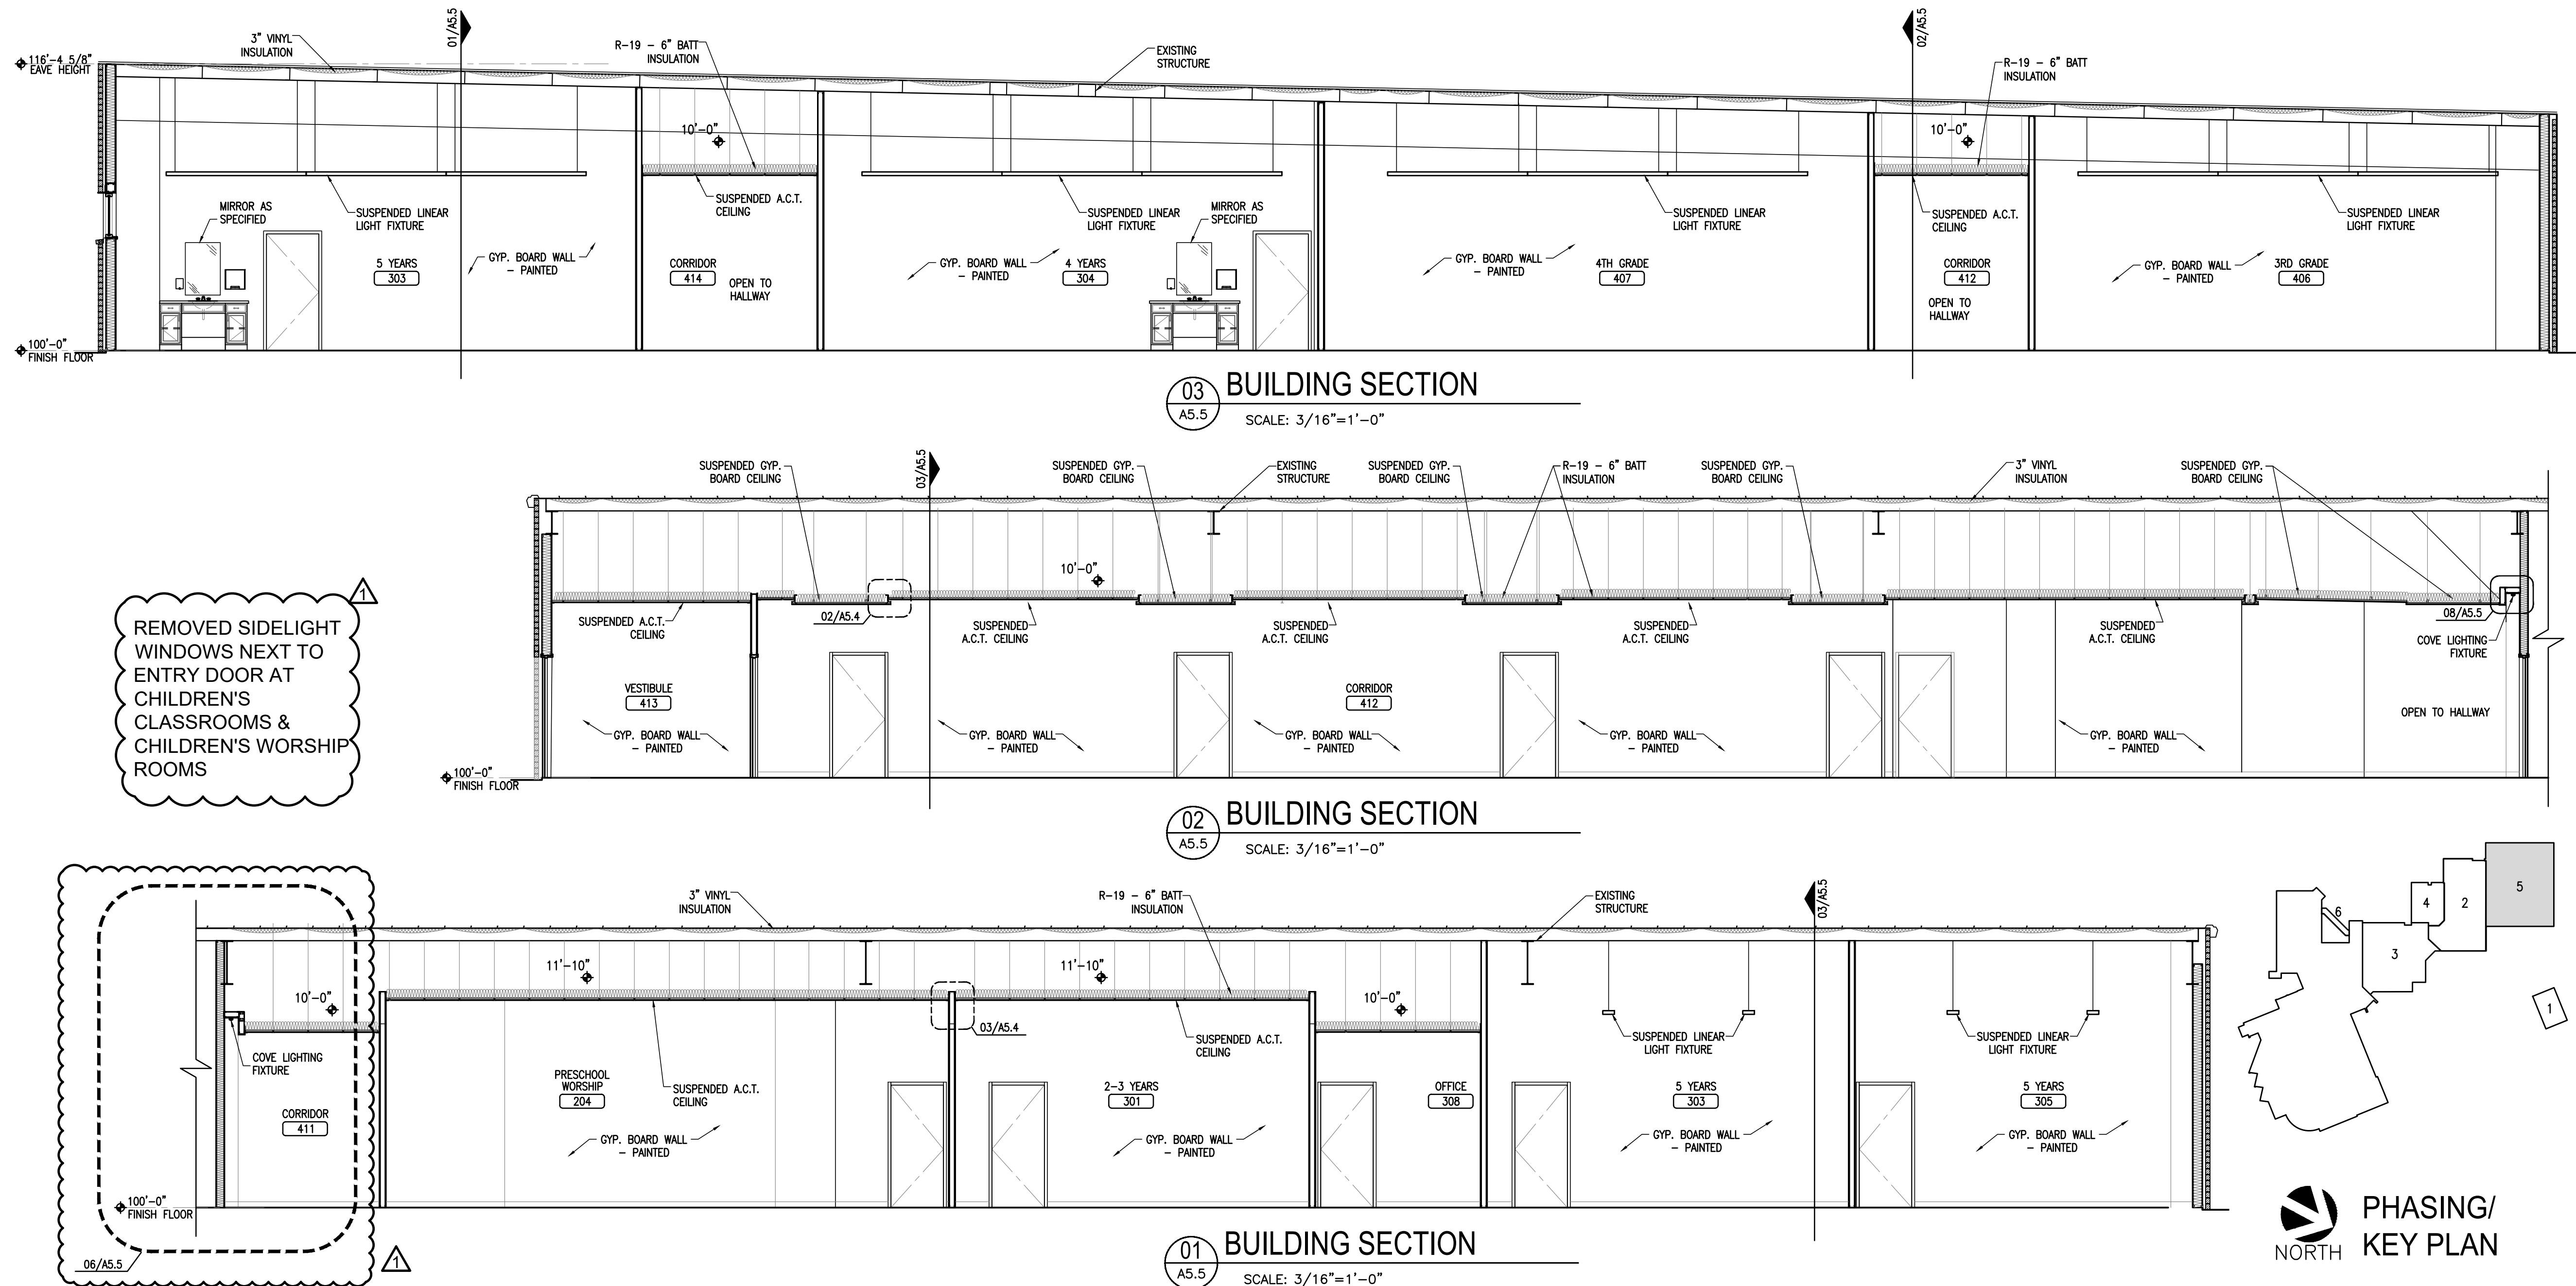


REMOVED SIDELIGHT
WINDOWS NEXT TO
ENTRY DOOR AT
CHILDREN'S
CLASSROOMS &
CHILDREN'S WORSHIP
ROOMS

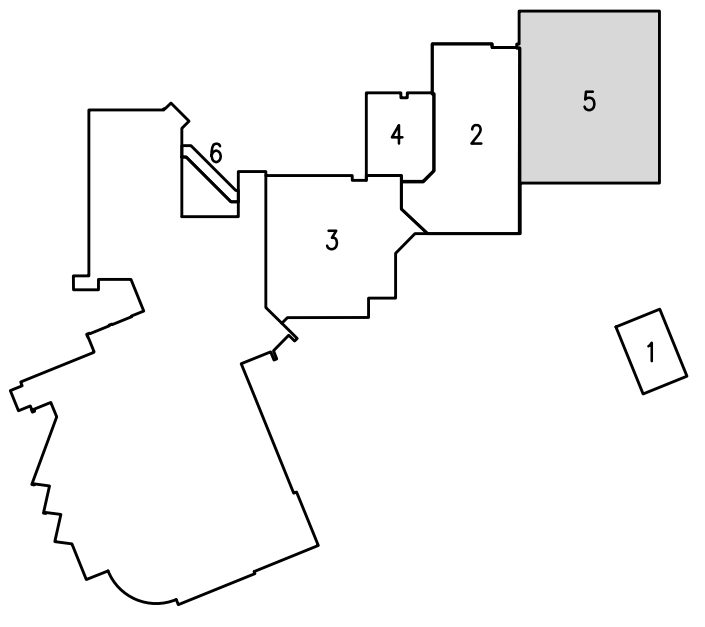

PHASING/
KEY PLAN

ARCHITECTURE
PLANNING
INTERIOR DESIGN

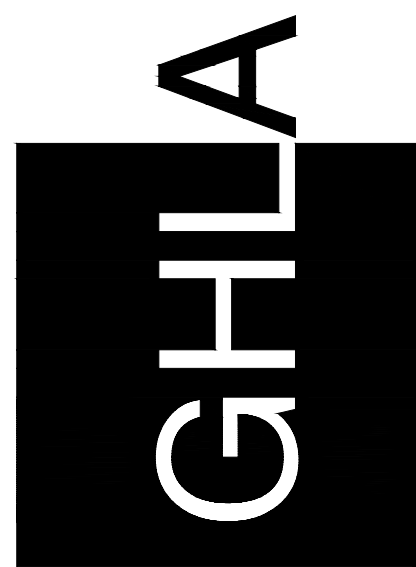

NORTHWOOD CHURCH
RENOVATIONS
1870 RUFE SNOW DR.
KELLER, TEXAS 76248



DATE: 08/14/24
ISSUE:
-
-
-
REVISION:
A REVISED 04-30-25
-
-
-
SHEET TITLE:

PHASE 5
BUILDING
SECTIONS

A5.5

